

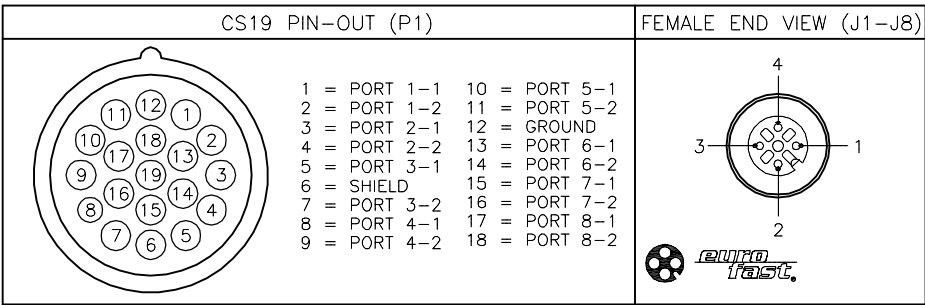


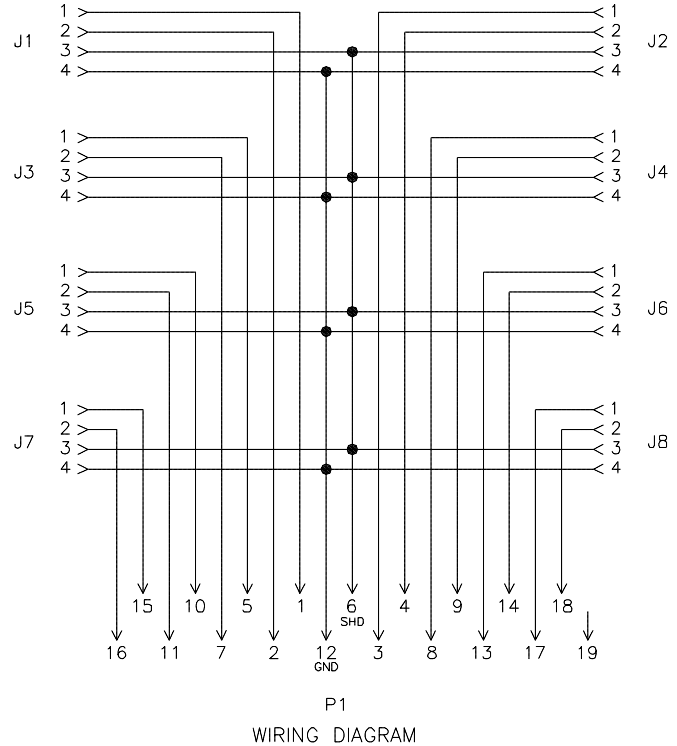


SPECIFICATIONS	
HOUSING MATERIAL	DIE-CAST ALUMINUM ALLOY
HOUSING FINISH/COLOR	POWDER COAT/BLACK
RECEPTACLE HOUSING MATERIAL/FINISH	PASSIVATED STAINLESS STEEL
CONTACT CARRIERS MATERIAL (J1-J8)	NYLON
CONTACT CARRIER MATERIAL (P1)	NYLON or PBT/WHITE
CONTACT MATERIAL/PLATING	BRASS/GOLD (ALL)
OPERATING VOLTAGE	150 V
OPERATING CURRENT	3.0 A
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to +90°C (-40°F to +194°F)

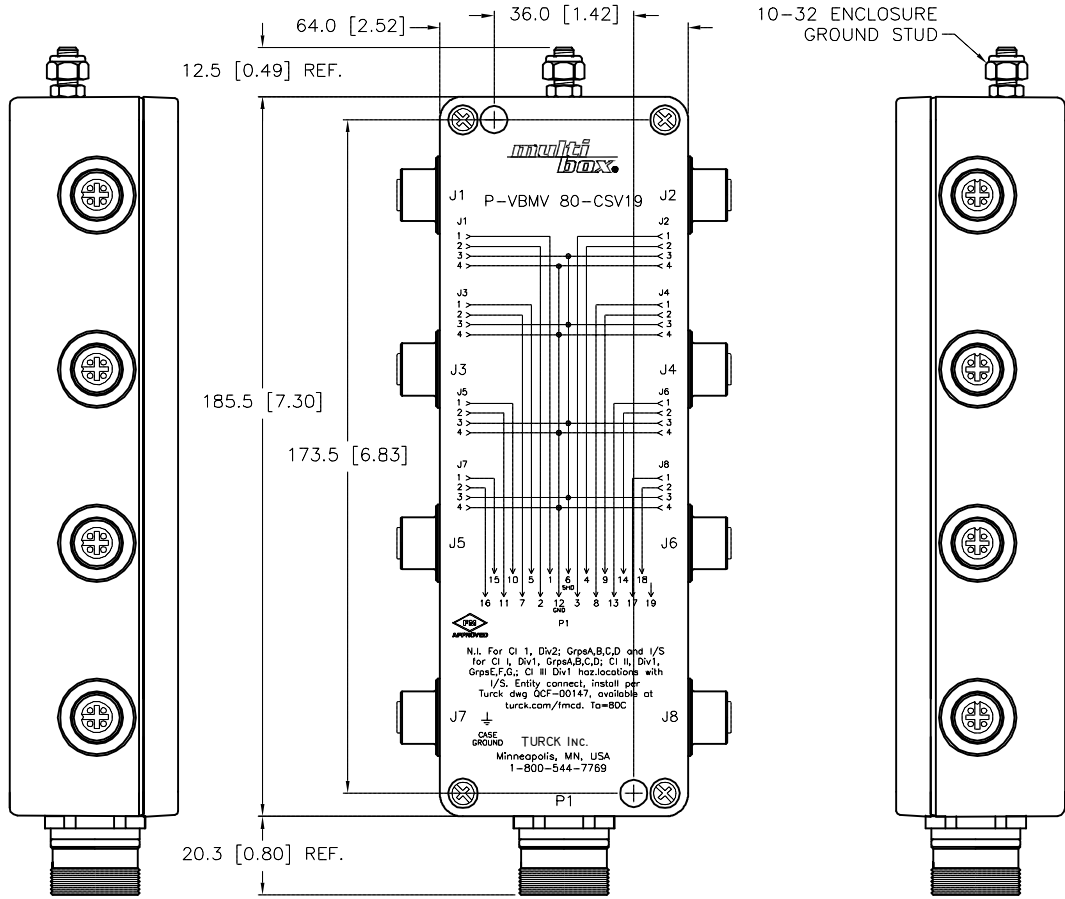


WIRING DIAGRAM

SOURCE DRAWING - FOR REFERENCE ONLY

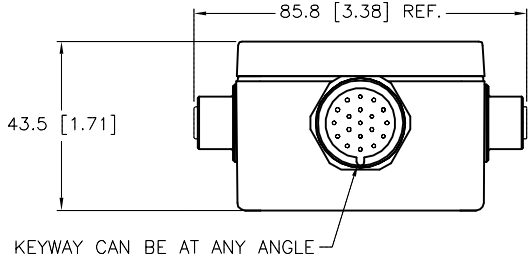

C	UPDATE VOLTAGE AND CURRENT RATINGS	RDS	09/09/13	43326
REV	DESCRIPTION	BY	DATE	ECO NO.

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
MATERIAL SEE SPECIFICATIONS	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	DD	DATE 12/11/03	DESCRIPTION P-VMV 80-CSV19
		APVD		SCALE 1=2.0	
FINISH SEE SPECIFICATIONS	CONTACT TURCK FOR MORE INFORMATION	UNIT OF MEASUREMENT MILLIMETER [INCH]			IDENTIFICATION NO. U0945-34
		DO NOT SCALE THIS DRAWING			REV C
		FILE: U0945-34			SHEET 1 OF 1