

Rated Load**10 A / 250 V****Specifications**

Rated impulse withstand voltage

– All terminals / DIN rail

2.5 kV rms / 1 min

– Terminal / Terminal

2.5 kV rms / 1 min

Cross-section of connecting wire

– Single-wire

4 mm² / AWG 12 or 2 x 2.5 mm² / AWG 14

– Multi-wire

0.34 mm² / AWG 22 - 2.5 mm² / AWG 14

Nominal screw torque

1 Nm

Screw dimensions

M3.5 Philips-slot (combo)

Mounting

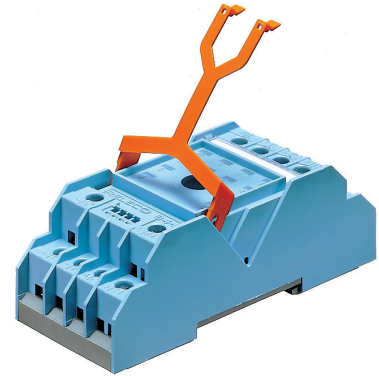
TS-35 or Back Panel Mounting

Ambient temperature

-4060 °C / -40 ... 80 °C (no ice)

Weight

80g

**Included Accessories**

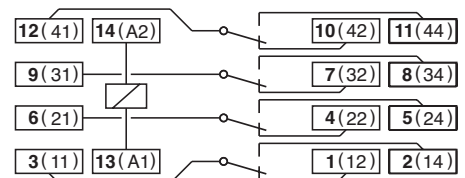
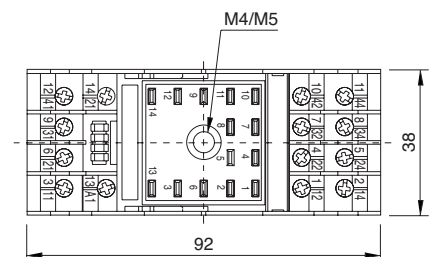
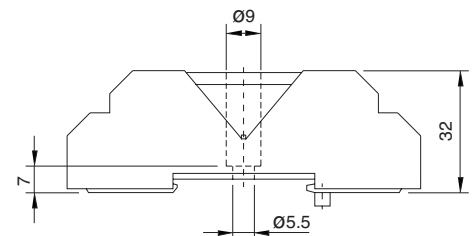
Retaining Clip, plastic

S3-C for C4 / C4x Relays

Optional Accessories

Retaining Clip, plastic

S3-C (BAG 10 PCS) for C4 Relays

**Connection diagram****Dimensions [mm]****Technical approvals, conformities**