

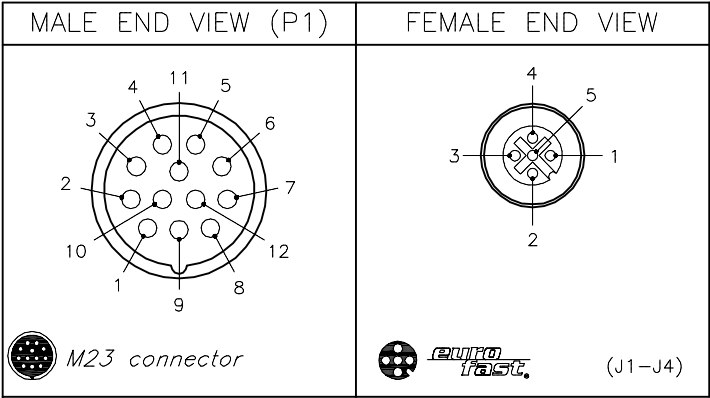


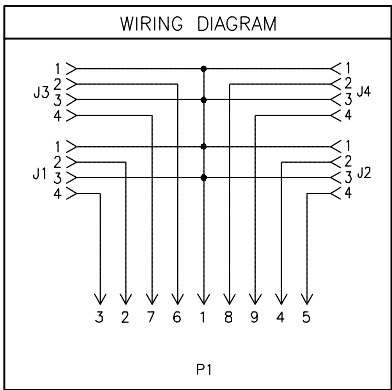

SPECIFICATIONS	
CABLE DATA	
MATING CORDSET	CK 12-0 or CKN 12-9-*
MATERIAL	
HOUSING/COLOR	NYLON/BLUE
CONTACT CARRIERS/COLOR	TPU/BLACK
RECEPTACLE HOUSINGS	NICKEL PLATED BRASS
CONTACTS	GOLD PLATED COPPER ALLOY
SEALING RING	VITON O-RING
CONNECTOR HOUSING	NICKEL PLATED BRASS
ELECTRICAL DATA	
MAXIMUM VOLTAGE	100 VDC
MAXIMUM CURRENT	4 AMPS PER PORT, 8 AMPS TOTAL
SPACINGS	VDE 0110 GROUP C
MECHANICAL DATA	
PROTECTION CLASS to DIN 40050	IP 67 ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-40°C to 90°C (-40°F to 194°F)

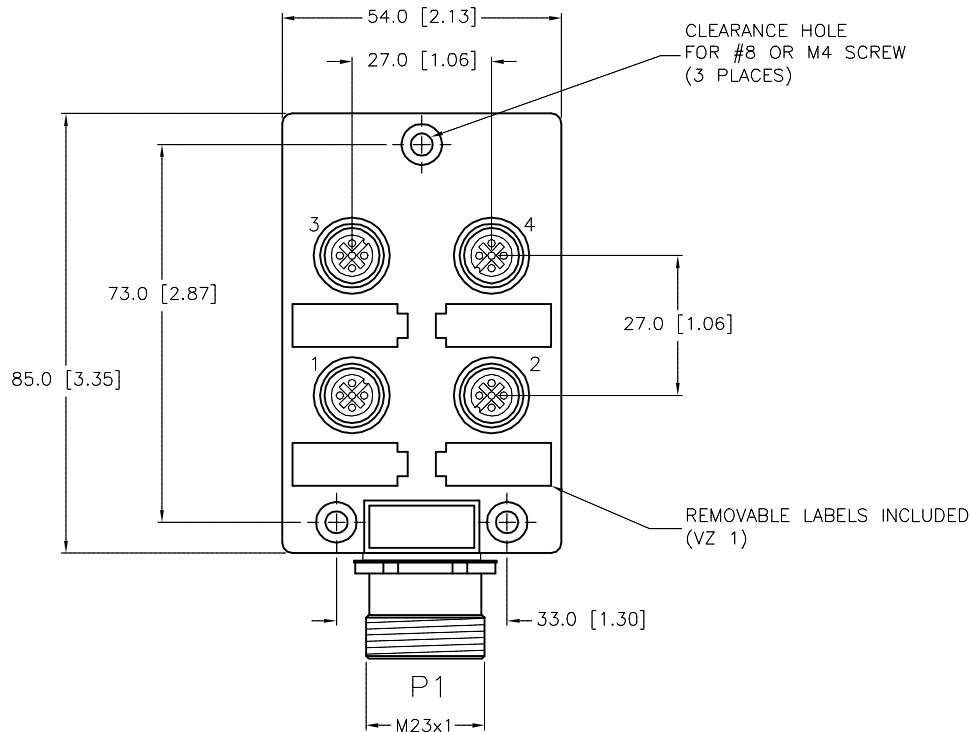


SOURCE DRAWING - FOR REFERENCE ONLY

NOTE:

1. HOUSING HEIGHT: 33.0 mm [1.30 in.]

D	UPDATED CLOSURE CAPS	TV	09/15/15	48811
REV	DESCRIPTION	BY	DATE	ECO. NO.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us			
1. 8-RDV-108 2. 3. 4.									
MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT DF		DATE 01/27/99		DESCRIPTION VB 40.5N-CS12	
				APVD DF		SCALE 1=1.5			
FINISH		CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.		REV	
						U7016-18		D	
				DO NOT SCALE THIS DRAWING		FILE: U7016-18		SHEET 1 OF 1	