

CLOSURE CAPS
(INCLUDED)

NOTE:
1. HOUSING HEIGHT: 33.0 mm [1.30 in.]
2. * = CABLE LENGTH IN METERS.

SPECIFICATIONS

CABLE DATA

MATING CORDSET

RKCN 5T-*

MATERIAL

HOUSING/COLOR

NYLON/BLUE

CONTACT CARRIERS/COLOR

TPU/BLACK

RECEPTACLE HOUSINGS

NICKEL PLATED BRASS

CONTACTS

GOLD PLATED COPPER ALLOY

SEALING RING

VITON O-RING

CONNECTOR HOUSING

NICKEL PLATED BRASS

ELECTRICAL DATA

MAXIMUM VOLTAGE

100 VDC

MAXIMUM CURRENT

4 AMPS PER PORT, 4 AMPS TOTAL

SPACINGS

VDE 0110 GROUP C



MECHANICAL DATA

PROTECTION CLASS to DIN 40050

IP 67 ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED

OPERATING TEMPERATURE


-40°C to 90°C (-40°F to 194°F)

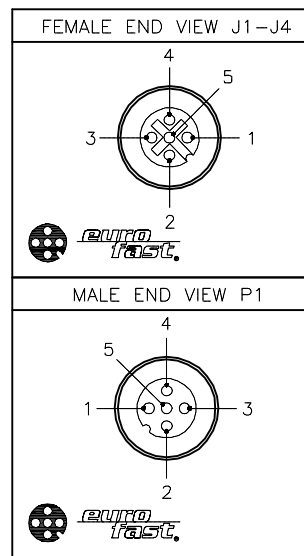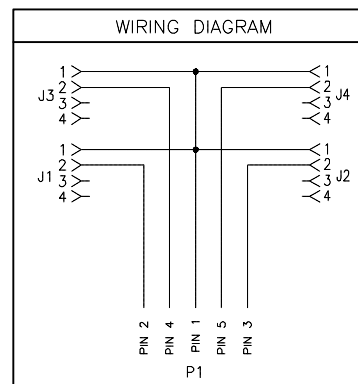

RELATED DOCUMENTS

- 8-RDV-108
-
-
-

3RD ANGLE PROJECTION



THIS DRAWING IS
CONFIDENTIAL AND THE
PROPERTY OF TURCK
INC. USE OF THIS
DOCUMENT WITHOUT
WRITTEN PERMISSION IS
PROHIBITED.

DRFT DF

DATE 01/27/99

APVD DF

SCALE 1=1.5

UNIT OF MEASUREMENT

MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

TURCK

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us

DESCRIPTION

VB 40N-H1151

IDENTIFICATION NO.

U7007-5

REV

F

FILE: U7007-5

SHEET 1 OF 1

F	UPDATED CLOSURE CAPS	TV	09/15/15	48811
REV	DESCRIPTION	BY	DATE	ECO NO.