


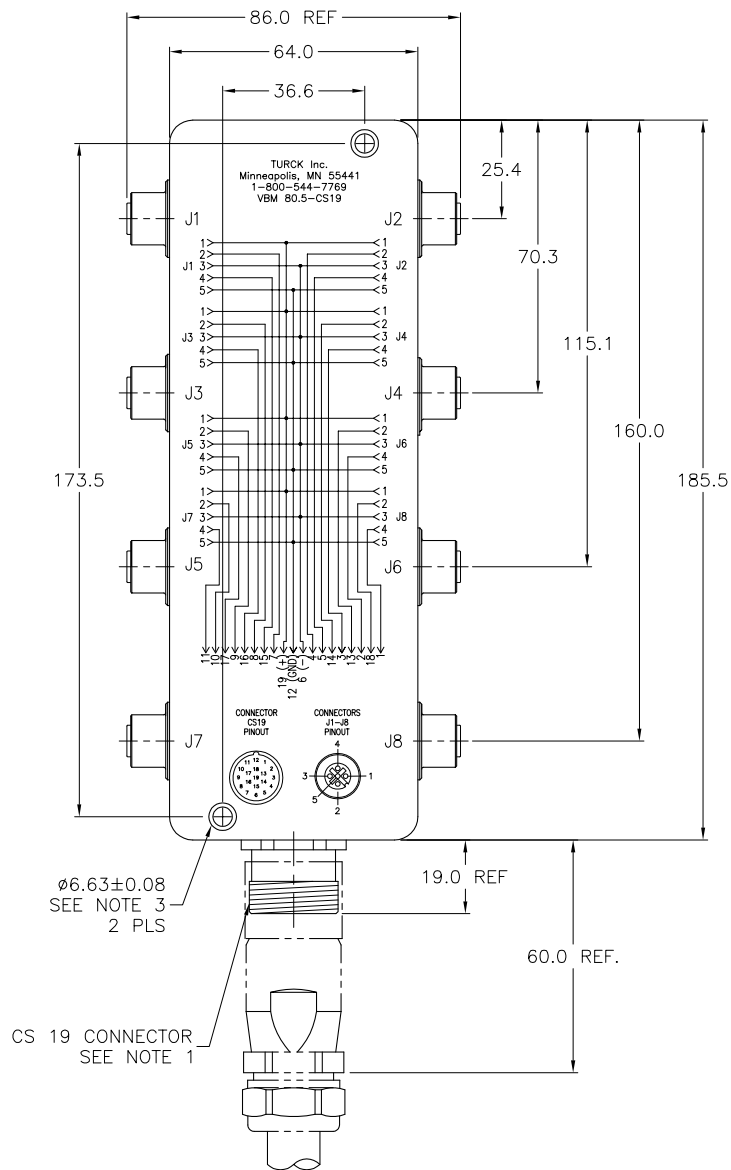

NOTES:

1. USE MATING CORDSET CK 19-19-* (* = CABLE LENGTH IN METERS).
2. BOX HEIGHT = 34.5 NOMINAL.
3. CLEARANCE HOLE FOR M4 [#8] MOUNTING SCREWS (2 NOT INCLUDED).

SPECIFICATIONS

CABLE DATA

MATING PLUG CABLE

CK 19-0 or CK 19-19-*

MATERIAL

HOUSING

ALUMINUM ALLOY

CONNECTOR

NICKEL PLATED BRASS

CONTACT CARRIERS/COLOR

TPU/BLACK

CONTACTS

GOLD PLATED BRASS

ELECTRICAL DATA

OPERATING VOLTAGE

10-48 VDC

OPERATING CURRENT

4.0 A per PORT, 8 A TOTAL

PROTECTION CLASS to DIN 40050


IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED

OPERATING TEMPERATURE



-40°C to 90°C (-40°F to 194°F)

CS 19 PIN-OUT

WIRING DIAGRAM



J1-J8 PIN-OUT

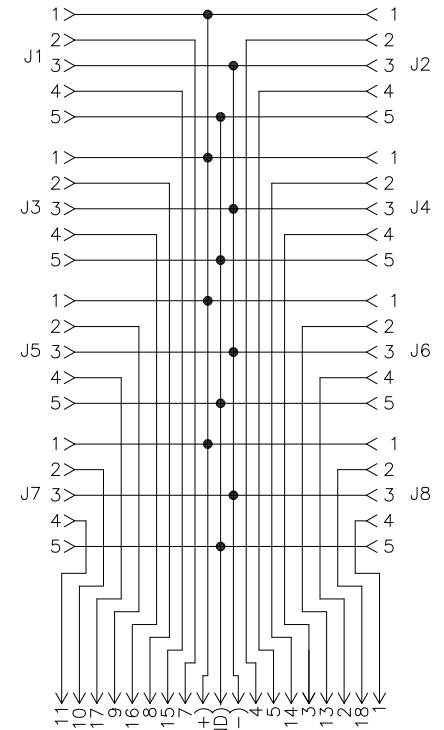


SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS

- 1.
- 2.
- 3.
- 4.

3RD ANGLE PROJECTION



THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

MATERIAL

FINISH

ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

DRFT IK

DSGN

UNIT OF MEASUREMENT

MILLIMETERS

DO NOT SCALE THIS DRAWING

TURCK INC
High Technology Sensors and Automation Controls

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
turck.com

DATE 11/11/98

SCALE 1=2

DESCRIPTION

VBM 80.5-CS19

IDENTIFICATION NO.

U0114-13

REV

C

C	DRAWING PROCESSED AS PART OF ECO 33971	CBM	04/07/11	33971
REV	DESCRIPTION	BY	DATE	ECO NO.

FILE: U0114-13

SHEET 1 OF 1