




SPECIFICATIONS						
CONTACT CARRIER MATERIAL	NYLON OR TPU					
CONTACT MATERIAL/PLATING	BRASS/GOLD					
HOUSING/LOCKNUT MATERIAL	BRASS/NICKEL					
RATED CURRENT [A]	2.5 A					
RATED VOLTAGE [V]	250 V					
TERMINAL PIN MATERIAL	PHOSPHOR BRONZE					
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)					
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67					
MAX. PANEL THICKNESS	3.0 [0.12]					

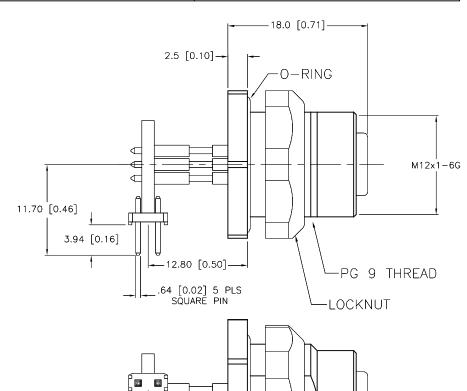

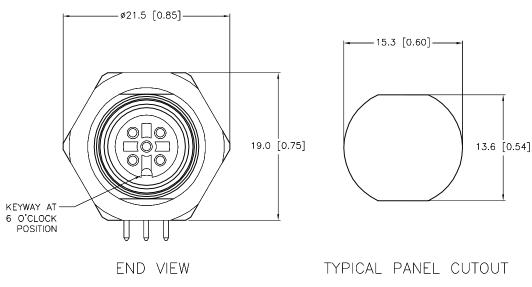



CBM 04/07/11

DATE

D DRAWING PROCESSED AS PART OF ECO 33971

REV DESCRIPTION

SOURCE DRAWING - FOR REFERENCE ONLY

		RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	High Technology	Sensors and Automation Controls	3000 CAMPUS MINNEAPOLIS, MN 1-800-544- (763) 553-7 (763) 553-0 turck.com	N 55441 7769 '300)708 fax
		MATERIAL ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK	DISPLAYED ON THIS	DSGN PLJ	DATE 02/23/05 SCALE 2=1.0	DESCRIPTION WFKD 4.	5-PCBH	
			UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. U2-01916		REV	
	33971 ECO NO.	FOR MORE INFORMATION		DO NOT SCALE THIS DRAWING		FILE: U2-01916	SHEET	1 OF 1