



MALE END VIEW





PIN-OUT DIAGRAM

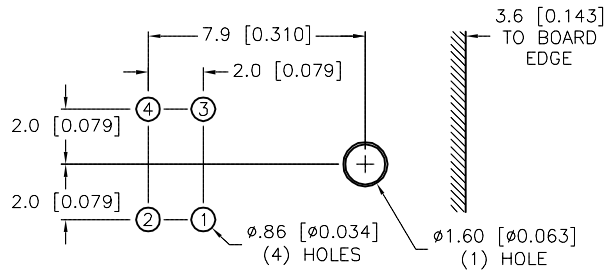

SPECIFICATIONS

CONTACT CARRIER MATERIAL/COLOR	NYLON/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING MATERIAL/PLATING	BRASS/NICKEL
NUMBER OF CONTACTS	4 x 0.025 IN SQ. POSTS
RATED CURRENT [A]	4.0 A
RATED VOLTAGE [V]	30 VAC / 36 VDC
TEMPERATURE RANGE	-30°C to +80°C (-22°F to +176°F)
MAXIMUM PCB THICKNESS	1.6 MM [0.06 IN]
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

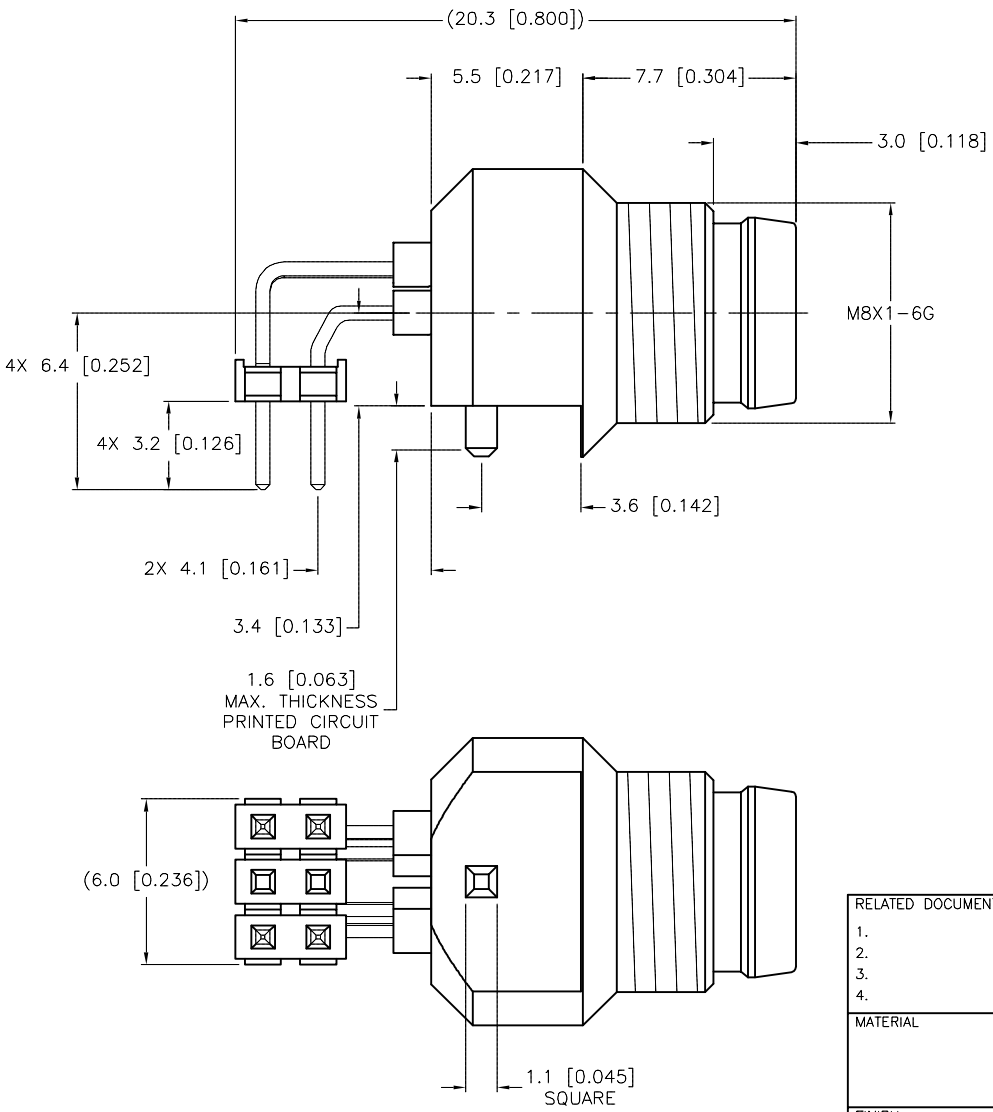

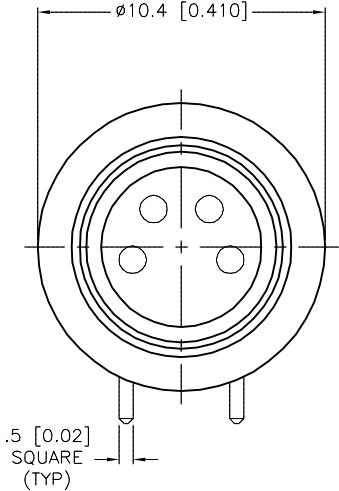

SOURCE DRAWING - FOR REFERENCE ONLY


RELATED DOCUMENTS

1.
2.
3.
4.

MATERIAL

FINISH

3RD ANGLE PROJECTION



ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY

CONTACT TURCK FOR MORE INFORMATION

THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.

DRFT GC
APVD GC

UNIT OF MEASUREMENT
MILLIMETER [INCH]

DO NOT SCALE THIS DRAWING

3000 CAMPUS DRIVE
MINNEAPOLIS, MN 55441
1-800-544-7769
(763) 553-7300
(763) 553-0708 fax
www.turck.us



DATE 01/12/00
SCALE 1=.3

DESCRIPTION
WMFS 4-PCB

IDENTIFICATION NO.
U2369-07

REV
G

G	UPDATE HOLE DIAMETER IN PINOUT DIAGRAM	RDS	01/09/19	68172
REV	DESCRIPTION	BY	DATE	ECO NO.