



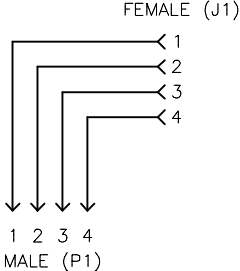
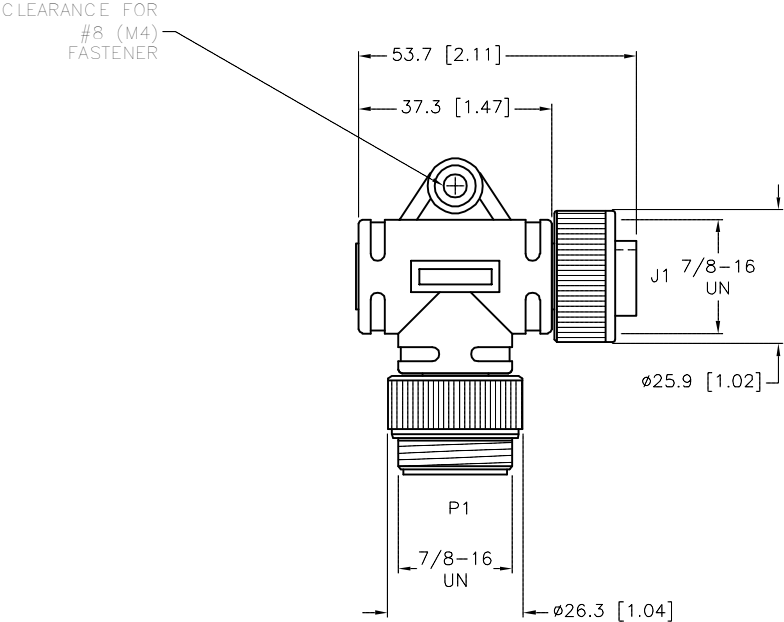
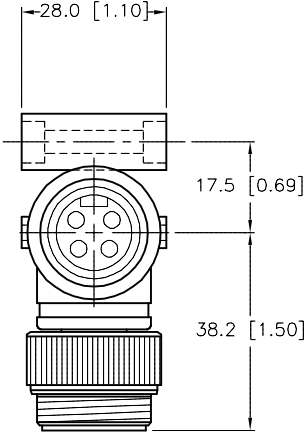
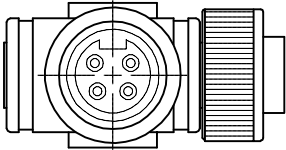



MALE END VIEW (P1)	FEMALE END VIEW (J1)	WIRING SCHEMATIC	SPECIFICATIONS	
 <div> 1 = - VOLTAGE  2 = + VOLTAGE  3 = SHIELD  4 = GROUND </div>  <b>FOUNDATION™ fieldbus</b>	 <div> 1 = - VOLTAGE  2 = + VOLTAGE  3 = SHIELD  4 = GROUND </div>  <b>FOUNDATION™ fieldbus</b>		CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
			MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
			CONTACT MATERIAL/PLATING	BRASS/GOLD
			COUPLING NUT MATERIAL/FINISH	316 STAINLESS STEEL/PASSIVATED
			RATED CURRENT [A]	9.0 A
			RATED VOLTAGE [V]	250 V
			TEMPERATURE RATING	−40°C TO +55°C (−40°F TO 131°F)
			PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67
			INSULATION RESISTANCE	≥ 10 <sup>9</sup> Ω

<div> <div>    </div> </div>				
<div> <div> RELATED DOCUMENTS </div> <div> 1. 2. 3. 4. </div> </div>		<div> <div> 3RD ANGLE PROJECTION </div> <div>  </div> </div>		<div> <div> THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. </div> <div> 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us </div> </div>
<div> <div> MATERIAL </div> <div> FINISH </div> </div>		<div> <div> DRFT GC APVD GC </div> <div> DATE 9/16/98 SCALE 1=1.5 </div> </div>		<div> <div> DESCRIPTION </div> <div> IDENTIFICATION NO. </div> <div> REV </div> </div>
<div> <div> UPDATE RATED VOLTAGE </div> <div> DESCRIPTION </div> </div>		<div> <div> NF 08/02/17 BY DATE </div> <div> 61408 ECO NO. </div> </div>		<div> <div> WSV RKV 49 </div> <div> U2677-8 </div> <div> D </div> </div>
		<div> <div> UNIT OF MEASUREMENT </div> <div> MILLIMETER [ INCH ] </div> </div>		<div> <div> DO NOT SCALE THIS DRAWING </div> <div> FILE: U2677-8 </div> </div>
		<div> <div> CONTACT TURCK FOR MORE INFORMATION </div> </div>		<div> <div> SHEET 1 OF 1 </div> </div>