


XSH-RSM-2RKM 40

2-port Junction Systems – h-Splitter without Cable




Features

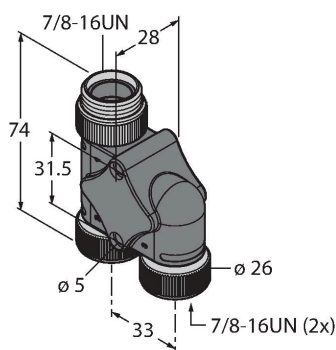

- 7/8" connector
- Male – 2 x female, 4-pin
- Wired in parallel
- cULus listed
- RoHS-compliant
- Protection class: NEMA 1, 3, 4, 6P and IEC IP67


Contact assignment



Pin Assignment

Pin Assignment

Circuit Diagram

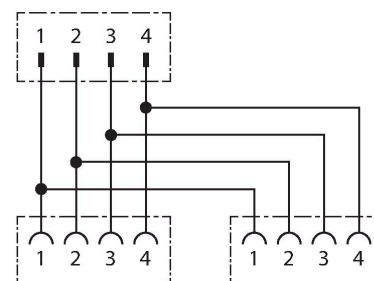

Technical data

Type	XSH-RSM-2RKM 40
ID no.	U2-23666
Distributed I/O	2
Connector A	Male Connector, 2x Female Connector, 7/8"
Number of Pins	4
Contacts	Brass, CuZn, Gold-plated
Contact carriers	Plastic, TPU, Black
Connector body	Plastic, TPU, Black
Coupling nut	Brass, CuZn, Nickel-plated
Mechanical life	> 100 Mating cycles
Protection class (When coupled)	IP67, Only in screwed condition
Cable data	
Electrical properties at +20 °C	
Rated voltage	600 V
Current	9 A
Ambient temperature range (dynamic)	-40 °C...+105 °C
Note	