

CZ - CZA - CZF and MZ - MZA - MZF IL-BRID standard version

inserts

CD	25 poles + ⊕	69
CDD	38 poles + ⊕	77
CDA	16 poles + ⊕	100
CSAH	16 poles + ⊕	101
CDC	16 poles + ⊕	105

page:

hoods with 2 pegs



hoods with 2 pegs, double top entry




description	part No.	entry Pg	part No.	entry M	part No.	entry Pg	part No.	entry M
side entry	CZO 25 L	16	MZO 25 L20	20				
side entry			MZO 25 L25	25				
side entry, high construction	CZAO 25 L16	16	MZAO 25 L20	20				
side entry, high construction	CZAO 25 L21	21	MZAO 25 L25	25				
top entry	CZV 25 L	16						
top entry 2)			MZV 25 L20	20				
top entry, high construction	CZAV 25 L16	16	MZAV 25 L20	20				
top entry, high construction	CZAV 25 L21	21	MZAV 25 L25	25				
side entry, high construction, without adapter 1)	CZFO 25 L16	16	MZFO 25 L20	20				
side entry, high construction, without adapter 1)	CZFO 25 L21	21	MZFO 25 L25	25				
top entry, high construction, without adapter 1)	CZFV 25 L16	16	MZFV 25 L20	20				
top entry, high construction, without adapter 1)	CZFV 25 L21	21	MZFV 25 L25	25				
with pegs for 1 lever, high construction					CZAV 25 L216	16 x 2	MZAV 25 L220	20 x 2
with pegs for 1 lever, high construction, without adapter 1)					CZFV 25 L216	16 x 2	MZFV 25 L220	20 x 2


1) enclosure without adapter, threaded on the body, to be used only with a complete cable gland.

2) can only be used with a complete cable gland (to be purchased separately).


CZO L and MZO L ▲




CZAO L - MZAO L and CZAV L - MZAV L ▲

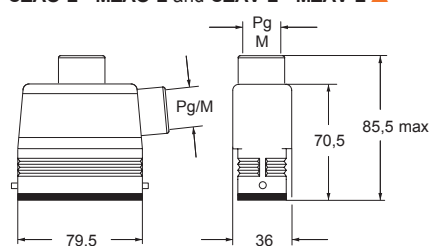


CZV L and MZV L ▲



CZFO L - MZFO L and CZFV L - MZFV L ●



CZAV/CZFV L2 and (MZAV)/MZFV L2 ●

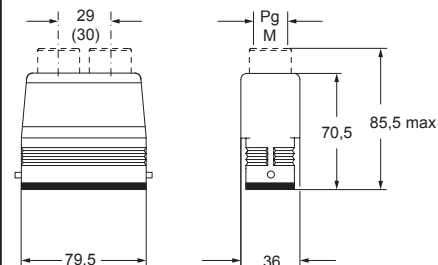

CALUS Type 4/4X/12



▲ insulating cable gland or fittings without gasket



▲ cable gland with O-Ring gasket



● cable gland with O-Ring gasket
IP67 if hoods with fused pegs and without adapters, coupled with IP67 housings