



| WIRING | |
|--------|------------------|
| DIN | MDC |
| 1 | 4 |
| 2 | 3 |
| GND | NOT USED |
| | 1,2 & 5 NOT USED |

| REVISIONS | | | |
|-----------|-----------------|----------|----------|
| REV. | DESCRIPTION | DATE | APPROVED |
| A | INITIAL RELEASE | 5/4/2007 | BEM |

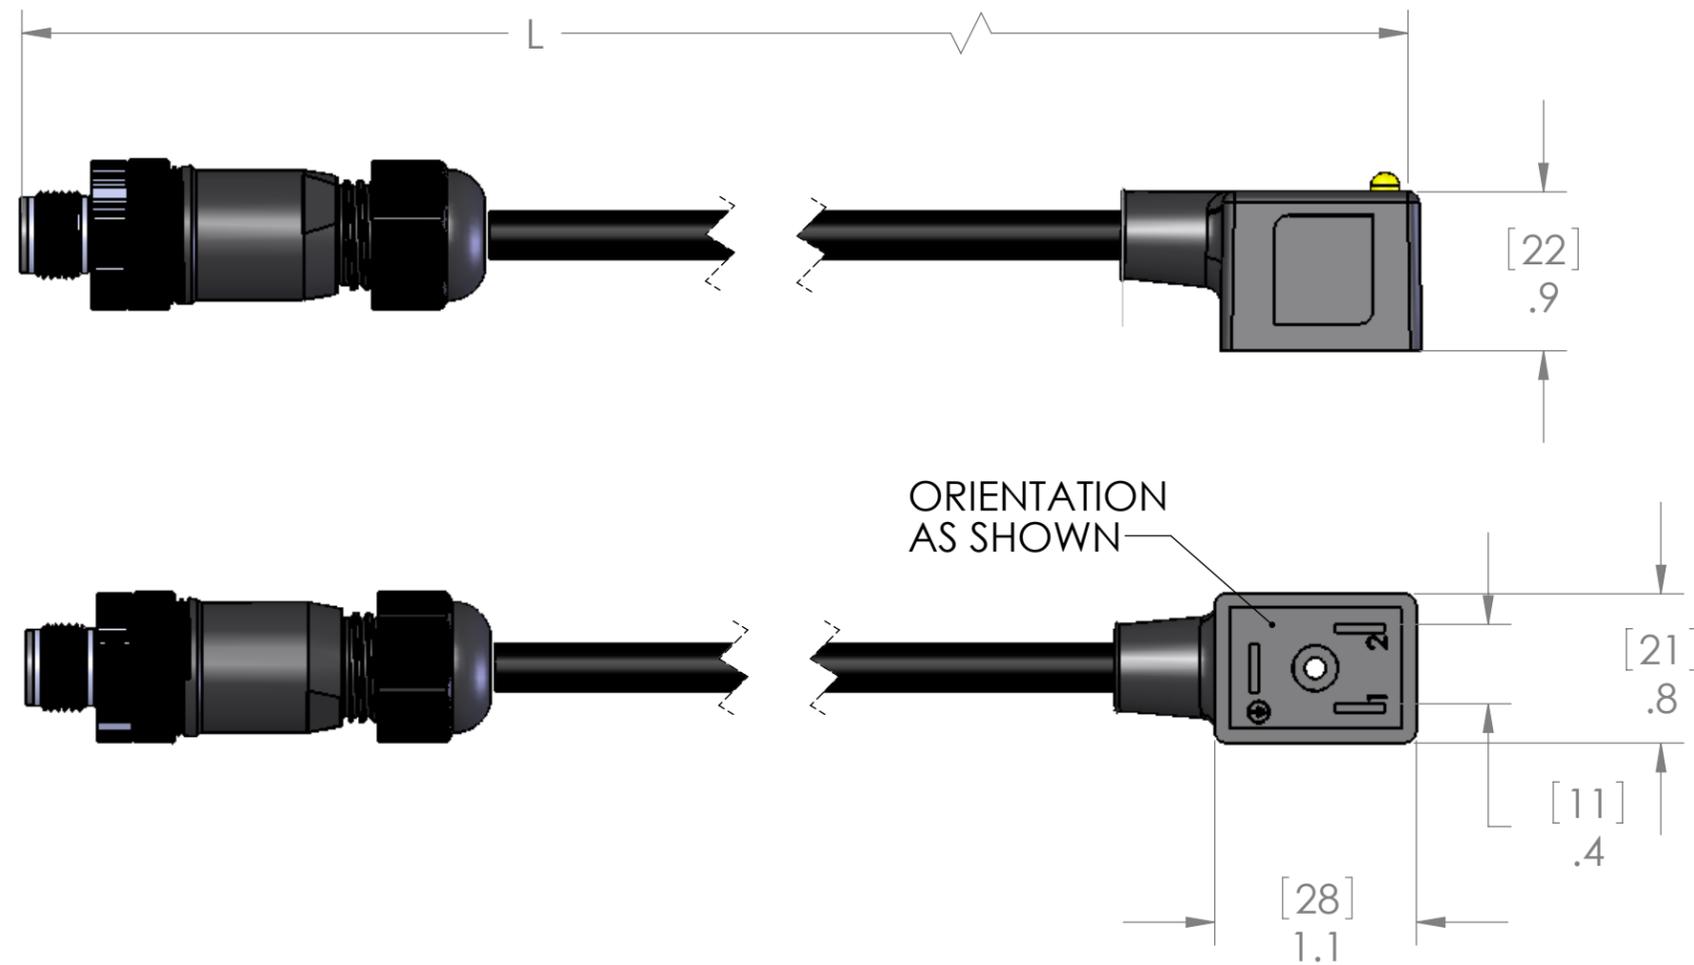

| TABLE A | |
|--------------|------|
| P/N | L |
| VDG-D20-3401 | 0.3M |
| VDG-F20-3401 | 0.5M |
| VDG-120-3401 | 1M |
| VDG-H20-3401 | 1.5M |
| VDG-220-3401 | 2M |
| VDG-320-3401 | 3M |
| VDG-420-3401 | 4M |
| VDG-520-3401 | 5M |
| VDG-620-3401 | 6M |
| VDG-820-3401 | 8M |
| VDG-A20-3401 | 10M |

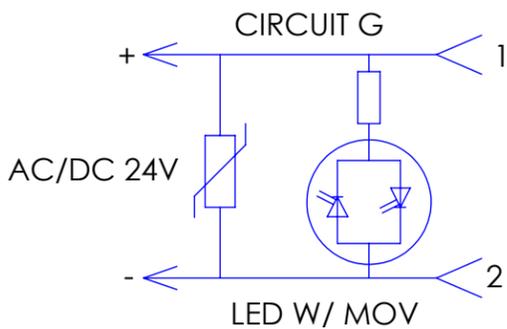

| MATERIAL | |
|----------------------|--------------------------------|
| DIN CONNECTOR | |
| BODY: | BLACK POLYAMIDE |
| CONTACTS: | COPPER ALLOY W/ SILVER PLATED |
| GASKET: | THERMOPLASTIC RUBBER |
| SCREW: | STEEL ZINC PLATE |
| MDC CONNECTOR | |
| BODY: | BLACK POLYAMIDE |
| INSULATOR: | BLACK POLYAMIDE |
| CONTACTS: | COPPER ALLOY W/ GOLD PLATING |
| COUPLING NUT: | NICKEL PLATED BRASS |
| TEMPERATURE: | -40°C TO 80°C (-40°F - 176°F) |
| PROTECTION: | IP65 |

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

| UNLESS OTHERWISE SPECIFIED: | | NAME |
|-----------------------------------|-----------|------|
| DIMENSIONS ARE IN INCHES AND [MM] | DRAWN | CAM |
| | CHECKED | |
| | ENG APPR. | |
| | MFG APPR. | |
| | Q.A. | |
| | COMMENTS: | |
| MATERIAL | | |
| FINISH | | |
| DO NOT SCALE DRAWING | | |

| | | |
|---------------------------|---------------|--------------|
| MENCOM CORPORATION | | |
| TITLE: | | |
| SIZE | DWG. NO. | REV |
| B | VDG-ZZ20-3401 | A |
| SCALE: 1:1 | WEIGHT: | SHEET 1 OF 1 |