


NI50U-CK40-VP4X2-H1141 Inductive Sensor

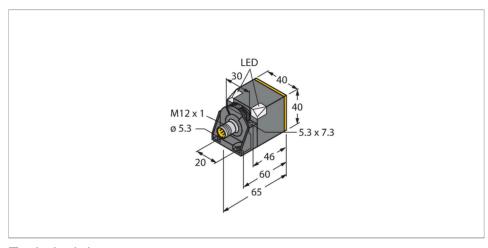


Technical data

Туре	NI50U-CK40-VP4X2-H1141
Ident. no.	1538302
Rated switching distance	50 mm
Mounting conditions	Non-flush, flush
Secured operating distance	≤ (0.81 × Sn) mm
Repeat accuracy	≤ 2 % of full scale
Temperature drift	≤ ± 10 %
	≤ ± 20 %, ≤ -25 °C v ≥ +70 °C
Hysteresis	315 %
Ambient temperature	-30+85 °C
Operating voltage	1065 VDC
Residual ripple	≤ 10 % U _{ss}
DC rated operational current	≤ 200 mA
No-load current	≤ 15 mA
Residual current	≤ 0.1 mA
Isolation test voltage	≤ 0.5 kV
Short-circuit protection	yes / Cyclic
Voltage drop at I _e	≤ 1.8 V
Wire breakage/Reverse polarity protection	yes / Complete
Output function	4-wire, Complementary contact, PNP
Insulation class	
Switching frequency	0.25 kHz
Design	Rectangular, CK40
Dimensions	65 x 40 x 40 mm

Features

- Rectangular, height 40 mm
- Variable orientation of active face in 5 directions
- ■Plastic, PBT-GF30-V0
- High luminance corner LEDs
- Optimum view on supply voltage and switching state from any position
- Factor 1 for all metals
- ■Increased switching distance
- ■Protection class IP68
- Resistant to magnetic fields
- Auto-compensation protects against predamping
- Partially embeddable
- DC 4-wire, 10...65 VDC
- Changeover contact. PNP output
- ■M12 x 1 male connector

Wiring diagram



Functional principle

Inductive sensors are designed for wear-free and contactless detection of metal objects. uprox+ sensors have significant advantages due to their patented multi-coil system. They excel thanks to their optimum switching distances, maximum flexibility and operational reliability as well as efficient standardization.




Technical data

	variable orientation of active face in 5 directions
Housing material	Plastic, PBT-GF20-V0, Black
Active area material	Plastic, PA12-GF30, yellow
Electrical connection	Connector, M12 × 1
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP68
MTTF	874 years acc. to SN 29500 (Ed. 99) 40 °C
Power-on indication	2 × LEDs, Green
Switching state	2 × LEDs, Yellow
Included in delivery	Fixing clamp BS4-CK40

Mounting instructions

Mounting instructions/Description

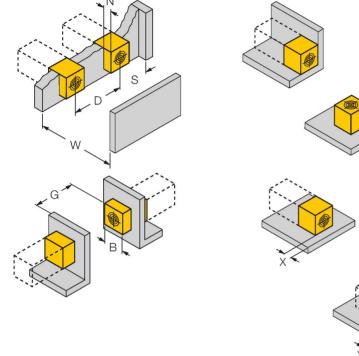

Y	
^ ^ ^	
-/ × × `	\ -
	\times
	\rightarrow

Distance D	240 mm
Distance W	105 mm
Distance S	60 mm
Distance G	300 mm
Distance N	30 mm
Width active area B	40 mm

Flush mounting

1-side mounting: Sr = 35 mm; D = 240 mm 2-side mounting: Sr = 25 mm; D = 240 mm 3-side mounting: Sr = 20 mm; D = 80 mm 4-side mounting: Sr = 15 mm; D = 60 mm

Backside as well as recessed mounting with reduced switching distance

Recessed mounting in metal:

x = 10 mm: Sr = 20 mm

x = 20 mm: Sr = 20 mm

x = 30 mm: Sr = 20 mm

x = 40 mm: Sr = 20 mm

Protruded mounting:

y = 10 mm: Sr = 40 mm

y = 20 mm: Sr = 50 mm

y = 30 mm: Sr = 50 mm

y = 40 mm: Sr = 50 mm

Mounting in aperture plate:

T = 150 mm:

Sensor with twisted turning angle

On metal Sr = 50 mm


Metal-enclosed on one side Sr = 25 mm

Metal-enclosed on two sides Sr = 15 mm

Metal-enclosed on three sides Sr = 12 mm


The values stated relate to a 1 mm thick steel plate.

Accessories



6901318

Mounting clamp for rectangular housings 40 x 40 mm; material: Polypropylene



Connection cable, female M12, straight, 4-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com