



BI6R-Q14-AP6X2-H1141 Inductive Sensor – Ring Sensor



Features

- Rectangular, height 14 mm
- Plastic, PBT-GF30-V0
- Static output behaviour
- Output pulse length min. 100 ms
- DC 3-wire, 10...30 VDC
- NO contact, PNP output
- M12 x 1 male connector

Wiring diagram



Functional principle

Inductive sensors detect metal objects contactless and wear-free. For this purpose they use a high-frequency electromagnetic AC field that interacts with the target. Inductive ring sensors generate this field through an LC resonant circuit. The target acts as the coil core.

Technical data


Type	BI6R-Q14-AP6X2-H1141
Ident. no.	1407000
Inside ring diameter D	6.1 mm
Steel ball diameter (DIN 5401)	≥ 2 mm
Fly-by speed	1...28 m/s
pulse stop	≥ 5 ms
Pulse duration at the output	≥ 100 ms ± 20 %
Ambient temperature	-25...+70 °C
Operating voltage	10...30 VDC
Residual ripple	≤ 10 % U _{ss}
DC rated operational current	≤ 200 mA
No-load current	≤ 15 mA
Residual current	≤ 0.1 mA
Isolation test voltage	≤ 0.5 kV
Short-circuit protection	yes / Cyclic
Voltage drop at I _a	≤ 1.8 V
Wire breakage/Reverse polarity protection	yes / Complete
Output function	3-wire, NO contact, PNP
Switching frequency	0.008 kHz
Design	Ring sensor, Q14
Dimensions	62.5 x 30 x 14 mm
Housing material	Plastic, PBT-GF30-V0
Electrical connection	Connector, M12 × 1
Coil body	plastic, POM

Technical data

Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP67
MTTF	2283 years acc. to SN 29500 (Ed. 99) 40 °C
Power-on indication	LED, Green
Switching state	LED, Yellow

Mounting instructions

Mounting instructions/Description

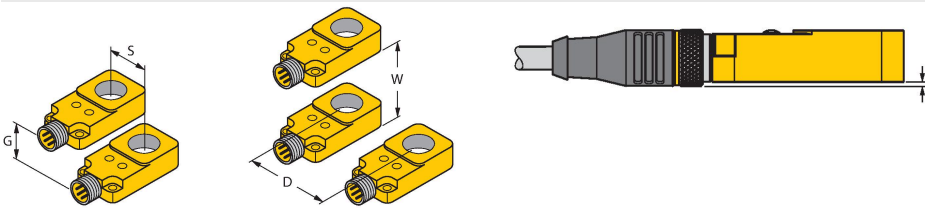

Distance D	45 mm
Distance W	45 mm
Distance S	14 mm
Distance G	30 mm

When mounting the sensor with an M12 connector, observe a low horizontal offset to the surface. This may vary depending on the choice of the connector.

Wiring accessories

Dimension drawing



Type

RKC4T-2/TEL

Ident. no.

6625010

Connection cable, female M12, straight, 3-pin, cable length: 2 m, sheath material: PVC, black; cULus approval; other cable lengths and qualities available, see www.turck.com

BI6R-Q14-AP6X2-H1141 | 12/03/2020 03-13 | technical changes reserved