




WIRING DIAGRAM		LOCKNUT LN-M12		SPECIFICATIONS																			
<p>OUTPUT: AP6X</p>		<p>M12x1</p> <p>.768 19.5</p> <p>.669 17.0</p> <p>.157 4.0</p>		<table><tr><td>RATED OPERATING DISTANCE</td><td>2mm =.079"</td></tr><tr><td>MOUNTING MODE</td><td>FLUSH</td></tr><tr><td>MIN. REPEAT ACCURACY</td><td>≤ 2%</td></tr><tr><td>TEMPERATURE DRIFT</td><td>≤ ±10%</td></tr><tr><td>HYSTERESIS</td><td>3–15%</td></tr><tr><td>OPERATING TEMPERATURE</td><td>–25°C to +70°C (–13°F to +158°F)</td></tr><tr><td>RATED OPERATIONAL VOLTAGE</td><td>10–30 VDC</td></tr><tr><td>RESIDUAL RIPPLE</td><td>≤10%</td></tr><tr><td>RATED OPERATIONAL CURRENT</td><td>≤ 200 mA</td></tr></table>		RATED OPERATING DISTANCE	2mm =.079"	MOUNTING MODE	FLUSH	MIN. REPEAT ACCURACY	≤ 2%	TEMPERATURE DRIFT	≤ ±10%	HYSTERESIS	3–15%	OPERATING TEMPERATURE	–25°C to +70°C (–13°F to +158°F)	RATED OPERATIONAL VOLTAGE	10–30 VDC	RESIDUAL RIPPLE	≤10%	RATED OPERATIONAL CURRENT	≤ 200 mA
RATED OPERATING DISTANCE	2mm =.079"																						
MOUNTING MODE	FLUSH																						
MIN. REPEAT ACCURACY	≤ 2%																						
TEMPERATURE DRIFT	≤ ±10%																						
HYSTERESIS	3–15%																						
OPERATING TEMPERATURE	–25°C to +70°C (–13°F to +158°F)																						
RATED OPERATIONAL VOLTAGE	10–30 VDC																						
RESIDUAL RIPPLE	≤10%																						
RATED OPERATIONAL CURRENT	≤ 200 mA																						
SHORT-CIRCUIT AND OVERLOAD PROTECTED																							

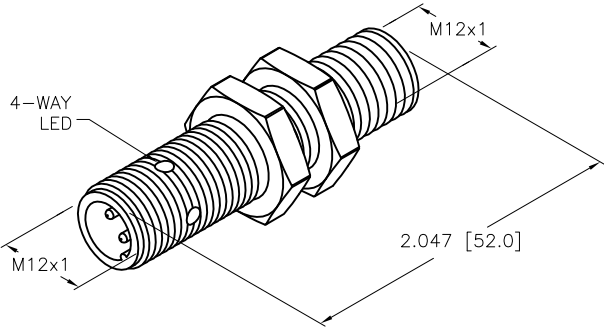

SOURCE DRAWING - FOR REFERENCE ONLY

<div>RELATED DOCUMENTS</div> <div>1. 2. 3. 4.</div>					<div>3RD ANGLE PROJECTION</div> <div></div>		<div>THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</div>		<div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</div> <div></div>			
					<div>MATERIAL</div> <div>FINISH</div>		<div>ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY</div> <div>CONTACT TURCK FOR MORE INFORMATION</div>		<div>DRFT GMB</div> <div>DATE 4/4/89</div>		<div>DESCRIPTION</div> <div>BI2-G12-AP6X-H1141</div>	
									<div>APVD</div> <div>SCALE 1 = 1.0</div>			
									<div>UNIT OF MEASUREMENT</div> <div>INCH [MILLIMETER]</div> <div>DO NOT SCALE THIS DRAWING</div>			
<div>E UPDATE ID NUMBER PER HARMONIZATION PROJECT CBM 01/30/18</div>					<div>IDENTIFICATION NO.</div> <div>4606595</div>		<div>REV</div> <div>E</div>					
<div>REV DESCRIPTION BY DATE ECO NO.</div>									<div>FILE: 4606595</div>		<div>SHEET 1 OF 1</div>	