



Ultrasonic Sensor Diffuse Mode Sensor RU50U-S18-AP8X



- Smooth sonic transducer face
- Cylindrical housing S18, potted
- Connection via cable, 2 m
- Teach range adjustable via adapter
- Temperature compensation
- Blind zone: 5 cm
- Range: 50 cm
- Aperture angle of sonic cone: 20°
- PNP switching output, NO contact
- Switching range adjustable

Wiring Diagram




Functional principle

Ultrasonic sensors capture a multitude of objects contactlessly and wear-free with ultrasonic waves. It does not matter whether the object is transparent or opaque, metallic or non-metallic, firm, liquid or powdery. Even environmental conditions such as spray, dust or rain hardly affect their function.

The sonic cone diagram indicates the detection range of the sensor. In accordance with standard EN 60947-5-2, quadratic targets in a range of sizes (20 x 20 mm, 100 x 100 mm) and a round rod with a diameter of 27 mm are used.


Important: The detection ranges for other targets may differ from those for standard targets due to the different reflection properties and geometries.

Sonic Cone

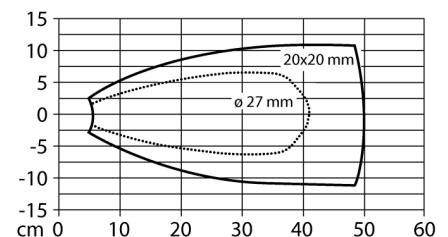

Type designation	RU50U-S18-AP8X
Ident-No.	100000394
Function	Ultrasonic diffuse mode sensor
Range	50...500 mm
Resolution	0.2 mm
minimum measuring range	50 mm
minimum switching range	5 mm
Ultrasound frequency	300 kHz
Repeat accuracy	0.15 % of full scale
Temperature drift	1.5% of full scale
Linearity error	≤ ± 0.5 %
Edge lengths of the nominal actuator	20 mm
Approach speed	≤ 5 m/s
Pass speed	≤ 3 m/s
Operating voltage	15...30 VDC
DC rated operational current	≤ 150 mA
No-load current I ₀	≤ 50 mA
Residual current	≤ 0.1 mA
Response time typical	65 ms
Readiness delay	300 ms
Output function	NO contact, PNP
Output 1	Switching output
Switching frequency	9.6 Hz
Hysteresis	≤ 5 mm
Voltage drop at I ₀	≤ 2.5 V
Short-circuit protection	yes/ Cyclic
Reverse polarity protection	yes
Wire breakage protection	yes
End cap	Plastic, EPTR, black
Design	Threaded barrel, S18
Radiation direction	straight
Dimensions	64 x Ø 18 mm
Housing material	Plastic, LCP, Yellow
Transducer material	Plastic, Epoxyd resin and PU foam
Electrical connection	Cable, 2 m, 4-wire
Protection class	IP67
Ambient temperature	-20...+50 °C
Storage temperature	-40...+80 °C
Declaration of conformity EN ISO/IEC	EN 60947-5-2
Vibration resistance	IEC 60068-2-6
MTTF	293 years
MTTF note	acc. to SN 29500 (Ed. 99) 40 °C
Switching state	LED, Yellow

Ultrasonic Sensor Diffuse Mode Sensor RU50U-S18-AP8X

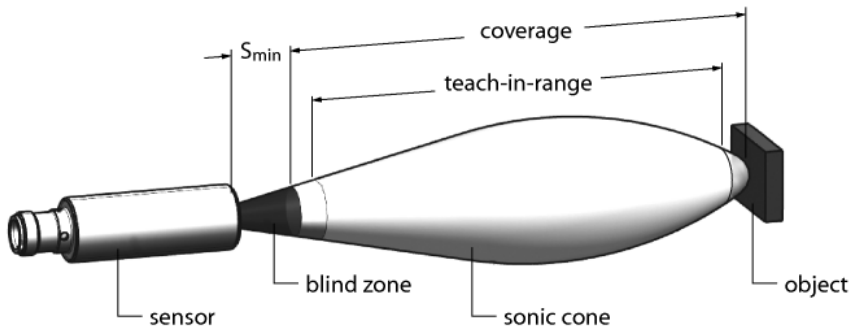

Setting the switching point

The ultrasonic sensor features a switching output with a teachable switching point. The yellow LED indicates whether the object is within the switching range of the sensor.

One switching point is taught. This must be within the detection range. In this operating mode the background is suppressed.

Simple Teach-In

Place object at the end of the switching range

Pin 2/seal the white core against Ub for 2...7 s

- Return to normal operating mode after 17 s or more.



After a successful teach-in, the yellow LED flashes 3 times and the sensor runs automatically in normal operating mode.

LED response

In normal operating mode, the LED signals the switching state of the sensor.

Ultrasonic Sensor
Diffuse Mode Sensor
RU50U-S18-AP8X

Accessories

Type code	Ident-No.	Description	Dimension drawing
BSS-18	6901320	Mounting clamp for smooth and threaded barrel sensors; material: Polypropylene	
MW-18	6945004	Mounting bracket for threaded barrel sensors; material: Stainless steel A2 1.4301 (AISI 304)	
VB2-SP1	A3501-29	Teach adapter	