


TW902-928-L96-24-M-B40-500PCS

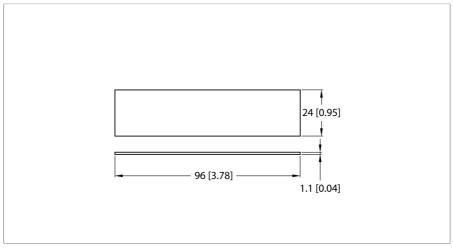

Type designation TW902-928-L96-24-M-B40-500PCS Ident-No. 100004168

Type TW902-928-L96-24-P-M-B40-500PCS Ident. no. 100004168

Data transfer Alternating electromagnetic field

Technology UHF (860...960 MHz) Usage region (UHF) FCC (902...928 MHz) Reading range 5 m (2W ERP) Reading range on metal 5 m (2W ERP) **EEPROM** Memory type

Chip Impinj Monza R6-P

Memory 40 Byte Memory Read/Write Freely usable memory 4 Byte **EPC** memory 16 byte Number of read operations unlimited Number of write operations 10⁵ Typical read time 2 ms/byte 3 ms/byte Typical write time Radio communication and protocol standards ISO 18000-63 EPCglobal Gen 2

Temperature of data carrier during read/write -40...+85 °C

access

Temperature of data carrier outside detection -40...+85 °C

range

Smart Label, Smart Label Design

Housing length 96 mm Housing width 24 mm Housing height 1.1 mm IP68 Protection class

Packaging unit

Remark to product Smart-Label, self-adhesive

Functional principle

The UHF read/write heads form an air interface the size of which may vary, depending on the combination of read/write head and data

The read/write distances mentioned here only represent standard values measured under laboratory conditions and free from any influences caused by materials.

Attainable distances may vary due to component tolerances, mounting conditions, ambient conditions and material qualities, especially when mounted in metal.

Testing of the application under real operating conditions is therefore essential, especially with read/write on-the-fly!





TW902-928-L96-24-M-B40-500PCS

Mounting instructions



General Information

When mounting the tags, only remove them from the roll immediately before affixing them. Remove any dirt from the surfaces to be bonded and allow to dry. Liquids, oils, greases and other substances can reduce the effectiveness of the adhesive. If possible, affix the tag at room temperature (20–25 $^{\circ}\text{C}$).

Defective tags are indicated by a black dot. Please do not use this tag. Upon delivery, the number of marked defective tags is added to the total number of Smart Labels delivered.