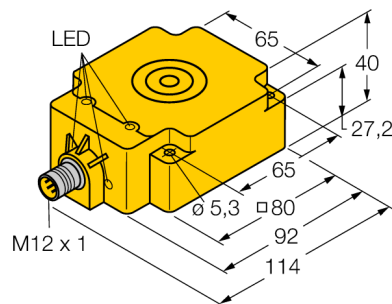







.../S2503 Connectors



Connector .../S2500



Connector .../S2501



Type designation	TNLR-Q80-H1147
Ident-No.	7030230
Electrical data	
Operating voltage	19.2...28.8 VDC
DC rated operational current	≤ 90 mA
inrush current	1100 mA For: 1 ms
Data transfer	Inductive coupling
Technology	HF (13.56 MHz)
Operating frequency	13.56 MHz
Radio communication and protocol standards	ISO 15693
Read/Write distance max.	215 mm
Output function	4-wire, Read/Write
Interface	Connection only via Turck system components
Mechanical data	
Mounting conditions	Non-flush, flush mountable
Ambient temperature	-25...+70 °C
Design	Rectangular, Q80
Dimensions	92x 80x 40mm
Housing material	Plastic, PBT-GF30-V0, Yellow
Active area material	Plastic
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
Protection class	IP67
Electrical connection	Connector
MTTF	248 years acc. to SN 29500 (Ed. 99) 40 °C
Power-on indication	LED, Green
Packaging unit	1

Functional principle

The HF read/write heads operating at a frequency of 13.56 MHz form a transmission zone the size of which (0...500 mm) varies, depending on the combination of read/write head and data carrier.




The read/write distances mentioned here only represent standard values measured under laboratory conditions.

The read/write distances of the data carriers for mounting in metal TW-R**-M(MF) were determined in metal.





Attainable distances may vary by up to 30 % due to component tolerances, mounting conditions, ambient conditions and material qualities (especially when mounted in metal)

Testing of the application under real operating conditions is therefore essential, especially with read/write on-the-fly!


Data carrier

Dimensions	Type designation	Read-write distance		Transfer zone		Minimum distance between two read-write heads
	Ident - no.	Recommend-ed (mm)	max. [mm]	length max. [mm]	width offset max. [mm]	[mm]
	TW-R7.5-B128 7030231	20	41	60	30	240
	TW-R9.5-B128 7030252	22	45	66	33	240
	TW-R9.5-K2 7030558	34	70	76	38	240
	TW-R16-B128 6900501	50	85	90	45	240
	TW-R20-B128 6900502	50	88	92	47	240
	TW-R20-K2 6900505	40	75	84	42	240
	TW-R30-B128 6900503	60	115	116	58	240
	TW-R30-K2 6900506	60	98	104	52	240

Data carrier

Dimensions	Type designation	Read-write distance		Transfer zone		Minimum distance between two read-write heads
	Ident - no.	Recommend- ed (mm)	max. [mm]	length max. [mm]	width offset max. [mm]	[mm]
	TW-R50-B128 6900504	80	165	168	84	240
	TW-R50-K2 6900507	90	144	150	75	240
	TW-SPP18X1-B128 6901062	30	66	80	40	240
	TW-R50-M-B128 7030209	35	58	64	32	240
	TW-R50-M-K2 7030229	30	58	76	38	240
	TW-R80-M-B128 7030207	50	90	90	45	240
	TW-R80-M-K2 7030205	35	78	80	40	240
	TW-R4-22-B128 7030237	40	73	86	43	240

Data carrier

Dimensions	Type designation	Read-write distance		Transfer zone		Minimum distance between two read-write heads
	Ident - no.	Recommend- ed (mm)	max. [mm]	length max. [mm]	width offset max. [mm]	[mm]
	TW-L86-54-C-B128 6900479	120	215	214	107	240