

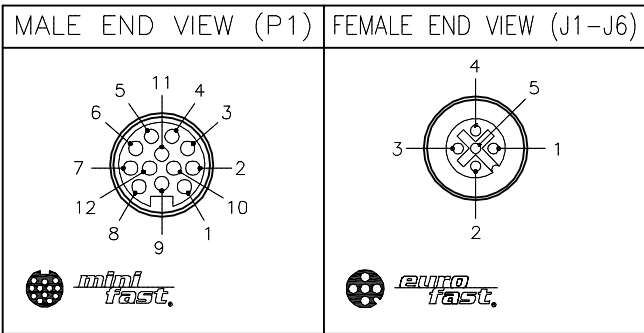
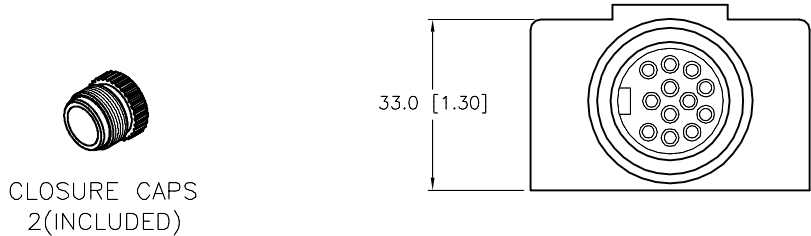
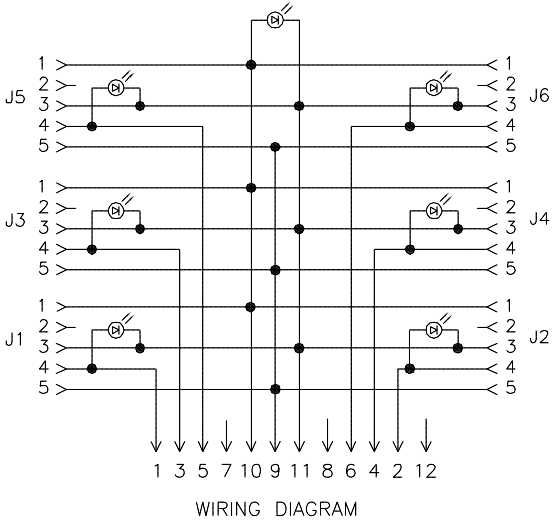


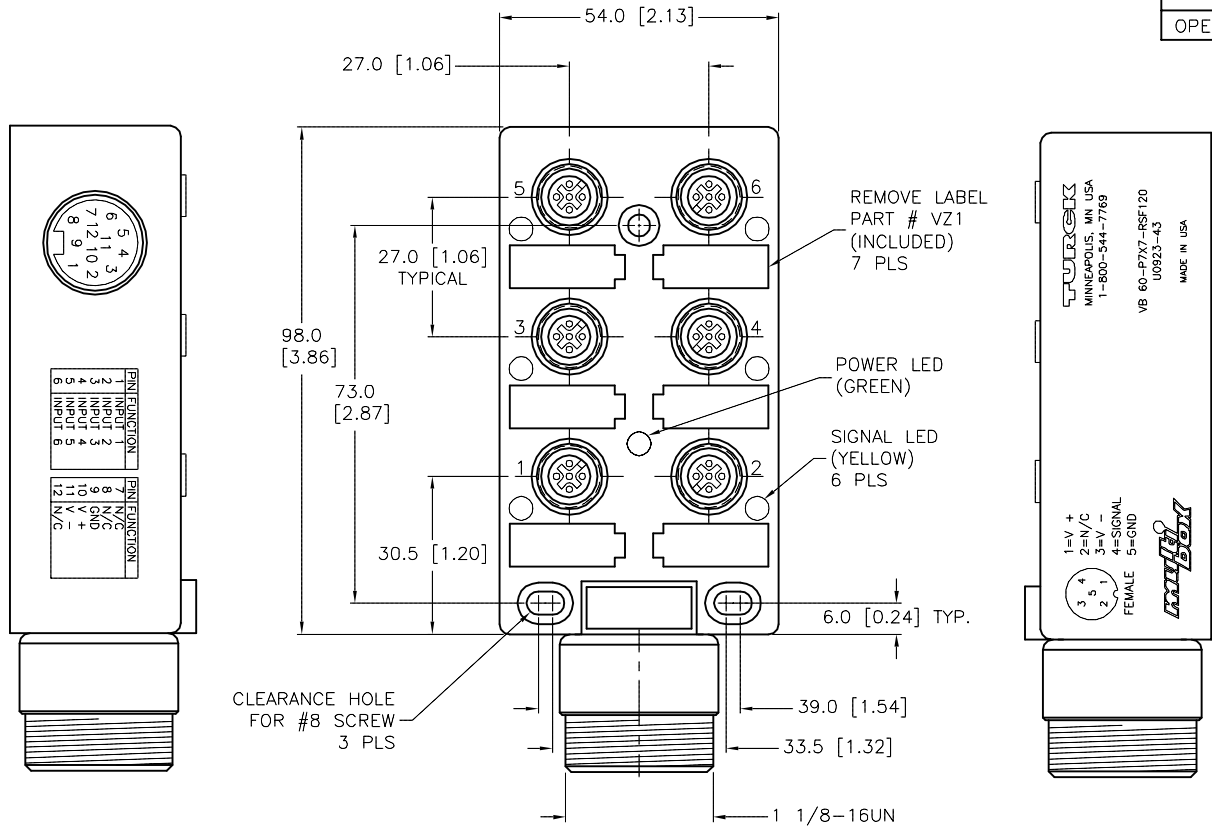

SPECIFICATIONS	
HOUSING/COLOR	NYLON/YELLOW
RECEPTACLE	NICKEL-PLATED BRASS
CONTACT CARRIERS/COLOR	NYLON/BLK (J1-J6), TPU/YEL (P1)
CONTACTS	GOLD-PLATED BRASS
SEALING RING	VITON O-RING
OPERATING VOLTAGE	10-48 VDC
OPERATING CURRENT	4 AMPS PER PORT, 9 AMPS TOTAL
LED FUNCTION	FOR PNP SENSOR OUTPUT
SPACINGS	to VDE 0110 GROUP C (EUROFAST)
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-30°C to +80°C (-25°F to +176°F)



SOURCE DRAWING - FOR REFERENCE ONLY

 CLOSURE CAPS 2(INCLUDED)					33.0 [1.30] 					RELATED DOCUMENTS 1. 2. 3. 4.		3RD ANGLE PROJECTION 		THIS DOCUMENT IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (612) 553-7300 (612) 553-0708 fax www.turck.com	
MATERIAL SEE SPECIFICATIONS					FINISH SEE SPECIFICATIONS		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION		DRFT PJ APVD PLJ		DATE 11/23/04 SCALE 1=1.5		DESCRIPTION VB 60-P7X7-RSF120				
UNIT OF MEASUREMENT MILLIMETER [INCH]					DO NOT SCALE THIS DRAWING					IDENTIFICATION NO. U0923-43			REV E				
REV DESCRIPTION					TV 09/14/15		48811		FILE: U0923-43			SHEET 1 OF 1					