


FW-ERKPM0526-SA-P-0408

Accessories for Sensors and Actuators – Field-Wireable Connector

Female Connector, M12 × 1, Straight

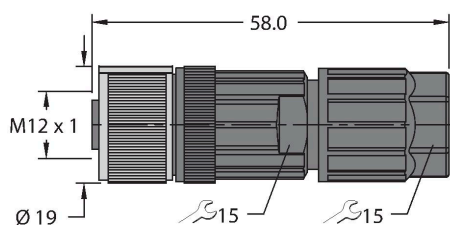


Features



- Push-in connection
- A-coding
- 5-pin
- Flammability class acc. to UL 94 V0
- Cable feedthrough: 4.0...8.0 mm
- Terminal capacity:
 - 0.14...0.75 mm² (without cable end sleeve)
 - 0.08...0.5 mm² (with cable end sleeve)
- Approval: cULus
- RoHS-compliant
- Protection class: IP65, IP67

Contact assignment



Pin Assignment

Technical data

Type	FW-ERKPM0526-SA-P-0408
ID no.	100002534
Connector A	Female, M12 × 1, Straight, A-code
Number of Pins	5
Contacts	Bronze, CuSn, Gold-plated
Contact carriers	Plastic, PA 6.6, Black
Connector body	Plastic, PA 6.6, Black
Coupling nut	Die-cast Zinc, GD-Zn, Nickel-plated
Connector seal	Plastic, NBR
Tightening torque (range)	0.4 ... 0.4 Nm (note max. torque of mating connector!)
Panel seal	plastic, NBR
External diameter of the cable	min. 4...8 mm
Core cross-section/Clamping ability	0.14...0.75 mm ²
Connection mode	Push-in connection
Mechanical life	> 100 Mating cycles
Protection class (When coupled)	IP65, IP67, (screwed together)
Shield	no
Electrical properties at +20 °C	
Rated voltage	60 V
Current	4 A

Technical data

Insulation resistance	$\geq 10^8 \Omega$
-----------------------	--------------------

Mechanical and chemical properties

Ambient temperature range (static)	-40 °C...+85 °C
------------------------------------	-----------------