

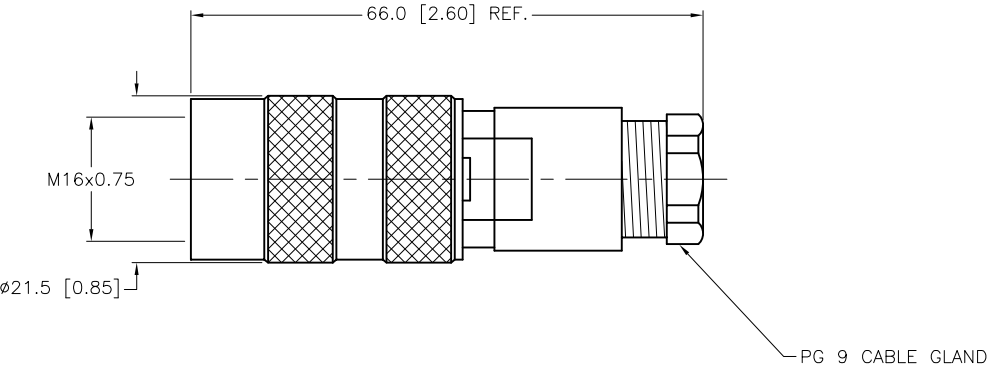


FEMALE END VIEW




 M16 connector

SPECIFICATIONS	
CONTACT CARRIER MATERIAL	NYLON
CONTACT MATERIAL/PLATING	COPPER ALLOY/GOLD
HOUSING MATERIAL	NYLON
COUPLING NUT MATERIAL	BRASS
RATED CURRENT [A]	6.0 A
RATED VOLTAGE [V]	60 V AC/DC
TEMPERATURE RANGE	-40°C to +85° C (-40°F to +185°F)
PROTECTION CLASS	MEETS IEC IP67
CABLE GLAND	PG 9 - ACCEPTS 6-8mm CABLE
TERMINATION TYPE	SOLDER CUP



NOTE  
PRELIMINARY  
SPECIFICATIONS

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS				3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		<div><b>TURCK INC</b> High Technology Sensors and Automation Controls</div> <div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com</div>			
1. 2. 3. 4.						DRFT RDS		DATE 07/08/11		DESCRIPTION BK 4-0	
MATERIAL  SEE SPECIFICATIONS				ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		APVD		SCALE 1=1.0			
FINISH  SEE SPECIFICATIONS				CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT <b>MILLIMETER [ INCH ]</b>		IDENTIFICATION NO. U2-02858		REV P2	
P2 DRAWING PROCESSED AS PART OF ECO 39020				KMY 06/07/12 39020		DO NOT SCALE THIS DRAWING		FILE: U2-02858		SHEET 1 OF 1	
REV DESCRIPTION				BY DATE ECO NO.							