


MALE END VIEW






- 1 = BROWN (+ VOLTAGE)
- 2 = N/C
- 3 = BLUE (- VOLTAGE)
- 4 = N/C




SPECIFICATIONS

CONTACT MATERIAL/PLATING	BRASS/GOLD
CONTACT CARRIER MATERIAL/COLOR	PLASTIC, TPU/BLACK
CABLE GRIP MATERIAL/COLOR	PLASTIC, PA/BLACK
COUPLING NUT MATERIAL/PLATING	DIECAST ZINC/NICKEL
SEAL MATERIAL	PLASTIC, NBR
SCREW-IN THREAD SEAL MATERIAL	PLASTIC, NBR
DEGREE OF PROTECTION	IP67
CABLE GRIP RANGE	ø6-8mm
SCREW-IN THREAD	PG 9
RATED VOLTAGE [V]	250 V MAX.
INSULATION RESISTANCE	$\geq 10^9 \Omega$
RATED CURRENT [A]	9.0 A
FORWARD RESISTANCE	$\leq 5 m\Omega$
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)

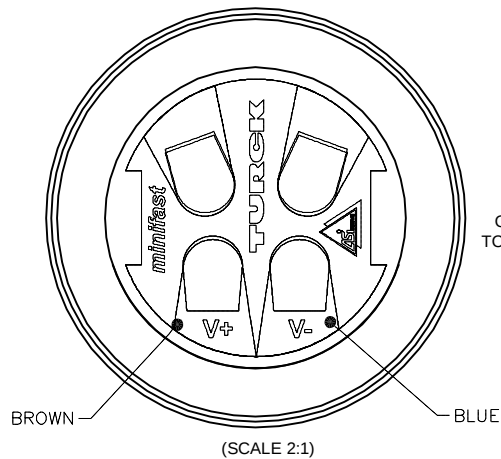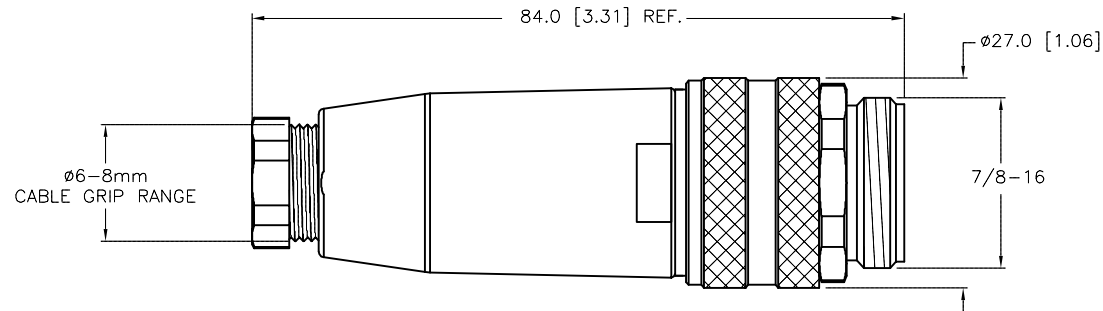

WIRE SIDE VIEW
OF CONTACT HOLDER
TO SHOW LABEL DETAILS

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK INC <i>High Technology Sensors and Automation Controls</i>		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1. 2. 3. 4.							
MATERIAL		DRFT RDS		DATE 05/16/08		DESCRIPTION BS 4140-0/9/ASI	
SEE SPECIFICATIONS		DSGN		SCALE 1=1.0			
FINISH		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO. U2-13618		REV B	
SEE SPECIFICATIONS							
DO NOT SCALE THIS DRAWING				FILE: U2-13618		SHEET 1 OF 1	

B	UPDATE GRAPHICS FOR COUPLING NUT, SEE ECO	RWC	05/10/10	300247
REV	DESCRIPTION	BY	DATE	ECO NO.