


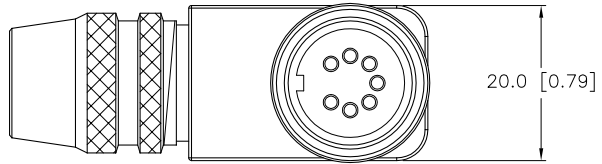


FEMALE END VIEW

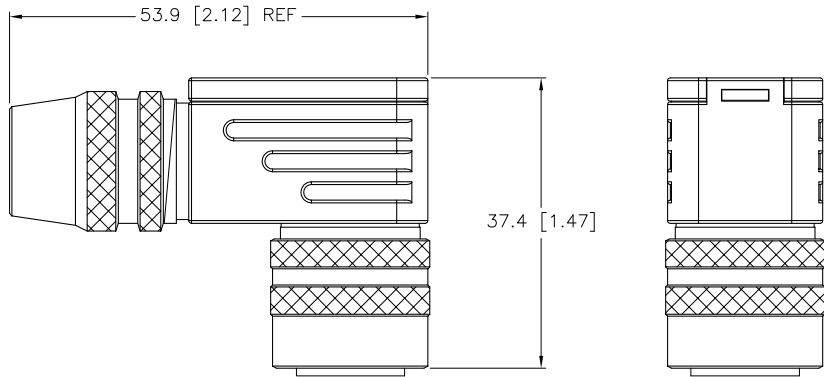

 M16 connector

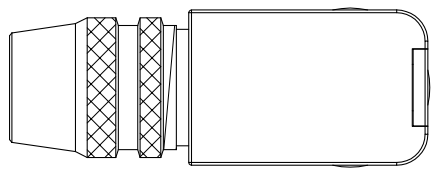

SPECIFICATIONS	
CONTACT CARRIER MATERIAL	PBT
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING MATERIAL/PLATING	ZINC DIECAST/NICKEL
COUPLING NUT MATERIAL/PLATING	ZINC DIECAST/NICKEL
RATED CURRENT [A]	5.0 A
RATED VOLTAGE [V]	125 VAC/VDC
TEMPERATURE RANGE	-30°C TO +95°C (-22°F TO +203°F)
PROTECTION CLASS	MEETS IEC IP67
CABLE GLAND	PG 9 – ACCEPTS 6–8mm CABLE
TERMINALS	CONDUCTORS TO 20 AWG, SOLDER CUP TERMINALS

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
1.			ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	DRFT	RWC	DATE	02/24/09
2.				DSGN		SCALE	1=1.0
3.				UNIT OF MEASUREMENT			
4.				MILLIMETER [INCH]			
MATERIAL		SEE SPECIFICATIONS		DESCRIPTION			
FINISH		SEE SPECIFICATIONS		IDENTIFICATION NO.			
		CONTACT TURCK FOR MORE INFORMATION		WBKS 7-0			
				DO NOT SCALE THIS DRAWING			
				FILE: U2-15423			
				SHEET 1 OF 1			