


WHT,TPV,12X24

Washdown Cable – Reelfast™ Bulk Cable

Features



- 300V
- Washdown Cable
- White TPV jacket, 12X24 AWG
- -40 Cold Bend Rating

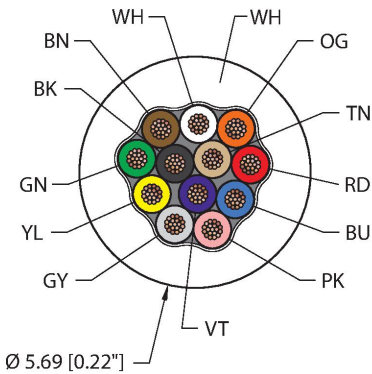

Technical data

Type	WHT,TPV,12X24
ID no.	RF51464
Cable data	
Cable Platform	Washdown Cable
Total number of conductors	12
Cable diameter	Ø 5.69 mm
Cable jacket	TPV, White
Conductor diameter	0.035 "
Conductor material	TC (tinned copper)
Conductor insulation material	TPC-ET
Conductor size	12 x 24 AWG [Similar to 0.25 mm²]
Number of strands x O.D.	19 x 36 AWG
Conductor colors	TN, VT, BK, BN, WH, OG, RD, BU, PK, GY, YL, GN
Weight	0.107 lbs. /meter
Electrical properties at +20 °C	
Voltage	300V
Dielectric withstand (min.)	0.5 KVAC
DC resistance (max)	25.67 Ω/1000ft max.
Mechanical and chemical properties	
Bending radius (static)	≥ 5 x Ø
Bending radius (dynamic)	≥ 10 x Ø
Cold bend rating	-40 °C
Ambient temperature range (static)	-40 °C...+105 °C

WHT,TPV,12X24 | 05/20/2021 15-25 | technical changes reserved

Technical data

Ambient temperature range (dynamic)	-40 °C...+105 °C
Temperature range (installation)	-20 °C...+105 °C
Approval	
Compliances	RoHS
Note	
	- Flex ratings may be reduced if used in extreme temperatures, exposure to certain chemicals, operating above the rated cycle speed, or operating below the rated cable bend radius.
	- We reserve the right to make technical alterations without prior notice.