



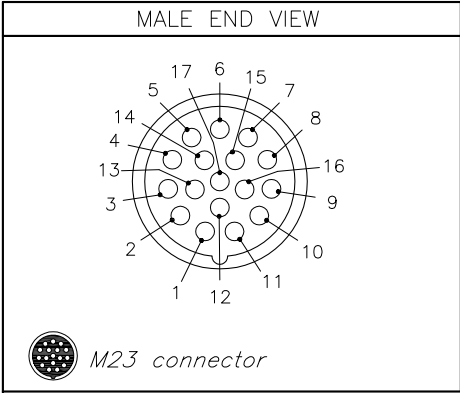

SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	PBT OR NYLON/GRAY
CONTACT MATERIAL/PLATING	CuZn/GOLD
COUPLING NUT MATERIAL/PLATING	CuZn/NICKEL
GASKET	PERBUNAN OR FLUOR RUBBER
RATED CURRENT [A]	8.0 A
RATED VOLTAGE [V]	150 V
MAX. CONDUCTORS SIZE	17 AWG MAX
TERMINATION METHOD	SOLDER
TEMPERATURE	−40°C to 125°C (−40°F to 257°F)
PROTECTION CLASS	IEC IP 65
CABLE DIAMETERS	5mm (.197") TO 10mm (.394")

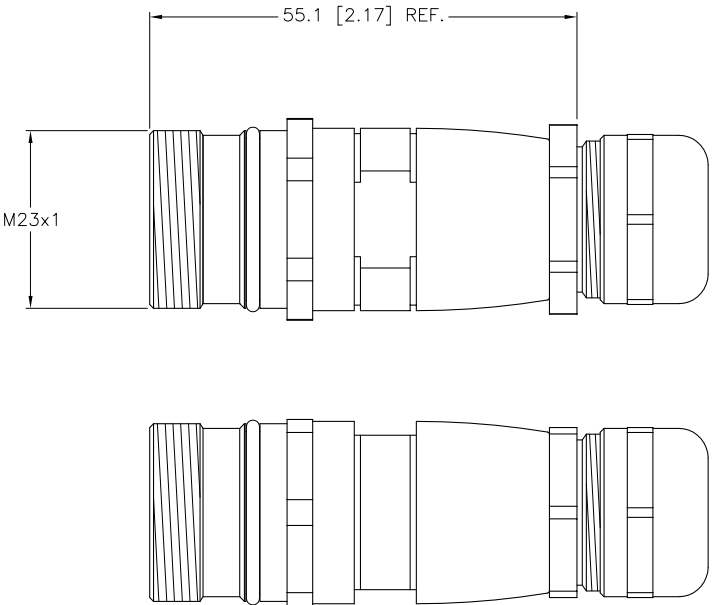

NOTES:

1. THE CABLE GLAND IS PG 13.5 CABLE GLAND.

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES: 1. THE CABLE GLAND IS PG 13.5 CABLE GLAND.					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED. TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com					
					1. 2. 3. 4.									
					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT RWC		DATE 06/08/09		DESCRIPTION CSS 17-0	
					FINISH				DSGN		SCALE 1=1.0			
					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT				IDENTIFICATION NO. U2-10278		REV A	
							MILLIMETER [INCH]							
							DO NOT SCALE THIS DRAWING				FILE: U2-10278		SHEET 1 OF 1	
A	DRAWING RELEASE			RWC	06/08/09	26577								
REV	DESCRIPTION			BY	DATE	ECO NO.								