


MALE END VIEW






- 1 = BLUE (- VOLTAGE)
- 2 = BROWN (+ VOLTAGE)
- 3 = BARE (SHIELD)
- 4 = GREEN/YELLOW (GROUND)



SPECIFICATIONS

CONTACT MATERIAL/PLATING	BRASS/GOLD
CONTACT CARRIER MATERIAL/COLOR	PLASTIC, TPU/BLACK
CABLE GRIP MATERIAL/COLOR	PLASTIC, PA/BLACK
COUPLING NUT MATERIAL/PLATING	DIECAST ZINC/NICKEL
SEAL MATERIAL	PLASTIC, NBR
SCREW-IN THREAD SEAL MATERIAL	PLASTIC, NBR
DEGREE OF PROTECTION	IP67
CABLE GRIP RANGE	ø6-8mm
SCREW-IN THREAD	PG 9
RATED VOLTAGE [V]	250 V MAX.
INSULATION RESISTANCE	≥ 10 ⁹ Ω
RATED CURRENT [A]	9.0 A
FORWARD RESISTANCE	≤ 5 mΩ
TEMPERATURE RATING	-40°C to +90°C (-40°F to +194°F)

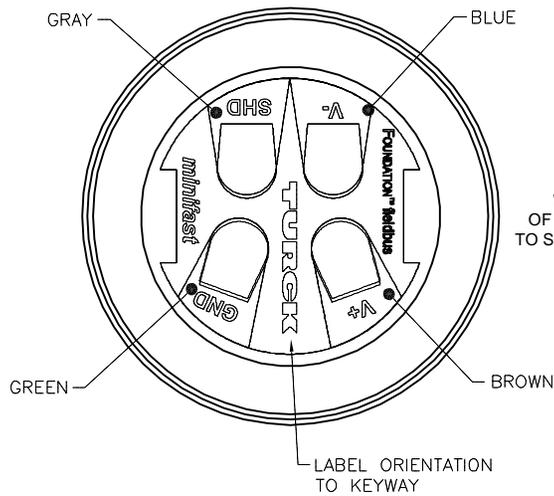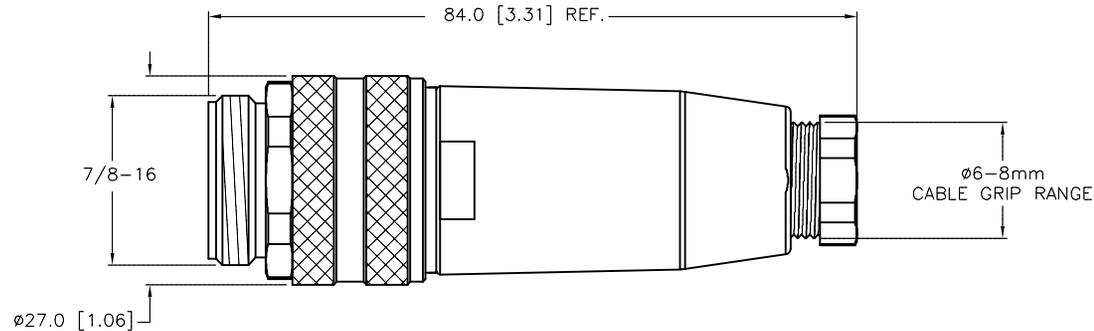

WIRE SIDE VIEW OF CONTACT HOLDER TO SHOW LABEL DETAILS

(SCALE 2:1)

NOTES:

1. "/C1265" DESIGNATES ADDING PART NUMBERS:

- 10163216 PINCH RING, PG9, 8.5MM
- 10163225 PRESSING SCREW, PG9, 8.5MM

TO BOM AND RE-PACKAGE.

SOURCE DRAWING - FOR REFERENCE ONLY

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION 	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		TURCK INC High Technology Sensors and Automation Controls 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com	
		DRFT	RDS	DATE	05/16/08
MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	APVD	SCALE	DESCRIPTION BS 4140-0/9/C1265/FF	
SEE SPECIFICATIONS		UNIT OF MEASUREMENT MILLIMETER [INCH]		IDENTIFICATION NO.	REV
FINISH	CONTACT TURCK FOR MORE INFORMATION	DO NOT SCALE THIS DRAWING		U2-13610	C
SEE SPECIFICATIONS	FILE: U2-13610		SHEET 1 OF 1		

C	UPDATE LABEL VIEW TO SHOW LABEL ORIENTATION TO KEYWAY	RDS	04/08/13	41853
REV	DESCRIPTION	BY	DATE	ECO NO.