


WHT,TPV,4X22,S-DF

Washdown Cable – Reelfast™ Bulk Cable

Features



- 300V
- Washdown Cable
- TPV,White, shielded, 4X22 AWG
- -40 Cold Bend Rating

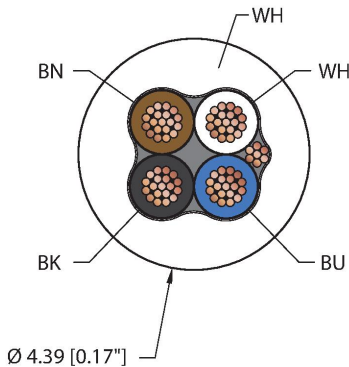

Technical data

Type	WHT,TPV,4X22,S-DF
ID no.	RF51358
Cable data	
Cable Platform	Washdown Cable
Total number of conductors	4
Cable diameter	Ø 4.39 mm
Cable jacket	TPV, White
Shield	Aluminum/polyester (IN)
Cable drain	24 AWG, TC (Tinned Copper)
Conductor diameter	0.039 "
Conductor material	TC (tinned copper)
Conductor insulation material	TPC-ET
Conductor size	4 x 22 AWG [Similar to 0.34 mm²]
Number of strands x O.D.	19 x 0.0058 "
Conductor colors	BN, WH, BU, BK
Weight	0.065 lbs. /meter
Electrical properties at +20 °C	
Voltage	300V
Dielectric withstand (min.)	0.5 KVAC
DC resistance (max)	17.5 Ω/1000ft max.
Mechanical and chemical properties	
Bending radius (static)	≥ 5 x Ø
Bending radius (dynamic)	≥ 15 x Ø

WHT,TPV,4X22,S-DF | 05/20/2021 15:24 | technical changes reserved

Technical data

Cold bend rating	-40 °C
Ambient temperature range (static)	-40 °C...+105 °C
Ambient temperature range (dynamic)	-40 °C...+105 °C
Temperature range (installation)	-20 °C...+105 °C
Approval	
Compliances	RoHS
Note	
- Flex ratings may be reduced if used in extreme temperatures, exposure to certain chemicals, operating above the rated cycle speed, or operating below the rated cable bend radius.	
- We reserve the right to make technical alterations without prior notice.	