
MALE END VIEW
4 2 5 1
mini iast.

SPECIFICATIONS					
HOUSING MATERIAL/COLOR GLASS FILLED NYLON/BLACK					
	,				
CONTACT MATERIAL/PLATING	BRASS/GOLD				
COUPLING NUT MATERIAL	STAINLESS STEEL				
RATED CURRENT [A]	9.0 A				
RATED VOLTAGE [V]	600 V				
MAXIMUM WIRE SIZE	16 AWG				
TERMINATION METHOD	SCREW TERMINAL				
TEMPERATURE RATING	-40°C to +85°C (-40°F to +185°F)				
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP 67				
CABLE GRIP RANGE	10-12mm DIA.				

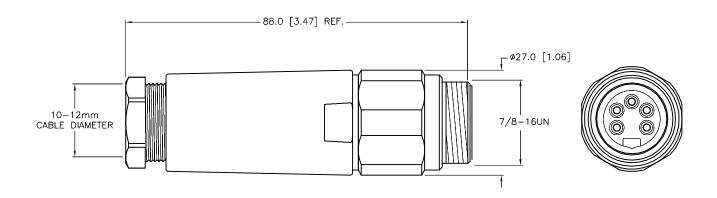

## SOURCE DRAWING - FOR REFERENCE ONLY

	RELATED DOCUMENTS	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE	141111E45	CAMPUS DRIVE
	2. 3. 4.	⊕ ←	DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.	ogy Sensors and Automation Controls  1-80 (76: (76:	00-544-7769 3) 553-7300 3) 553-0708 fax turck.com
	MATERIAL SEE SPECIFICATIONS	DISPLAYED ON THIS	DRFT RDS DATE 04/17/ APVD T.S. SCALE 1=1.0	BSV 4151-0/13.5	
	FINISH	DRAWING ARE FOR REFERENCE ONLY  CONTACT TURCK	UNIT OF MEASUREMENT  MILLIMETER [ INCH ]	IDENTIFICATION NO.	REV
B UPDATE RATED VOLTAGE RDS 05/12,	/14 45608 SEE SPECIFCATIONS	FOR MORE INFORMATION		U2-20063	B
EV DESCRIPTION BY DATE	ECO NO.		DO NOT SCALE THIS DRAWING	FILE: U2-20063	SHEET 1 OF 1