
MALE END VIEW
GROUND CONNECTED TO HOUSING

SPECIFICATIONS								
CONTACT CARRIER MATERIAL	NYLON							
CONTACT MATERIAL/PLATING	BRASS/GOLD							
HOUSING MATERIAL/PLATING	BRASS/NICKEL							
RATED CURRENT [A]	24 A (1-4), 8 A (A-D)							
RATED VOLTAGE [V]	600 V							
CONDUCTOR SIZE [AWG]	4x12 AWG, 4x18 AWG							
TEMPERATURE RANGE	-40°C to +105°C (-40°F to +221°F)							
PROTECTION CLASS	IEC IP67							



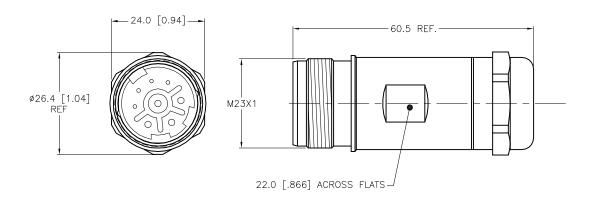

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES: 1. THIS IS A FIELD WIREABLE CONNECTOR. ASSEMBLY REQUIRED BY END USER.				RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION	THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.			3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us	
				MATERIAL	ALL DIMENSIONS	DRFT RDS	DATE 04/13/12	DESCRIPTION	CSS 82-0	
			SEE SPECIFICATIONS	DISPLAYED ON THIS DRAWING ARE FOR	A.A.	1=1.0	_			
				FINISH	REFERENCE ONLY	UNIT OF MEASUREMENT		IDENTIFICATION NO.		REV
					CONTACT TURCK FOR MORE	MILLIMET	ER [INCH]		U2-04275	l B
В	ADD NOTE	TR 12/06/	/19 75472	SEE SPECIFICATIONS	INFORMATION					
I DEV	DESCRIPTION	D NTE	ECO NO		I	I DO NOT SCAL	E THIS DRAWING	EILE: 112 04275		SHEET 1 OF 1