



SPECIFICATIONS	
CONTACT CARRIER MATERIAL/COLOR	NYLON OR TPU/YELLOW
MOLDED HEAD MATERIAL/COLOR	TPU/YELLOW
CONTACT MATERIAL/PLATING	BRASS/GOLD
COUPLING NUT MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	9.0 A
RATED VOLTAGE [V]	600 V
OUTER JACKET MATERIAL/COLOR	TPU/YELLOW
CONDUCTOR INSULATION MATERIAL	PVC
NUMBER OF CONDUCTORS [AWG]	5x18 AWG
TEMPERATURE RANGE	-40°C to +90°C (-40°F to +194°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67

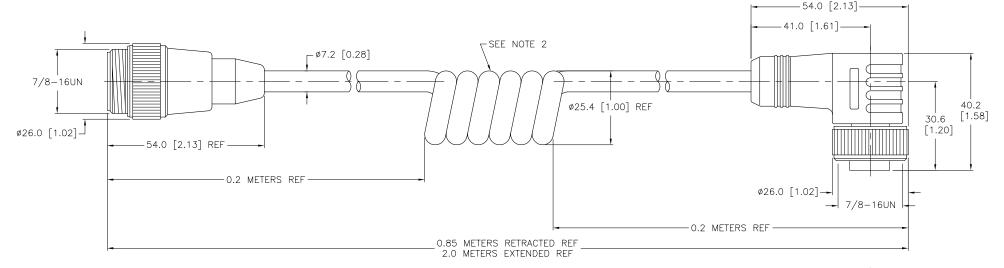



## SOURCE DRAWING - FOR REFERENCE ONLY

## RELATED DOCUMENTS 3RD ANGLE PROJECTION THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS 3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 turck inc 2. (763) 553-7300 DOCUMENT WITHOUT WRITTEN PERMISSION IS NOTES: High Technology Sensors and Automation Controls 3. (763) 553-0708 fax PROHIBITED. turck.com 1. "/S90" DESIGNATES THERMOPLASTIC POLYURETHANE (TPU) CABLE. MATERIAL DATE 02/23/07 RWC RSM WKM 50-2M/S90-SP 2. NUMBER OF COILS IS REFERENCE ONLY. ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR DSGN SCALE 1 = 1.3SEE SPECIFICATIONS UNIT OF MEASUREMENT REFERENCE ONLY IDENTIFICATION NO. REV FINISH MILLIMETER [ INCH ] CONTACT TURCK FOR MORE U2-03936 UPDATE VOLTAGE 07/29/1 35592 SEE SPECIFICATIONS INFORMATION DESCRIPTION DATE ECO NO. FILE: U2-03936 SHEET 1 OF 1 DO NOT SCALE THIS DRAWING