

MALE END VIEW


mini fast.

LOCKNUT

ø28.6 [1.13] REF.

1/2" THREAD

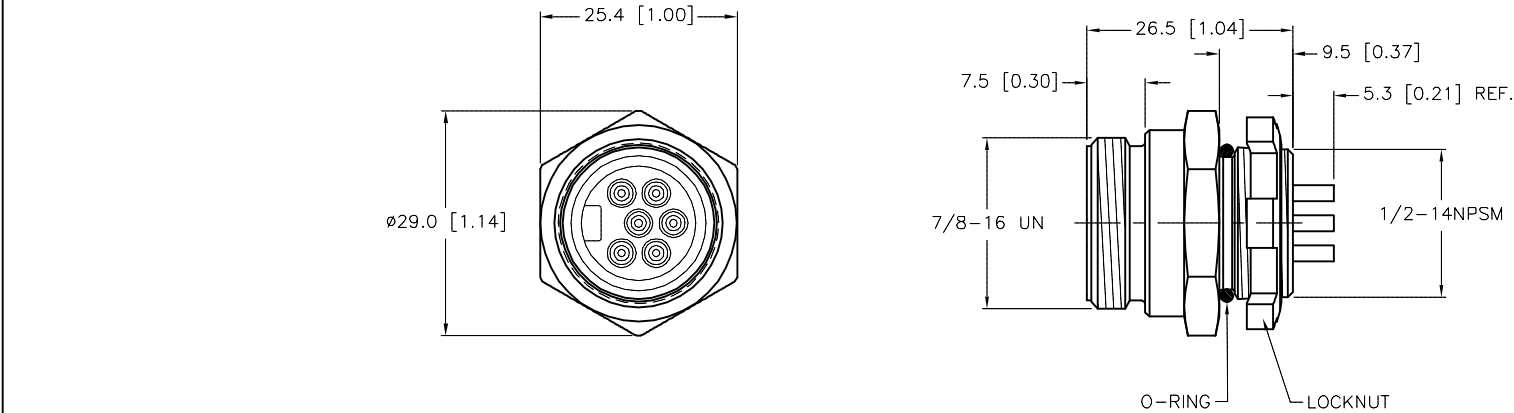

SPECIFICATIONS	
CONTACT CARRIER MATERIAL	TPU
CONTACT MATERIAL/PLATING	BRASS/GOLD
HOUSING MATERIAL/PLATING	BRASS/NICKEL
RATED CURRENT [A]	9.0 A
RATED VOLTAGE [V]	600 V
SOLDER CUP [MAX]	UP TO 16 AWG
TEMPERATURE RATING	-30°C to +80°C (-22°F to +176°F)
PROTECTION CLASS	MEETS NEMA 1,3,4,6P AND IEC IP67



NOTES:

1. "W/LN" DESIGNATES LOCKNUT INCLUDED WITH RECEPTACLE.

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES: 1. "W/LN" DESIGNATES LOCKNUT INCLUDED WITH RECEPTACLE.					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us					
																
A					DRAWING RELEASE		RDS		12/16/13		DESCRIPTION RSFL 66 W/LN					
					REV		DESCRIPTION		BY				DATE		ECO NO.	
SEE SPECIFICATIONS					FINISH		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY		DRFT		RDS		DATE 11/13/13		DESCRIPTION	
					SEE SPECIFICATIONS				APVD		T.S.		SCALE 1=1.0		IDENTIFICATION NO.	
SEE SPECIFICATIONS					CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT MILLIMETER [INCH]		DO NOT SCALE THIS DRAWING		FILE: U2-22237		SHEET 1 OF 1			
											A					