
excom® I/O System
Output Module, Analog, HART®, 4-channel
AOH40-N



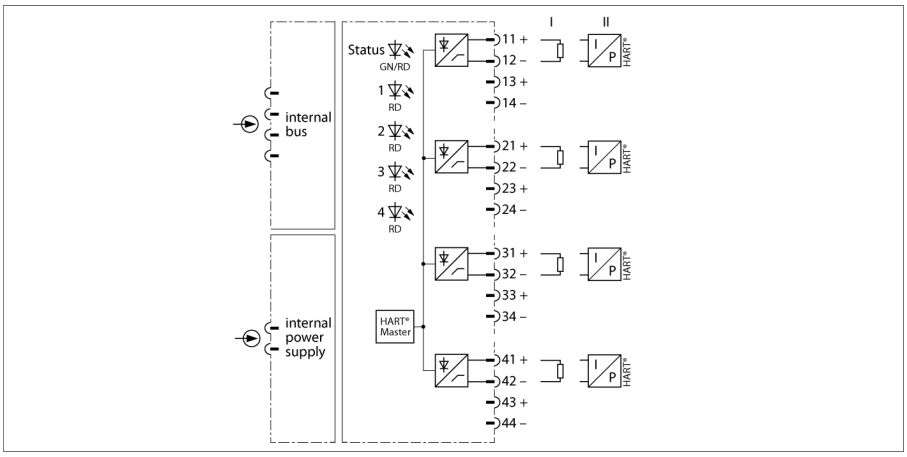

The output module AOH40-N is used for the connection of analog actuators such as control valves or process indicators.

The outputs are not galvanically isolated from each other. When connecting the field devices, care has to be taken that all outputs are on the same potential.

HART® compatible actuators connected to the module communicate directly with the HART® controller.

The resolution is 13 bit, i.e. the analog value of 0…21 mA is represented as a number between 0 and 8191. For easier operation, the host system operates in a value range between 0…21000. This raw value is reduced by the AOH40-N to a 13-bit resolution.

Parameters such as line monitoring, substitute values etc. can be adjusted for each channel separately and are initialized solely by the master.


- **Output module for the connection of analog actuators**
- **Transmission of HART® data**

Edition • 2020-01-31T11:57:04+01:00

excom® I/O System
Output Module, Analog, HART®, 4-channel
AOH40-N

Type designation	AOH40-N
Ident-No.	6884221
Supply voltage	via the backplanes, central power supply
Power consumption	≤ 3 W
Galvanic isolation	to int. bus and supply circuit
Number of channels	4-channel
Output circuits	0/4…20 mA
No-load voltage	16 VDC
HART® Impedance	> 240 Ω
External load	≤ 600 Ω
Short circuit	< 50 Ω (only in live zero mode)
Wire break	> 15 V (only in live zero mode)
Resolution	13 Bit
Linearity deviation	≤ 0.1 % full scale
Temperature drift	≤ 0.005 % of full scale/K
Rise time/fall time	≤ 50 ms (10…90 %)
Max. measurement tolerance under EMC influence	≤ 0.1 % with shielded signal cable ≤ 1 % with unshielded signal cable
Indication	
Operational readiness	1 x green / red
State/ Fault	4 x red
Housing material	Plastic
Connection mode	module, plugged on rack
Protection class	IP20
Ambient temperature	-20…+60 °C
Relative humidity	≤ 93 % at 40 °C acc. to EN 60068-2-78: test cab
Vibration test	acc. to IEC 60068-2-6
Shock test	acc. to IEC 60068-2-27
EMC	acc. EN 61326-1 (2013) acc. to Namur NE21 (2012)
MTTF	66 years acc. to SN 29500 (Ed. 99) 40 °C
Dimensions	18 x 118 x 106 mm

Dimensions



Edition • 2020-01-31T11:57:04+01:00

Hans Turck GmbH & Co.KG ● D-45472 Mülheim an der Ruhr ● Witzlebenstraße 7 ● Tel. 0208 4952-0 ● Fax 0208 4952-264 ● more@turck.com ● www.turck.com