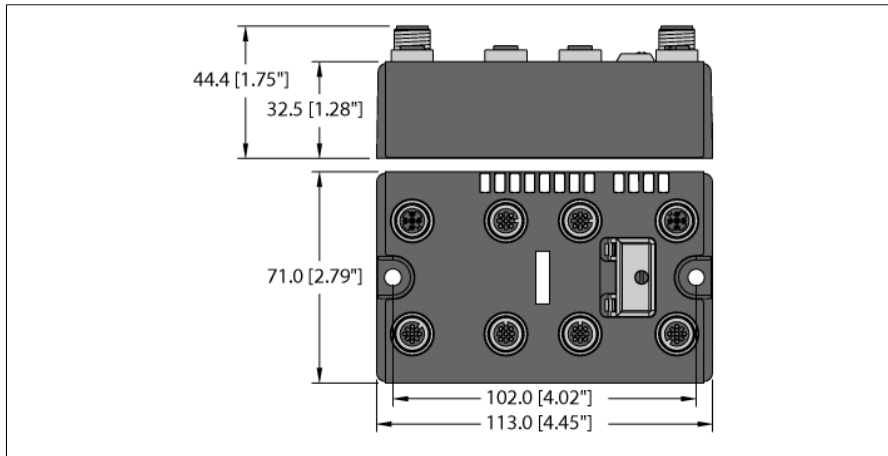


BL compact™ fieldbus station for CANopen

4 Digital PNP Outputs

BLCCO-4M12MT-4DO-2A-P



- On-machine Compact fieldbus I/O block
- CANopen slave
- 10, 20, 50, 125, 250, 500, 800, or 1000 kbps
- Two 5-pole M12 connectors for fieldbus connection
- 2 rotary switches for node address
- IP67, IP69K
- M12 I/O connectors
- LEDs indicating status and diagnostics
- Electronics galvanically separated from the field level via optocouplers
- 4 digital PNP outputs, 24 VDC
- Max. 2A per output (4A total)

Type designation	BLCCO-4M12MT-4DO-2A-P
Ident-No.	6811313

Nominal system voltage	24 VDC
System power supply	Via fieldbus and auxiliary power
Voltage supply connection	2 x M12, 4-pin
Nominal current V+	30 mA
Max. current V+	4 A
Admissible range Vo	11...30VDC
Nominal current Vo	100 mA
Max. current Vo	4 A

Fieldbus transmission rate	10 kbps ...1 Mbps
Adjustment transmission rate	Automatic detection
Fieldbus address range	1...99
Fieldbus addressing	2 decimally coded rotary switches
Fieldbus connection technology	2 x M12
	5-pole
Fieldbus termination	external
Service interface	RS232 interface







Digital outputs	PNP
Output type	Channel diagnostics
Type of output diagnostics	24 VDC
Sensor supply (V _{SENS})	2 A
Output current per channel	24 VDC
Output voltage	3 ms
Output delay	resistive, inductive, lamp load
Load type	> 12 Ω
Load resistance, resistive	< 1.2 H
Load resistance, inductive	< 10 W
Lamp load	< 200 Hz
Switching frequency, resistive	< 2 Hz
Switching frequency, inductive	< 20 Hz
Switching frequency, lamp load	yes
Short-circuit protection	

BL compact™ fieldbus station for CANopen
4 Digital PNP Outputs
BLCCO-4M12MT-4DO-2A-P

Dimensions	113 x 71 x 32.5 mm
Mounting	2 × 5.4 mm diameter holes, 1.7 Nm torque
Weight	390 ± 20 g
Housing material	Glass-filled nylon, nickel plated brass connectors
Housing color	Black
Window material	Lexan
Material screw	Nickel-plated brass
Material label	Polyester with polycarbonate overlay
Ground label material	Nickel plated brass
Protection class	IP67 IP69K
Operating temperature	-40...+70 °C
Storage temperature	-40...+85 °C
Relative humidity	15 to 95% (non-condensing)
Vibration test	according to IEC 61131-2
Extended vibration resistance - up to 20 g (at 10 up to 150 Hz)	For mounting on base plate or machinery
Shock test	according to IEC 61131-2
Electromagnetic compatibility	according to IEC 61131-2
Approvals and certificates	CE, cULus

BL compact™ fieldbus station for CANopen
4 Digital PNP Outputs
BLCCO-4M12MT-4DO-2A-P

Pinning and wiring diagram

	CANopen Fieldbus cable (example): RSC RKC 572-2M ident-no. U0323 or RSC-RKC572-2M ident-no. 6603629	Pin Assignment  
	Digital Outputs Extension cable (example): RK 4T-2-RS 4T ident-no. U2151-3 or RKC4T-2-RSC4T/TEL ident-no. 6625204	Pin Assignment  Wiring Diagram 
	Auxiliary Power Extension cable (example): RKC 4.4T-2-RSC 4.4T ident-no. U5264 or RKC4.4T-2-RSC4.4T/TEL ident-no. 6625208	Pin Assignment  

BL compact™ fieldbus station for CANopen
4 Digital PNP Outputs
BLCCO-4M12MT-4DO-2A-P

Station LED status

LED	Color	Status	Description
IOs		OFF	No power
	RED	ON	Low power or station error
	RED	FLASHING (1 Hz)	I/O module configuration error
	RED	FLASHING (4 Hz)	No I/O module bus communication
	GREEN	ON	Station ok
	GREEN	FLASHING	Force mode active
ERR	-	OFF	No communication error
	RED	ON	CAN bus communication error
BUS	GREEN	ON	NMT-slave state is „Operational“
	ORANGE	ON	NMT-slave state is „Pre-Operational“
	RED	ON	NMT-slave state is „Stopped“
ERR & BUS	RED (ERR) & GREEN (BUS)	FLASHING (4 Hz)	Searching for the baud rate

I/O LED status

LED	Color	Status	Description
D *		OFF	No diagnostics active
	RED	ON	Station error/ module bus communication failure
	RED	FLASHING (0.5Hz)	Diagnostics active
DO channels 0...3		OFF	Status of channel x = „0“ (OFF), no diagnostics active
	GREEN	ON	Status of channel x = „1“ (ON)
	RED	ON	Short circuit / overload on channel x

* D LED also indicates gateway diagnostics

BL compact™ fieldbus station for CANopen
4 Digital PNP Outputs
BLCCO-4M12MT-4DO-2A-P

I/O Data Map

OUTPUT	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	-	-	-	-	DO 1 ₃	DO 1 ₂	DO 1 ₁	DO 1 ₀
	1	-	-	-	-	-	-	-	-