


BL compact™ fieldbus station for PROFIBUS-DP

2 Analog Outputs for Current and 8 Configurable Digital PNP Channels

BLCDP-6M12LT-2AO-I-8XSG-PD

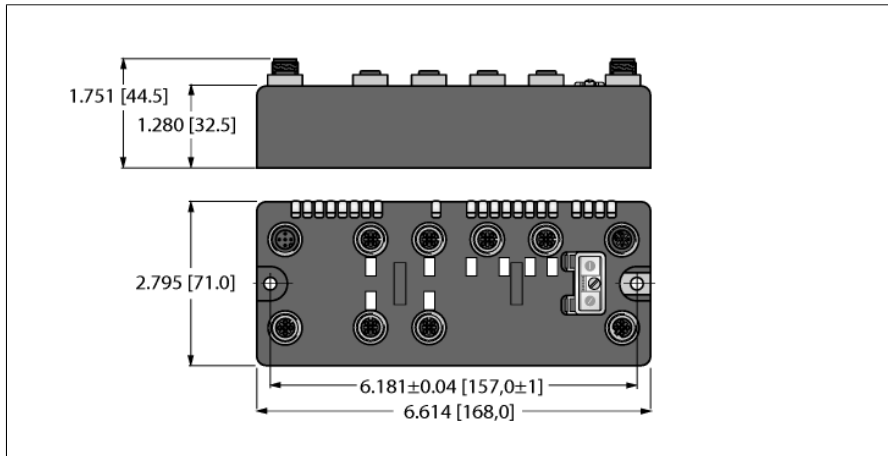

- On-machine Compact fieldbus I/O block
- PROFIBUS-DP slave
- 9.6 kbps ... 12 Mbps
- Two 5-pole M12, reverse-keyed, connectors for fieldbus connection
- 2 rotary switches for node address
- IP67, IP69K
- M12 I/O connectors
- LEDs indicating status and diagnostics
- Electronics galvanically separated from the field level via optocouplers
- 8 Configurable digital PNP channels, 24 VDC
- Max. 0.5A per channel
- Channel diagnostics
- Selection of filtering times (Input delay)
- Invertible inputs
- 2 analog current outputs
- 0/4...20 mA

Type designation	BLCDP-6M12LT-2AO-I-8XSG-PD
Ident-No.	6811171
Nominal system voltage	24 VDC
System power supply	Via auxiliary power
Voltage supply connection	2 x M12, 5-pin
Admissible range Vi	18...30VDC
Nominal current Vi	200 mA
Max. current Vi	2 A
Admissible range Vo	18...30VDC
Nominal current Vo	150 mA
Max. current Vo	4 A
Electrical isolation	The 8XSG I/O cards have a common reference potential for operating and load voltage due to their freely selectable digital channels. Subsequently, all voltage sources (VI / VO / V+) present on this device must be concurrently connected to suitable power supplies.
Fieldbus transmission rate	9.6 kbps ... 12 Mbps
Adjustment transmission rate	Automatic detection
Fieldbus address range	0...99
Fieldbus addressing	2 decimally coded rotary switches
Fieldbus connection technology	2 x M12
	5-pole, reverse keyed
Fieldbus termination	external
Service interface	RS232 interface
Digital inputs	From 8XSG
Input type	PNP
Type of input diagnostics	Channel diagnostics
Sensor supply (V _{SENS})	24 VDC, 100 mA short-circuit limiting
Low level signal voltage	4.5 V
Low level signal voltage	< 4.5 VDC
High level signal voltage	7...30 VDC
Low level signal current	< 1.5 mA
High level signal current	2.1...3.7 mA
Input delay	(configurable) 0.25 or 2.5 ms

BL compact™ fieldbus station for PROFIBUS-DP
2 Analog Outputs for Current and 8 Configurable Digital PNP Channels
BLCDP-6M12LT-2AO-I-8XSG-PD

Digital outputs	From 8XSG
Output type	PNP
Type of output diagnostics	Channel diagnostics
Sensor supply (V_{Sens})	24 VDC
Output current per channel	0.5 A
Output voltage	24 VDC
Output delay	3 ms
Load type	resistive, inductive, lamp load
Load resistance, resistive	> 48 Ω
Load resistance, inductive	< 1.2 H
Lamp load	< 3 W
Switching frequency, resistive	< 200 Hz
Switching frequency, inductive	< 2 Hz
Switching frequency, lamp load	< 20 Hz
Short-circuit protection	yes
Analog outputs	from 2AO-I
Operating modes	0/4 ... 20 mA
Type of output diagnostics	Channel diagnostics
Sensor supply	24 VDC, 250 mA per channel
Load resistance, resistive	< 0.45 k Ω
Load resistance, inductive	< 1 mH
Transmission frequency	< 200 Hz
Basic fault limit at 23 °C	< 0.2 %
Repeat accuracy	< 0.05 %
Temperature coefficient	< 150 ppm/°C of full scale
Resolution	16 bit
Measured-value display	16 bit signed integer 12 bit full range left-justified
Dimensions	168 x 71 x 32.5 mm
Mounting	2 x 5.4 mm diameter holes, 1.7 Nm torque
Weight	600 $\pm$ 20 g
Housing material	Glass-filled nylon, nickel plated brass connectors
Housing color	Black
Window material	Lexan
Material screw	Nickel-plated brass
Material label	Polyester with polycarbonate overlay
Ground label material	Nickel plated brass
Protection class	IP67 IP69K
Operating temperature	-40...+70 °C
Storage temperature	-40...+85 °C
Relative humidity	15 to 95% (non-condensing)
Vibration test	according to IEC 61131-2
Extended vibration resistance	
- up to 20 g (at 10 up to 150 Hz)	For mounting on base plate or machinery
Shock test	according to IEC 61131-2
Electromagnetic compatibility	according to IEC 61131-2
Approvals and certificates	CE, cULus

BL compact™ fieldbus station for PROFIBUS-DP

2 Analog Outputs for Current and 8 Configurable Digital PNP Channels

BLCDP-6M12LT-2AO-I-8XSG-PD

Pinning and wiring diagram

	PROFIBUS-DP Fieldbus cable (example): RSSW RKSX 455-2M ident-no. U0350 or RSSW-RKSX455-2M ident-no. 6602222	Pin Assignment (M12, B-Code)
	Slot 1: Analog Outputs Extension cable (example): RK 4.5T-2-RS 4.5T/S653 ident-no. U2187-09 or RKC4.5T-2-RSC4.5T/TEL ident-no. 6625212	Pin Assignment
	Slot 2: Digital Inputs and Outputs Extension cable (example): RK 4.4T-2-RS 4.4T ident-no. U2445 or RKC4.4T-2-RSC4.4T/TEL ident-no. 6625208	Pin Assignment
	Auxiliary Power Extension cable (example): RKC 4.4T-2-RSC 4.4T ident-no. U5264 or RKC4.4T-2-RSC4.4T/TEL ident-no. 6625208	Pin Assignment

BL compact™ fieldbus station for PROFIBUS-DP
2 Analog Outputs for Current and 8 Configurable Digital PNP Channels
BLCDP-6M12LT-2AO-I-8XSG-PD**Station LED status**

LED	Color	Status	Description
IOs		OFF	No power
	RED	ON	Low power or station error
	RED	FLASHING (1 Hz)	I/O module configuration error
	RED	FLASHING (4 Hz)	No I/O module bus communication
	GREEN	ON	Station ok
	GREEN	FLASHING	Force mode active
BUS		OFF	No field bus communication
	GREEN	ON	Field bus communication active
	GREEN	FLASHING (1 Hz)	No field bus communication active, device status OK
	RED	ON	Bus error at the gateway; no data exchange
	RED	FLASHING	Faulty PROFIBUS-DP address
BUS		OFF	No field bus communication
	GREEN	ON	Field bus communication active
	GREEN	FLASHING (1 Hz)	No field bus communication active, device status OK
	RED	ON	Bus error at the gateway; no data exchange
	RED	FLASHING	Faulty PROFIBUS-DP address

I/O LED status slot 1

LED	Color	Status	Description
D1 *		OFF	No diagnostics active
	RED	ON	Station error/ module bus communication failure
	RED	FLASHING (0.5Hz)	Diagnostics active (Slot 1)
AO channels 0 / 1			Not connected

* D1 LED also indicates gateway diagnostics

I/O LED status slot 2

LED	Color	Status	Description
D2 *		OFF	No diagnostics active
	RED	ON	Station error/ module bus communication failure
	RED	FLASHING (0.5Hz)	Diagnostics active (Slot 2)
XSG channels 0...7		OFF	Channel status x = "0" (OFF), no diagnostics active
	GREEN	ON	Channel status x = "1" (ON)
	RED	ON	Short-circuit at output
	RED	FLASHING (2 Hz)	Short-circuit sensor supply

* D2 LED also indicates gateway diagnostics

BL compact™ fieldbus station for PROFIBUS-DP
2 Analog Outputs for Current and 8 Configurable Digital PNP Channels
BLCDP-6M12LT-2AO-I-8XSG-PD

I/O Data Map

INPUT	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
	0	DI 2 ₇	DI 2 ₆	DI 2 ₅	DI 2 ₄	DI 2 ₃	DI 2 ₂	DI 2 ₁	DI 2 ₀
	1	-	-	-	-	-	-	-	-
OUTPUT	BYTE	Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
AO 1 ₀	0	AO 1 ₀ LSB							
	1	AO 1 ₀ MSB							
AO 1 ₁	2	AO 1 ₁ LSB							
	3	AO 1 ₁ MSB							
	4	DO 2 ₇	DO 2 ₆	DO 2 ₅	DO 2 ₄	DO 2 ₃	DO 2 ₂	DO 2 ₁	DO 2 ₀
	5	-	-	-	-	-	-	-	-