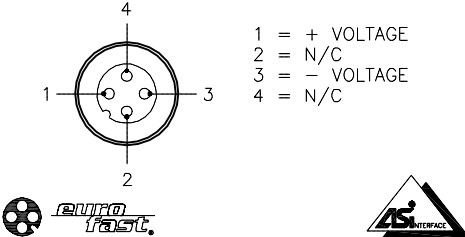
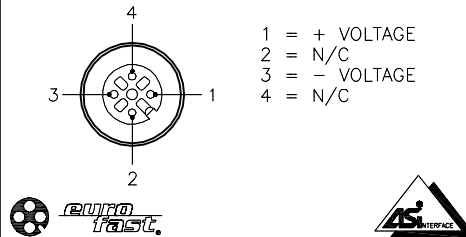
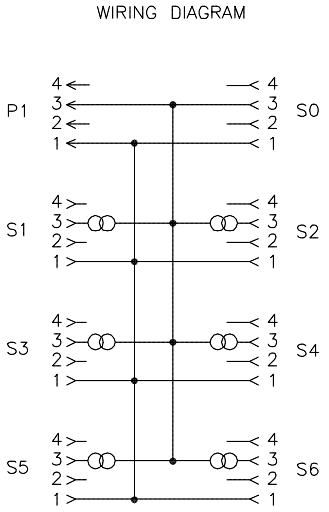
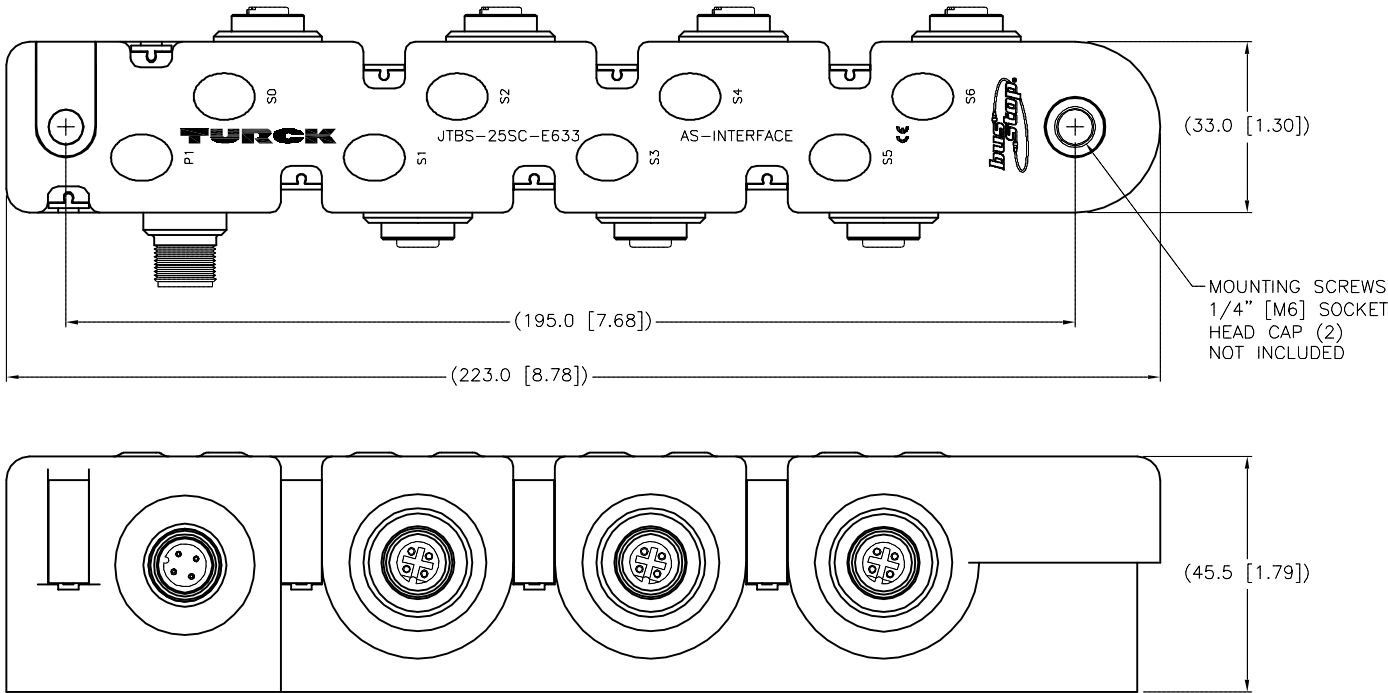




P1 CONNECTOR		S0-S6 CONNECTORS		SPECIFICATIONS	
				HOUSING MATERIAL/COLOR	TPU/BLACK
				RECEPTACLE HOUSING	STAINLESS STEEL, PASSIVATED
				CONTACT CARRIERS/COLOR	TPU/BLACK
				CONTACT MATERIAL/PLATING	BRASS/GOLD
				SHORT-CIRCUIT PROTECTION	280 mA
				OPEN CIRCUIT VOLTAGE	33 VDC
				CURRENT CONSUMPTION	11 mA
				PROTECTION CLASS	NEMA 1,3,4,6,13 AND IEC IP67
				OPERATING TEMPERATURE	-30°C to 80°C (-22°F to 176°F)
				LED INDICATION, GREEN	BUS POWER (P1,S0)
				LED INDICATION, RED	SHORT CIRCUIT INDICATION (S1-S6)



NOTES:

1. THIS DEVICE IS EQUIVALENT TO TWO (2) SLAVES ON THE NETWORK.

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES: 1. THIS DEVICE IS EQUIVALENT TO TWO (2) SLAVES ON THE NETWORK.					RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us				
					1. 2. 3. 4.										
					MATERIAL		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY								
					FINISH										
G		DRAWING PROCESSED AS PART OF ECO 33971		CBM	04/07/11	33971		DRFT		RDS	DATE	03/15/02	DESCRIPTION JTBS-25SC-E633		
REV		DESCRIPTION		BY	DATE	ECO NO.		APVD		GC	SCALE	1 = 1.5			
								CONTACT TURCK FOR MORE INFORMATION		UNIT OF MEASUREMENT			IDENTIFICATION NO.		REV
										MILLIMETER [INCH]			U8661-63		G
										DO NOT SCALE THIS DRAWING			FILE: U8661-63		SHEET 1 OF 1