


FEMALE END VIEW





- 1 = WHITE/ORANGE (+TX)
 2 = WHITE/GREEN (+RX)
 3 = ORANGE (-TX)
 4 = GREEN (-RX)



**auto
fast**

Ethernet

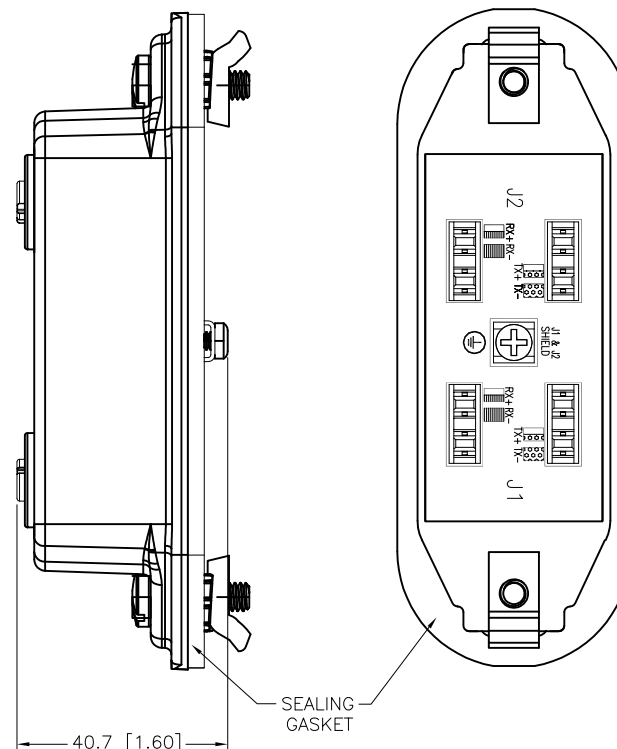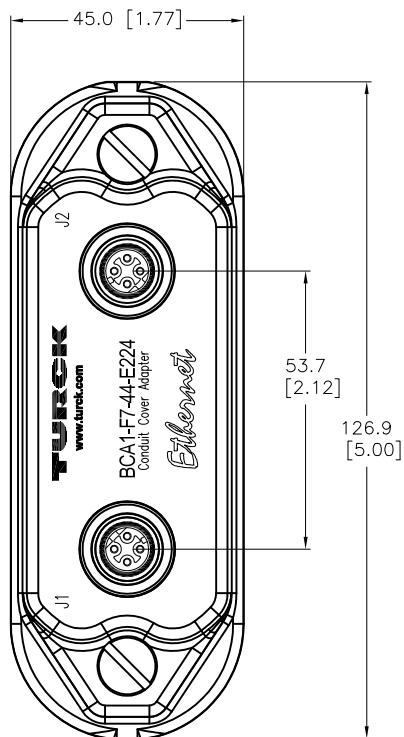


SPECIFICATIONS

HOUSING MATERIAL/COLOR	NYLON/BLACK
RECEPTACLE HOUSING MAT'L/PLATING	BRASS/NICKEL
CONTACT CARRIER MATERIAL/COLOR	TPU/BLACK
CONTACT MATERIAL/PLATING	BRASS/GOLD
OPERATING VOLTAGE	40 V
OPERATING CURRENT	4 A
WIRE TERMINATION METHOD	110 PUNCH DOWN BLOCKS (IDC)
PROTECTION CLASS to DIN 40050	IP 67 - ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED
OPERATING TEMPERATURE	-30°C to +80°C (-22°F to +176°F)

SOURCE DRAWING - FOR REFERENCE ONLY

↑ = 90° CORDSET CABLE DIRECTION

RELATED DOCUMENTS 1. 2. 3. 4.	3RD ANGLE PROJECTION			THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		<div>TURCK INC</div> <div>High Technology Sensors and Automation Controls</div> <div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com</div>		
	MATERIAL	ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY CONTACT TURCK FOR MORE INFORMATION	DRFT	KMY	DATE	08/03/12	DESCRIPTION BCA1-F7-44-E224	
	APVD		D.E.	SCALE	1=1.5			
FINISH	UNIT OF MEASUREMENT MILLIMETER [INCH] DO NOT SCALE THIS DRAWING		IDENTIFICATION NO. U2-20679				REV A	
		FILE: U2-20679				SHEET 1 OF 1		

A	DRAWING RELEASE	KMY	08/08/12	
REV	DESCRIPTION	BY	DATE	ECO NO.