




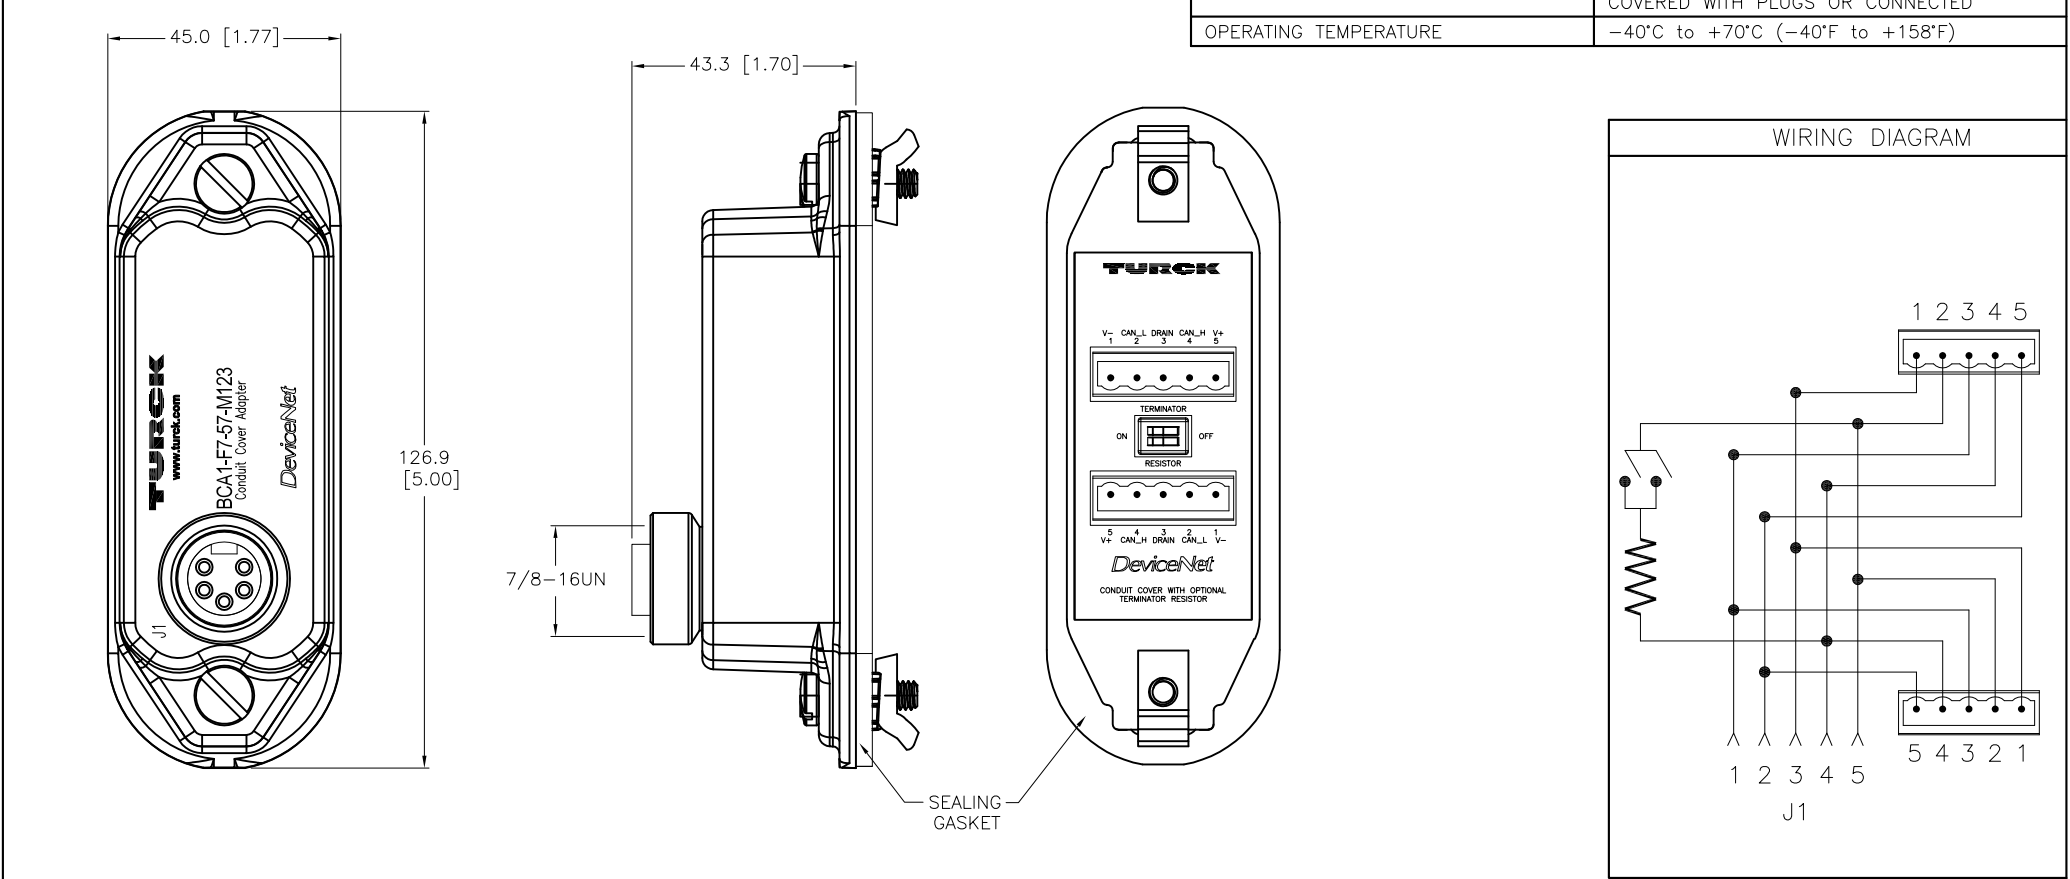
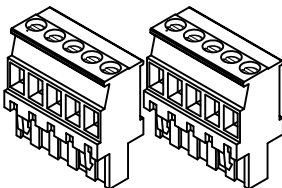



J1 CONNECTORS	TERMINAL BLOCK PLUGS	SPECIFICATIONS																			
<div><div><div>1 = DRAIN</div><div>2 = + VOLTAGE</div><div>3 = - VOLTAGE</div><div>4 = CAN_H</div><div>5 = CAN_L</div></div></div> <div></div>	<div><div><div>1 = - VOLTAGE</div><div>2 = CAN_L</div><div>3 = DRAIN</div><div>4 = CAN_H</div><div>5 = + VOLTAGE</div></div></div> <div></div>	<table><tr><td>HOUSING MATERIAL/COLOR</td><td>NYLON/BLACK</td></tr><tr><td>RECEPTACLE HOUSING MATERIAL/FINISH</td><td>STAINLESS STEEL/PASSIVATED</td></tr><tr><td>CONTACT CARRIER MATERIAL</td><td>TPU</td></tr><tr><td>CONTACT MATERIAL/PLATING</td><td>BRASS/GOLD</td></tr><tr><td>OPERATING VOLTAGE</td><td>40 V</td></tr><tr><td>OPERATING CURRENT</td><td>8 A</td></tr><tr><td>OPTIONAL TERMINATOR RESISTOR</td><td>1 OF 2 SWITCHES IN "ON" POSITION</td></tr><tr><td>PROTECTION CLASS to DIN 40050</td><td>IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED</td></tr><tr><td>OPERATING TEMPERATURE</td><td>–40°C to +70°C (–40°F to +158°F)</td></tr></table>	HOUSING MATERIAL/COLOR	NYLON/BLACK	RECEPTACLE HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED	CONTACT CARRIER MATERIAL	TPU	CONTACT MATERIAL/PLATING	BRASS/GOLD	OPERATING VOLTAGE	40 V	OPERATING CURRENT	8 A	OPTIONAL TERMINATOR RESISTOR	1 OF 2 SWITCHES IN "ON" POSITION	PROTECTION CLASS to DIN 40050	IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED	OPERATING TEMPERATURE	–40°C to +70°C (–40°F to +158°F)	
HOUSING MATERIAL/COLOR	NYLON/BLACK																				
RECEPTACLE HOUSING MATERIAL/FINISH	STAINLESS STEEL/PASSIVATED																				
CONTACT CARRIER MATERIAL	TPU																				
CONTACT MATERIAL/PLATING	BRASS/GOLD																				
OPERATING VOLTAGE	40 V																				
OPERATING CURRENT	8 A																				
OPTIONAL TERMINATOR RESISTOR	1 OF 2 SWITCHES IN "ON" POSITION																				
PROTECTION CLASS to DIN 40050	IP 67 – ONLY WHEN ALL RECEPTACLES ARE COVERED WITH PLUGS OR CONNECTED																				
OPERATING TEMPERATURE	–40°C to +70°C (–40°F to +158°F)																				
<div><div></div><div>45.0 [1.77]</div><div></div></div>																					



					SOURCE DRAWING - FOR REFERENCE ONLY								
<div>RELATED DOCUMENTS</div> <div>1. 2. 3. 4.</div>					3RD ANGLE PROJECTION		<div>THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.</div> <div></div>		<div>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax turck.com</div> <div>TURCK INC <i>High Technology Sensors and Automation Controls</i></div>				
<div>MATERIAL</div>					<div>ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY</div>		DRFT RDS		DATE 03/27/12		<div>DESCRIPTION</div> <div>BCA1-F7-57-M123</div>		
							APVD D.E.		SCALE 1=1.5				
<div>FINISH</div>					<div>CONTACT TURCK FOR MORE INFORMATION</div>		<div>UNIT OF MEASUREMENT</div> <div>MILLIMETER [INCH]</div>		<div>IDENTIFICATION NO.</div> <div>U2-19331</div>		<div>REV</div> <div>A</div>		
A		DRAWING RELEASE			RDS	08/02/12							
REV		DESCRIPTION			BY	DATE		ECO NO.		FILE: U2-19331		SHEET 1 OF 1	