
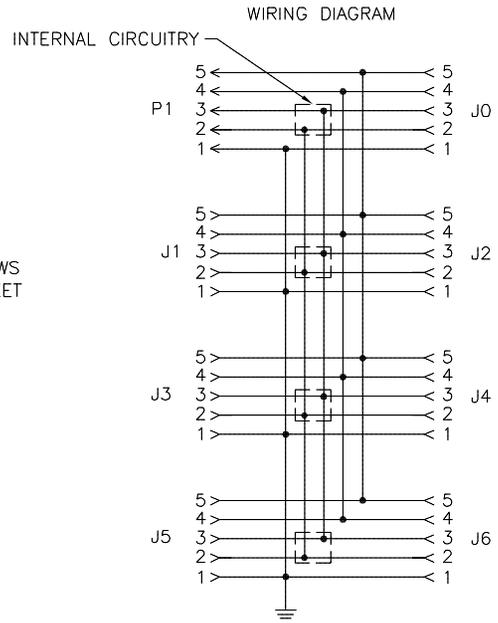



SPECIFICATIONS	
HOUSING MATERIAL/COLOR	TPU/BLACK
RECEPTACLE HOUSING/PLATING	BRASS/NICKEL
CONTACT CARRIERS	TPU
CONTACT MATERIAL/PLATING	BRASS/GOLD
OPERATING VOLTAGE	35 VDC
OPERATING CURRENT	4.0 A PER CONNECTOR
PROTECTION CLASS	NEMA 1,3,4,6,13 AND IEC IP67
OPERATING TEMPERATURE	-30°C to 80°C (-22°F to 176°F)
LED INDICATION, FLASHING AMBER	< 12.9 V
LED INDICATION, GREEN	21.9-25.6 V
LED INDICATION, AMBER	> 25.6 V

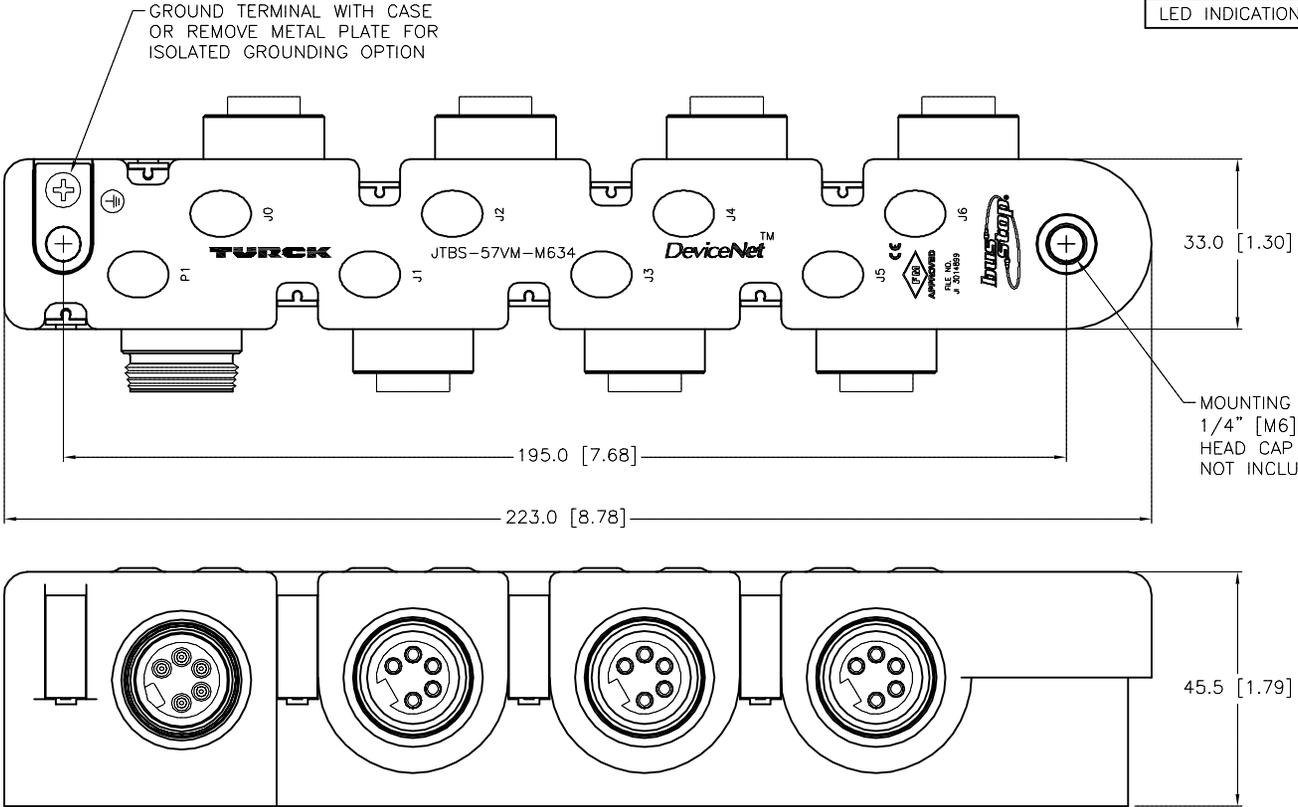

SOURCE DRAWING - FOR REFERENCE ONLY

NOTES:

1. INTERNAL VOLTAGE MONITORING CIRCUITRY IS LOCATED BETWEEN PINS 2 AND 3.

RELATED DOCUMENTS		3RD ANGLE PROJECTION		THIS DRAWING IS CONFIDENTIAL AND THE PROPERTY OF TURCK INC. USE OF THIS DOCUMENT WITHOUT WRITTEN PERMISSION IS PROHIBITED.		 <p>3000 CAMPUS DRIVE MINNEAPOLIS, MN 55441 1-800-544-7769 (763) 553-7300 (763) 553-0708 fax www.turck.us</p>		
1.			DRFT	GC	DATE	06/03/02	DESCRIPTION JTBS-57VM-M634	
2.			APVD	GC	SCALE	1=1.5		
3.		ALL DIMENSIONS DISPLAYED ON THIS DRAWING ARE FOR REFERENCE ONLY	UNIT OF MEASUREMENT MILLIMETER [INCH]				IDENTIFICATION NO. U8684-64	REV E
4.			CONTACT TURCK FOR MORE INFORMATION					
MATERIAL		DO NOT SCALE THIS DRAWING		FILE: U8684-64		SHEET 1 OF 1		
FINISH								

E	UPDATED NOTES AND WIRING DIAGRAM PER ECO	TV	08/26/16	56165
REV	DESCRIPTION	BY	DATE	ECO NO.