

# Product data sheet

## Characteristics

# QOU260VH

Mini circuit breaker, QOU, 60A, 2 pole,  
120/240VAC, 22kA

Product availability : Non-Stock - Not normally stocked in distribution facility



Price\* : 204.12 USD



### Main

Product or component type	Miniature circuit-breaker
Range of product	QOU
Circuit breaker type	Standard
Circuit breaker application	HACR and Switching Duty rated

### Complementary

Line Rated Current	60 A
Electrical connection	Slotted box lugs, line side Slotted box lugs, load side
[Ue] rated operational voltage	120/240 V AC
Mounting mode	Unit mount
AWG gauge	AWG 14...AWG 2 aluminium/copper
Height	4.05 in (102.87 mm)
Width	1.5 in (38.10 mm)
Depth	2.95 in (74.93 mm)
Tightening torque	45 lbf.in (5.08 N.m) (AWG 14...AWG 2)

### Environment

Product certifications	CSA IEC UL Listed
------------------------	-------------------------

### Ordering and shipping details

Category	00900 - QOU BREAKERS & SWITCH
Discount Schedule	DE2

\* Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Jul 30, 2021

GTIN	00785901631217
Nbr. of units in pkg.	1
Package weight(Lbs)	12.64 oz (358.338 g)
Returnability	Yes
Country of origin	MX

### Packing Units

Unit Type of Package 1	PCE
Package 1 Height	2.10 in (5.334 cm)
Package 1 width	4.80 in (12.192 cm)
Package 1 Length	3.60 in (9.144 cm)


### Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a> Product out of China RoHS scope. Substance declaration for your information.
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Halogen content performance	Halogen free product

### Contractual warranty


Warranty	18 months
----------	-----------

Dimensions

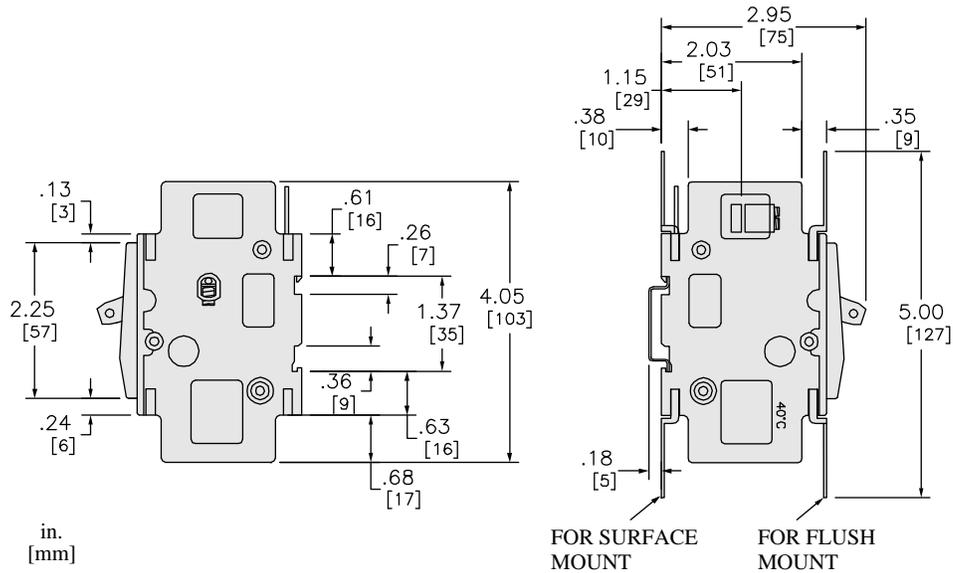

2.50 [64] MIN. WIRE BENDING SPACE FOR 2 AWG  
 1.50 [38] MIN. WIRE BENDING SPACE FOR 14 AWG  
 TYP. BOTH ENDS FOR ALL CB'S SHOWN  
 PER ARTICLE 430-1-(B) NEC

[DIMENSIONAL EXAMPLE ONLY BELOW]

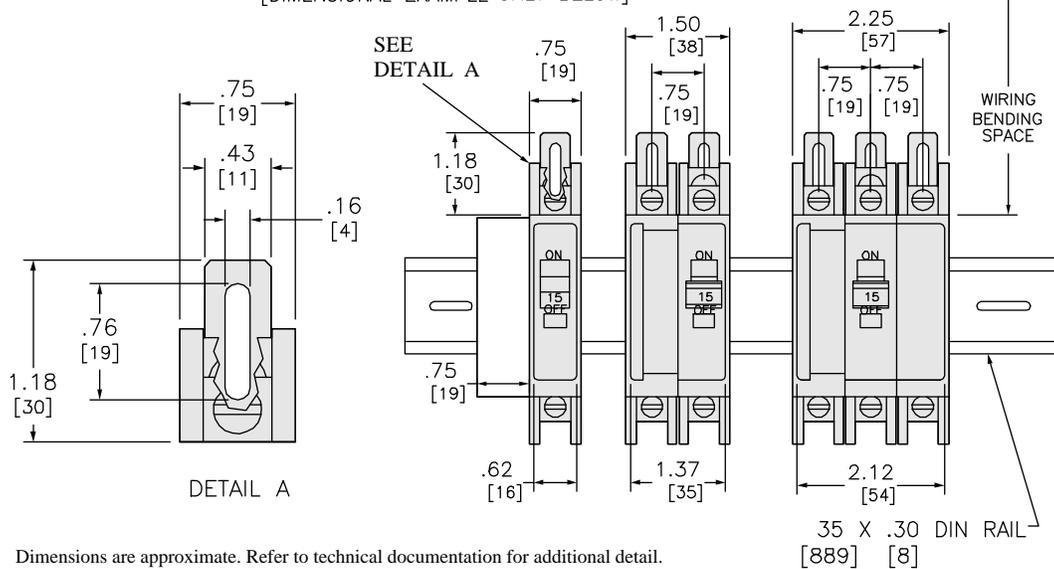

Dimensions are approximate. Refer to technical documentation for additional detail.