

# Product data sheet

## Characteristics

# QOUR2203100

Mini circuit breaker, QOU, 20A, 2 pole, 120/240 VAC, 10kA, field reversible lugs, mounting foot



Price\* : 105.00 USD



### Main

|                             |                               |
|-----------------------------|-------------------------------|
| Product or component type   | Miniature circuit-breaker     |
| Range of product            | QOU                           |
| Circuit breaker type        | Standard                      |
| Circuit breaker application | HACR and Switching Duty rated |

### Complementary

|                                |  |
|--------------------------------|--|
| Line Rated Current             | 20 A   |
| Electrical connection          | Slotted box lugs, line side<br>Slotted box lugs, load side |
| [Ue] rated operational voltage | 120/240 V AC<br>120 V AC<br>48 V DC                        |
| Mounting mode                  | Unit mount   |
| AWG gauge                      | AWG 14...AWG 2 aluminium/copper                            |
| Height                         | 4.05 in (102.87 mm)  |
| Width                          | 1.5 in (38.10 mm)  |
| Depth                          | 2.95 in (74.93 mm)   |
| Tightening torque              | 45 lbf.in (5.08 N.m) (AWG 14...AWG 2)                      |

### Environment

|                        |                         |
|------------------------|-------------------------|
| Product certifications | IEC<br>CSA<br>UL Listed |
|------------------------|-------------------------|

### Ordering and shipping details

|          |                             |
|----------|-----------------------------|
| Category | 00900-QOU BREAKERS & SWITCH |
|----------|-----------------------------|

\* Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

|                     |                      |
|---------------------|----------------------|
| Discount Schedule   | DE2                  |
| GTIN                | 00785901825258       |
| Package weight(Lbs) | 12.64 oz (358.338 g) |
| Returnability       | No                   |
| Country of origin   | MX                   |


### Offer Sustainability

|                             |  |
|-----------------------------|--|
| Sustainable offer status    | Green Premium product                            |
| REACH free of SVHC          | Yes  |
| EU RoHS Directive           | Compliant<br><a href="#">EU RoHS Declaration</a> |
| Toxic heavy metal free      | Yes  |
| Mercury free                | Yes  |
| RoHS exemption information  | <a href="#">Yes</a>                              |
| China RoHS Regulation       | <a href="#">China RoHS declaration</a>           |
| Environmental Disclosure    | <a href="#">Product Environmental Profile</a>    |
| Halogen content performance | Halogen free product                             |

### Contractual warranty


|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

Dimensions

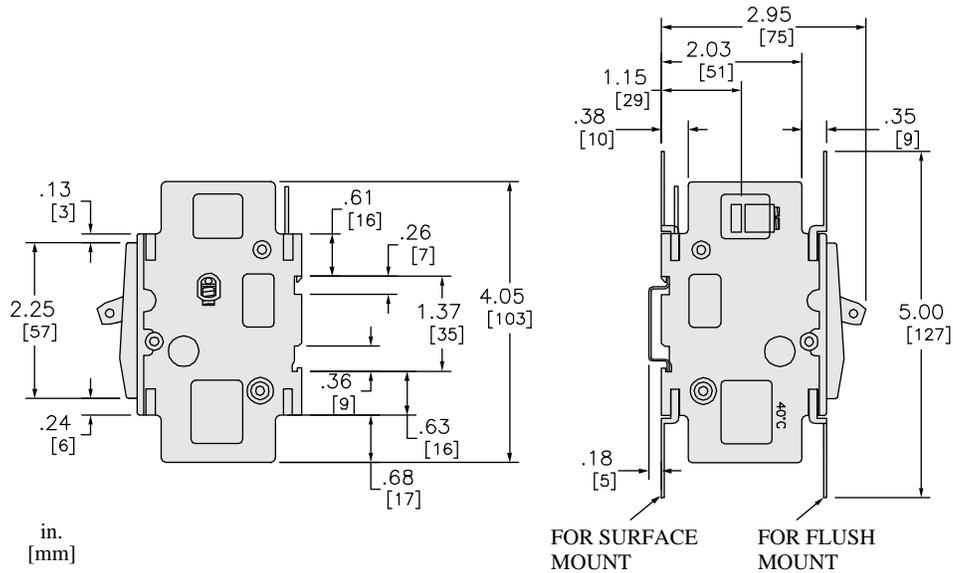

2.50 [64] MIN. WIRE BENDING SPACE FOR 2 AWG  
 1.50 [38] MIN. WIRE BENDING SPACE FOR 14 AWG  
 TYP. BOTH ENDS FOR ALL CB'S SHOWN  
 PER ARTICLE 430-1-(B) NEC

[DIMENSIONAL EXAMPLE ONLY BELOW]

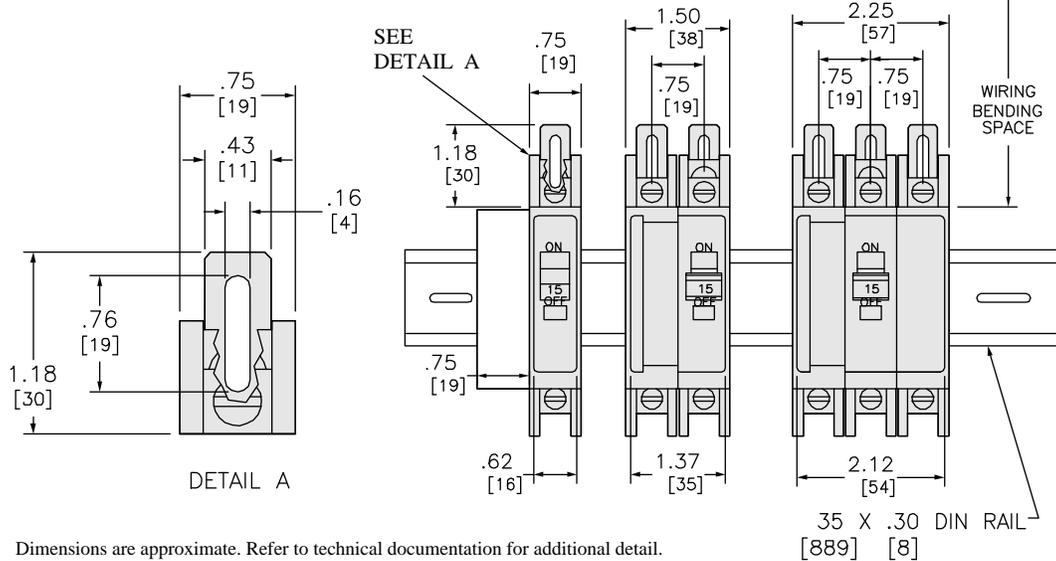

Dimensions are approximate. Refer to technical documentation for additional detail.