

Product data sheet

Characteristics

HOM4080M200PQCVP

Load center, Homeline, 1 phase, 40 spaces, 80 circuits, 200A convertible main breaker, PoN, NEMA1, Qwik-grip, value pack

Product availability : Stock - Normally stocked in distribution facility



Price* : 1,218.15 USD



Main

| | |
|--|---|
| Product Type | Load Center |
| Marketing Trade Name | Homeline |
| Load Center Type | Main breaker |
| Rated Current | 200 A |
| Number of Spaces | 40 |
| Maximum Number of Single Pole Circuits | 80 |
| Enclosure Rating | NEMA 1 indoor |
| Cover Type | Combination flush/surface cover |
| Provided Equipment | Circuit-breaker 2) 1P 20 A 120/240 V AC Circuit-breaker 1) 2P 100 A 120/240 V AC main supply ready assembled Circuit-breaker 1) 2P 30 A 120/240 V AC Load center 1) Qwik grip assembly kit 1) |

Complementary

| | |
|-----------------------------------|------------------------------------|
| Max Short Circuit Current Rating | 10 kA |
| Maximum Number of Tandem Breakers | 40 |
| Number of Phases | 1 phase |
| Voltage Rating | 120/240 V AC |
| Wire Size | AWG 4...250 kcmil aluminium/copper |
| Ground Bar | Grounding bar (ordered separately) |
| Enclosure Material | Welded galvanized steel |
| Surface Finish | Baked enamel Gray |

* Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

| | |
|------------|--------------------|
| Box Number | 12Q |
| Height | 39.37 in (1000 mm) |
| Depth | 3.74 in (95 mm) |
| Width | 14.25 in (362 mm) |

Environment

| | |
|---------------------------------------|---------------------------------|
| Ambient Air Temperature for Operation | 23 °F (-5 °C) 104 °F (40 °C) |
|---------------------------------------|---------------------------------|

Ordering and shipping details

| | |
|-----------------------|--------------------------------|
| Category | 00185 - MISC. HOM LOAD CENTERS |
| Discount Schedule | DE3C |
| GTIN | 00785901613879 |
| Nbr. of units in pkg. | 1 |
| Package weight(Lbs) | 40.20 lb(US) (18.234 kg) |
| Returnability | Yes |
| Country of origin | US |


Packing Units

| | |
|------------------------------|----------------------------|
| Unit Type of Package 1 | PCE |
| Package 1 Height | 39.37 in (100 cm) |
| Package 1 width | 14.25 in (36.2 cm) |
| Package 1 Length | 3.74 in (9.5 cm) |
| Unit Type of Package 2 | PAL |
| Number of Units in Package 2 | 18 |
| Package 2 Weight | 755.00 lb(US) (342.462 kg) |
| Package 2 Height | 38.00 in (96.52 cm) |
| Package 2 width | 40.00 in (101.6 cm) |
| Package 2 Length | 48.00 in (121.92 cm) |

Offer Sustainability

| | |
|----------------------------|---|
| California proposition 65 | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |
| REACH Regulation | REACH Declaration |
| REACH free of SVHC | Yes |
| EU RoHS Directive | Compliant EU RoHS Declaration |
| Toxic heavy metal free | Yes |
| Mercury free | Yes |
| RoHS exemption information | Yes |
| China RoHS Regulation | China RoHS declaration Pro-active China RoHS declaration (out of China RoHS legal scope) |

Dimensions

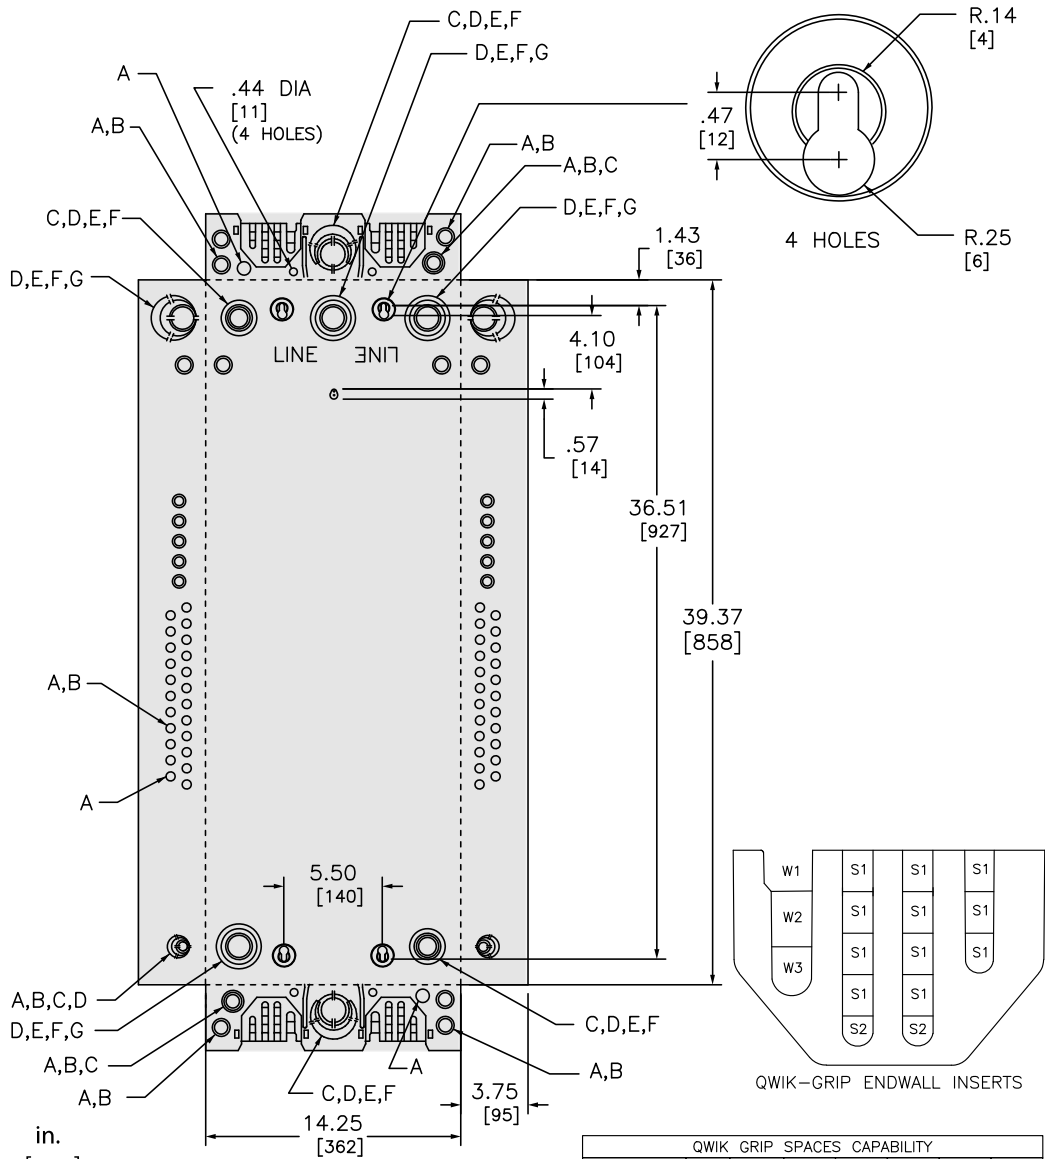


| KNOCKOUTS | | | | | | | |
|-----------|-----|-----|------|------|------|------|------|
| SYMBOLS | A | B | C | D | E | F | G |
| IN | .50 | .75 | 1.00 | 1.25 | 1.50 | 2.00 | 2.50 |
| MM | 13 | 19 | 25 | 32 | 38 | 51 | 64 |

| CABLE TYPE | QWIK GRIP SPACES CAPABILITY | | | | | | |
|------------|-----------------------------|---------------|------|------|------|------|------|
| | 10-3 FLAT | 10-3 ROUND | 10-2 | 12-3 | 12-2 | 14-3 | 14-2 |
| W1 | | Y | | | | | |
| W2 | Y | | Y | Y | | Y | |
| W3 | | | Y | Y | | Y | |
| S1 | | | | | Y | | Y |
| S2 | | | | | | | Y |

Dimensions are approximate. Refer to technical documentation for additional detail.

Wiring Diagram

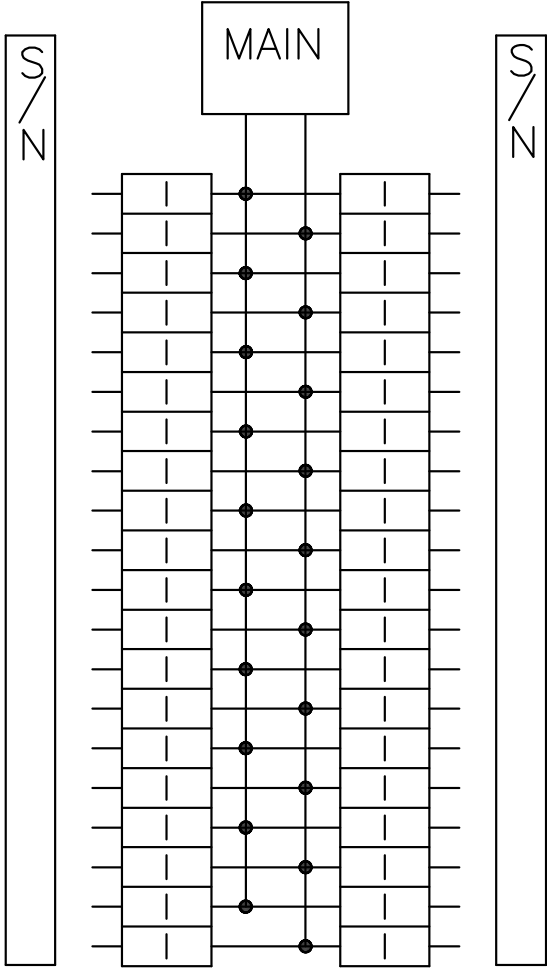

HOM4080M200PQC
HOM4080M200PQCVP