

Product data sheet

Characteristics

RXZE14P

Harmony, Push-in socket, for RXM relays, 12 A / 2 CO, 6 A/4 CO, spring clamp terminals, separate contact, 250 V AC

Product availability : Non-Stock - Not normally stocked in distribution facility



Price* : 7.82 USD



Main

Range of product	Harmony Electromechanical Relays Harmony Timer Relays
Product or component type	Socket
Contact terminal arrangement	Separate
Product compatibility	Plug-in relay RXM with 2 C/O contact Plug-in relay RXM 4 C/O
Shape of pin	Flat
Device short name	RXZ
Sale per indivisible quantity	10

Complementary

[Ith] conventional free air thermal current	12 A 2 C/O relays 6 A 4 C/O relays
[Ue] rated operational voltage	250 V IEC 300 V UL
Connections - terminals	Spring clamp terminals (push 'n stay), 1 x 0.5...1 x 1.5 mm² AWG 20...AWG 16) flexible with cable end Spring clamp terminals (push 'n stay), 1 x 0.5...1 x 1.5 mm² AWG 20...AWG 16) solid without cable end
Fixing mode	Clip-on 35 mm symmetrical DIN rail)
Marking	CE
Height	3.35 in (85 mm)
Length	3.86 in (98 mm)
Width	1.22 in (31 mm)
Net Weight	0.18 lb(US) (0.080 kg)

* Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Jul 30, 2021

Environment

[Uimp] rated impulse withstand voltage	4 kV
[Ui] rated insulation voltage	250 V
Overvoltage category	III
Pollution degree	3
Standards	IEC 61984
Product certifications	CSA Lloyd's UL EAC
Ambient air temperature for storage	-40...185 °F (-40...85 °C)
Ambient air temperature for operation	-40...131 °F (-40...55 °C)
IP degree of protection	IP20
Dielectric strength	2500 V

Ordering and shipping details

Category	21128 - ZELIO ICE CUBE RELAY ACCESSORIES
Discount Schedule	CP2
GTIN	00785901985242
Nbr. of units in pkg.	1
Package weight(Lbs)	2.61 oz (74 g)
Returnability	Yes

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	1.22 in (3.1 cm)
Package 1 width	3.35 in (8.5 cm)
Package 1 Length	3.98 in (10.1 cm)

Offer Sustainability


Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACH Regulation	REACH Declaration
REACH free of SVHC	Yes
EU RoHS Directive	Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration
Environmental Disclosure	Product Environmental Profile
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

Contractual warranty


Warranty	18 months
----------	-----------

Dimensions

mm
in.

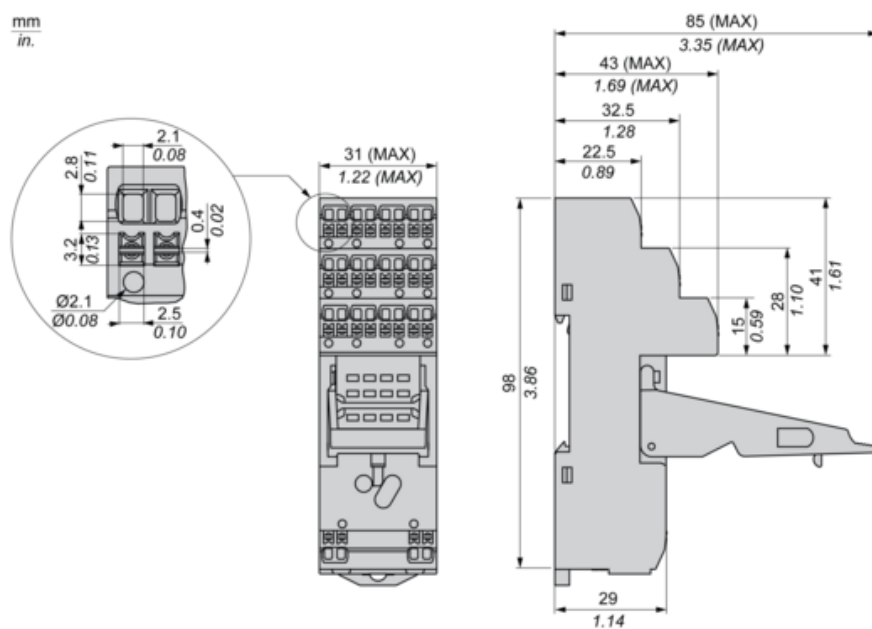

Wiring

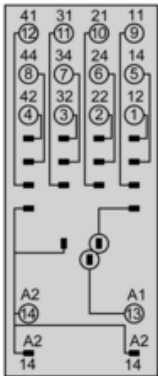


Installation



Installation


Push In (Insert Cable)

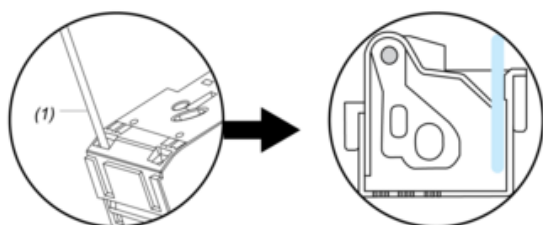

(1) : Insert Wire

Uninstallation

Pull Out (Remove Cable)

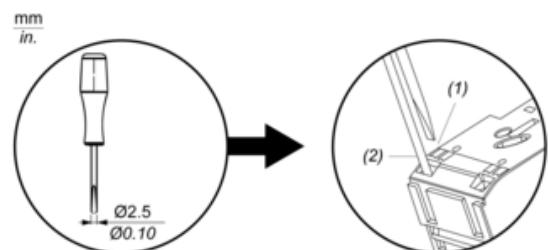

(1) : Press

(2) : Pull Wire