Product data sheet Characteristics

HDL36015AASA

Circuit breaker, PowerPacT H, thermal magnetic, unit mount, 15A, 3 pole, 14 kA, 600 VAC, shunt trip, aux sw, 80% rated

Product availability: Non-Stock - Not normally stocked in distribution facility







Main

PowerPact H	- 5
Circuit breaker	- 44

Complementary

Complementary		
Line Rated Current	15 A	
Number of Poles	3P	
Breaking capacity code	D	
Mounting mode	Unit mount	
Magnetic hold current	350 A	
Magnetic tripping current	750 A	
Electrical connection	Lugs load Lugs line	
Tightening torque	44.25 lbf.in (5 N.m) 0.000.15 in² (2.595 mm²) (AWG 14AWG 3/0)	
Height	6.4 in (162.56 mm)	
Width	4.12 in (104.65 mm)	
Depth	4.36 in (110.74 mm)	
Continuous current rating	80 %	

Environment

		— ≥
Product certifications	CE	.0.
	CCC	.0.
	UL Listed	ntat
	CSA	E G
	IEC	50
Ambient air temperature for operation	104 °F (40 °C)	— sid


Ordering and shipping details

Category	01110 - HD,JD UNIT MT BREAKER/SWITCH
Discount Schedule	DE2
Nbr. of units in pkg.	1
Package weight(Lbs)	5 lb(US) (2.27 kg)
Returnability	No
Country of origin	US

Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: DINP, which is known to the State of California to cause cancer, and DIDP, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACh Regulation	REACh Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
PVC free	Yes

Dimensions

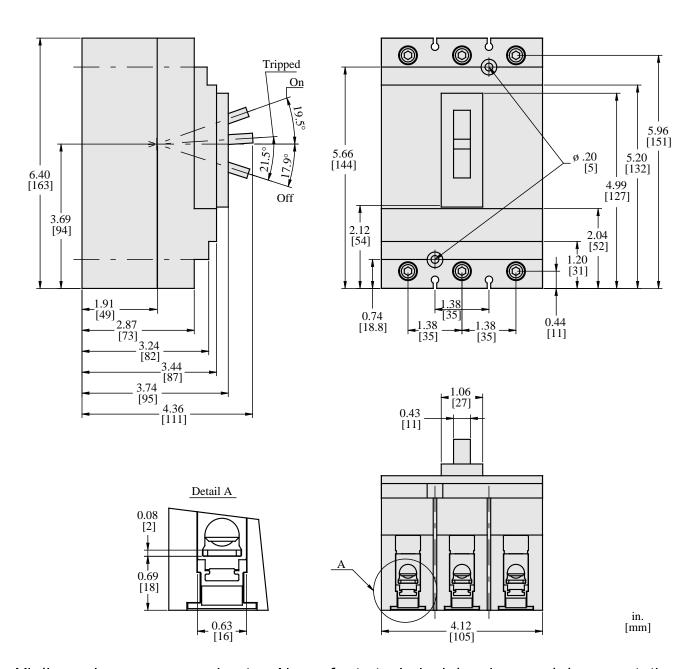

All dimensions are approximate. Also refer to technical drawings and documentation.