Product data sheet Characteristics

HDL36100U44X

Circuit breaker, PowerPacT H, Micrologic 6.2A, unit mount, 100A, 3 pole, 14 kA, 600 VAC, 80% rated

Product availability: Non-Stock - Not normally stocked in distribution facility

SQUARE D



Price*: 2,991.00 USD



Main

Range of product	PowerPact H	-65
Product or component type	Circuit breaker	

Complementary

Line Rated Current	100 A	
Number of Poles	3P	
Breaking capacity code	D	rm.
Mounting mode	Unit mount	
Electrical connection	Lugs load	
	Lugs line	80
Tightening torque	44.25 lbf.in (5 N.m) 0.000.15 in² (2.595 mm²) (AWG 14AWG 3/0)	
Height	6.4 in (162.56 mm)	<u> </u>
Width	4.12 in (104.65 mm)	
Depth	4.36 in (110.74 mm)	चा ठ
Continuous current rating	80 %	H:

Environment

Product certifications	IEC	_
	CE	1
	CSA	.!
	CCC	
	UL Listed	4
Ambient air temperature for operation	104 °F (40 °C)	_

^{*} Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Ordering and shipping details

Category	01107 - H/J ELEC TRIP UNIT MOUNT BREAKER/SW
Discount Schedule	DE2
GTIN	00785901701941
Nbr. of units in pkg.	1
Package weight(Lbs)	5.00 lb(US) (2.268 kg)
Returnability	Yes
Country of origin	US

Packing Units

Unit Type of Package 1	PCE
Package 1 Height	5.13 in (13.018 cm)
Package 1 width	7.25 in (18.415 cm)
Package 1 Length	8.44 in (21.433 cm)


Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: DINP, which is known to the State of California to cause cancer, and DIDP, which is known to the State of California to cause birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov
REACh Regulation	REACh Declaration
EU RoHS Directive	Compliant EU RoHS Declaration
Mercury free	Yes
RoHS exemption information	Yes
China RoHS Regulation	China RoHS declaration Product out of China RoHS scope. Substance declaration for your information.
Environmental Disclosure	Product Environmental Profile
Circularity Profile	End of Life Information
PVC free	Yes

Contractual warranty

Warranty	18 months

Dimensions

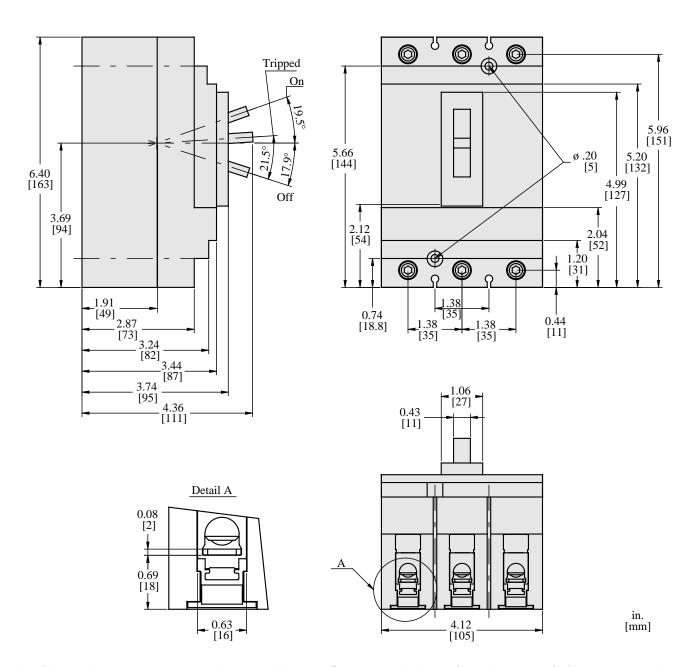

All dimensions are approximate. Also refer to technical drawings and documentation.