


# NSYTRV44DPE

## SCREW TERMINAL, DOUBLE LEVEL, PROTECTIVE EARTH, 4 POINTS, 4MM<sup>2</sup>, GREEN

Product availability : Non-Stock - Not normally stocked in distribution facility



Price\* : 18.60 USD

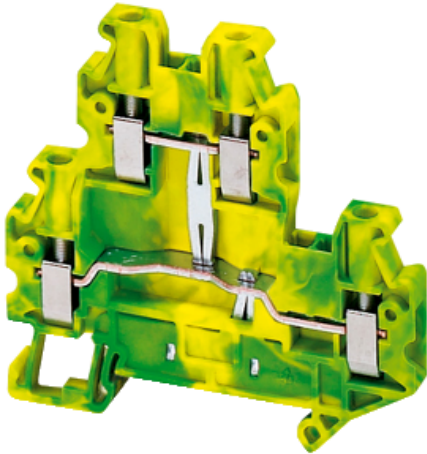

### Main

Range	Linery
Product name	Linery TR
Product or component type	Terminal block
Device short name	TRV
Terminal block type	Protective earth
Terminal block level	2
Mounting mode	Clip-on
Nominal cross section	0.01 in <sup>2</sup> (4 mm <sup>2</sup> )
Length	2.75 in (69.9 mm)
Color	Green-yellow
Quantity per set	Set of 50

### Complementary

Width	0.24 in (6.2 mm)
Height	2.56 in (65 mm)
Connections - terminals	1 x screw terminal upstream 1 x screw terminal downstream
Number of connections	2
Connection position	Sideways
Number of measurement input	4
Cable cross section	0.00...0.01 in <sup>2</sup> (0.14...6 mm <sup>2</sup> ), solid 0.00...0.01 in <sup>2</sup> (0.2...4 mm <sup>2</sup> ), flexible with cable end 0.00...0.01 in <sup>2</sup> (0.14...6 mm <sup>2</sup> ), flexible without cable end
Tightening torque	5.31...7.08 lbf.in (0.6...0.8 N.m)

\* Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Wire stripping length	0.35 in (9 mm)
Tool type	Connection screwdriver Disconnection screwdriver
Material	Polyamide 6/6: insulating case
Dielectric loss	0.01 at 1 MHz IEC 60250 0.01 at 1 MHz VDE 0303-T4
Dielectric constant	3.7 at 1 MHz
Resistivity	10000 M $\Omega$ .m IEC 60093 10000 M $\Omega$ .m VDE 0303-T30
Surface resistance	1000 G $\Omega$ IEC 60093 1000 G $\Omega$ VDE 0303-T30
Creep resistance	500 CTI (> 400 kV) conforming to IEC 60093 500 CTI (> 400 kV) conforming to VDE 0303-T30
Flame retardance	V0 0.03 in (0.8 mm) UL 94
Net Weight	0.82 oz (23.3 g)
Range compatibility	Prisma G Prisma P Prisma PH Prisma Pack Spacial Kaedra Pragma TeSys
Product compatibility	Spacial enclosures

## Environment

Product certifications	LR GL CSA ATEX EAC DNV IEC-Ex CURus
Dielectric strength	1000 V IEC 60243-1
Ambient air temperature for operation	-40...266 °F (-40...130 °C) IEC 60216-1 -40...266 °F (-40...130 °C) VDE 0304-T21

## Ordering and shipping details

Category	21715 - IEC TERMINAL BLOCKS-NSY,AM1,DF6,GK1
Discount Schedule	CP5
GTIN	03606480532054
Nbr. of units in pkg.	1
Package weight(Lbs)	0.81 oz (23 g)
Returnability	No
Country of origin	DE

## Packing Units

Unit Type of Package 1	PCE
Package 1 Height	2.76 in (7 cm)
Package 1 width	2.99 in (7.6 cm)
Package 1 Length	12.44 in (31.6 cm)
Unit Type of Package 2	BB1
Number of Units in Package 2	50
Package 2 Weight	2.67 lb(US) (1.21 kg)
Package 2 Height	2.76 in (7 cm)
Package 2 width	3.15 in (8 cm)
Package 2 Length	12.60 in (32 cm)

Unit Type of Package 3	S02
Number of Units in Package 3	200
Package 3 Weight	11.44 lb(US) (5.191 kg)
Package 3 Height	5.91 in (15 cm)
Package 3 width	11.81 in (30 cm)
Package 3 Length	15.75 in (40 cm)

### Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a> Product out of China RoHS scope. Substance declaration for your information.
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
Halogen content performance	Halogen free plastic parts product

### Contractual warranty

Warranty	18 months
----------	-----------