


# NSYTRV42SF5

## SCREW TERMINAL, FUSED, FOR 5X20,5X25,5X30 MM CARTRIDGE FUSE, 2PTS, 4M

Product availability : Stock - Normally stocked in distribution facility



Price\* : 7.80 USD

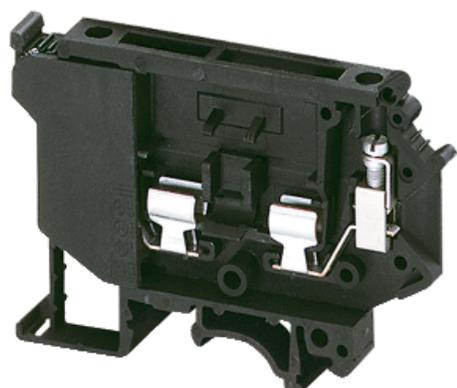

### Main

Range	Linergy
Product name	Linergy TR
Product or component type	Terminal block
Device short name	TRV
Device application	Protection
Terminal block type	Fused disconnect
Terminal block level	1
Mounting mode	Clip-on
Nominal cross section	0.01 in <sup>2</sup> (4 mm <sup>2</sup> )
Length	2.85 in (72.5 mm)
Color	Black
Quantity per set	Set of 50

### Complementary

Fuse size	5 x 20 mm
Width	0.32 in (8.2 mm)
Height	2.22 in (56.5 mm)
Connections - terminals	1 x screw terminal upstream 1 x screw terminal downstream
Number of connections	2
Connection position	Sideways
Number of measurement input	0
Cable cross section	0.00...0.01 in <sup>2</sup> (0.2...4 mm <sup>2</sup> ), flexible without cable end 0.00...0.01 in <sup>2</sup> (0.2...4 mm <sup>2</sup> ), solid or flexible with cable end

\* Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Tightening torque	4.43...7.08 lbf.in (0.5...0.8 N.m)
Wire stripping length	0.31 in (8 mm)
Tool type	Connection screwdriver Disconnection screwdriver
[Ue] rated operational voltage	500 V EN/IEC 60947-7-1 600 V cURus 600 V CSA
Line Rated Current	6.3 A EN/IEC 60947-7-1 12 A cURus 6.3 A CSA
Material	Polyamide 6/6: insulating case
Dielectric loss	0.01 at 1 MHz IEC 60250 0.01 at 1 MHz VDE 0303-T4
Dielectric constant	3.7 at 1 MHz
Resistivity	10000 Ω.cm IEC 60093 10000 Ω.cm VDE 0303-T30
Surface resistance	1000 MOhm IEC 60093 1000 MOhm VDE 0303-T30
Creep resistance	500 CTI (> 400 kB) conforming to IEC 60093 500 CTI (> 400 kB) conforming to VDE 0303-T30
Flame retardance	V0 0.03 in (0.8 mm) UL 94
Net Weight	0.65 oz (18.3 g)
Range compatibility	Prisma G Prisma P Prisma PH Prisma Pack Spacial Kaedra Pragma TeSys
Product compatibility	Spacial enclosures

## Environment

Product certifications	CURus CSA EAC
Dielectric strength	1000 V IEC 60243-1
Ambient air temperature for operation	-40...266 °F (-40...130 °C) IEC 60216-1 -40...266 °F (-40...130 °C) VDE 0304-T21

## Ordering and shipping details

Category	21715 - IEC TERMINAL BLOCKS-NSY,AM1,DF6,GK1
Discount Schedule	CP5
GTIN	03606480532337
Nbr. of units in pkg.	1
Package weight(Lbs)	0.60 oz (17 g)
Returnability	Yes
Country of origin	TR

## Packing Units

Unit Type of Package 1	PCE
Package 1 Height	0.31 in (0.8 cm)
Package 1 width	1.97 in (5 cm)
Package 1 Length	2.80 in (7.1 cm)

## Offer Sustainability

Sustainable offer status	Green Premium product
--------------------------	-----------------------

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS declaration</a> Product out of China RoHS scope. Substance declaration for your information.
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.
Halogen content performance	Halogen free plastic parts product

### Contractual warranty

Warranty	18 months
----------	-----------