

## Product data sheet

### Characteristics

# XVC4B2K

Harmony XVC, Monolithic precabled tower light, plastic, red orange, Ø40, base mounting, steady, IP54, 24 V AC/DC

Product availability : Non-Stock - Not normally stocked in distribution facility

Price\* : 155.00 USD



### Main

|                                    |   |
|------------------------------------|---|
| Range of product                   | Harmony XVC4                              |
| Product or component type          | Complete pre-wired monolithic tower light |
| Beacon or indicator bank unit type | 2 illuminated units                       |
| Sound signalling                   | Without                                   |
| Mounting diameter                  | 1.57 in (40 mm)                           |
| Component name                     | XVC                                       |
| Device short name                  | XVC                                       |
| Light source                       | LED steady red<br>LED steady orange       |
| Supply circuit type                | AC/DC                                     |

### Complementary

|  |   |
|--|---|
| Material                               | Polycarbonate illuminated unit<br>ABS (acrylonitrile butadiene-styrene) base unit<br>PBT + ABS (UL94HB) top cover |
| Mounting location                      | On base   |
| Product mounting                       | On base   |
| [Us] rated supply voltage              | 24 V  |
| [Us] rated supply voltage              | 24 V  |
| Cable cross section                    | 0.00 in <sup>2</sup> (0.33 mm <sup>2</sup> )  |
| AWG gauge                              | AWG 22  |
| Cable length                           | 19.69 in (500 mm)   |
| Marking                                | CE  |
| [Uimp] rated impulse withstand voltage | 0.8 kV  |
| Current consumption                    | 50 mA   |
| Flashing frequency                     | 1 Hz  |
| Net Weight                             | 0.26 lb(US) (0.12 kg)   |
| Height                                 | 5.33 in (135.5 mm)  |

\* Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Jul 30, 2021

## Environment

|                                       |   |
|---------------------------------------|---|
| Standards                             | EN/IEC 61000-6-3<br>EN/IEC 61000-6-2        |
| Product certifications                | UL  |
| Protective treatment                  | TC  |
| Ambient air temperature for storage   | -31...158 °F (-35...70 °C)                  |
| Ambient air temperature for operation | 14...122 °F (-10...50 °C)                   |
| Electrical shock protection class     | Class II EN/IEC 61140                       |
| Overvoltage category                  | Class II conforming to EN/IEC 61140         |
| IP degree of protection               | IP54 flat surface installation EN/IEC 60529 |

## Ordering and shipping details

|                       |                          |
|-----------------------|--------------------------|
| Category              | 22617 - XVC TOWER LIGHTS |
| Discount Schedule     | XV                       |
| GTIN                  | 03606480032431           |
| Nbr. of units in pkg. | 1                        |
| Package weight(Lbs)   | 9.17 oz (260 g)          |
| Returnability         | No                       |
| Country of origin     | ID                       |

## Packing Units

|                              |                         |
|------------------------------|-------------------------|
| Unit Type of Package 1       | PCE                     |
| Package 1 Height             | 2.76 in (7 cm)          |
| Package 1 width              | 2.83 in (7.2 cm)        |
| Package 1 Length             | 18.50 in (47 cm)        |
| Unit Type of Package 2       | S04                     |
| Number of Units in Package 2 | 12                      |
| Package 2 Weight             | 10.16 lb(US) (4.608 kg) |
| Package 2 Height             | 11.81 in (30 cm)        |
| Package 2 width              | 15.75 in (40 cm)        |
| Package 2 Length             | 23.62 in (60 cm)        |

## Offer Sustainability

|                            |   |
|----------------------------|---|
| California proposition 65  | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to <a href="http://www.P65Warnings.ca.gov">www.P65Warnings.ca.gov</a> |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)<br><a href="#">EU RoHS Declaration</a>   |
| Mercury free               | Yes   |
| RoHS exemption information | <a href="#">Yes</a>   |
| China RoHS Regulation      | <a href="#">China RoHS declaration</a>  |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>   |
| Circularity Profile        | <a href="#">End of Life Information</a>   |


## Contractual warranty

|          |           |
|----------|-----------|
| Warranty | 18 months |
|----------|-----------|

## Pre-assembled and Pre-wired Tower Light

### Dimensions

Below drawing shows the maximum configuration of the product. Select the number of stages according to the product characteristics in order to get b dimension.

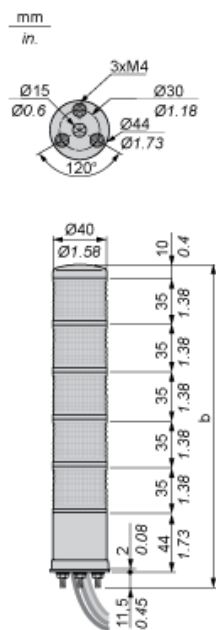

| No. of illuminated units | b Without buzzer (mm) | b Without buzzer (in) |
|--------------------------|-----------------------|-----------------------|
| 1 stage                  | 100.50                | 3.96                  |
| 2 stages                 | 135.50                | 5.33                  |
| 3 stages                 | 170.50                | 6.71                  |
| 4 stages                 | 205.50                | 8.09                  |
| 5 stages                 | 240.50                | 9.47                  |

Pre-assembled and Pre-wired Tower Light

Direct Mounting on Horizontal Support

Panel cut-out

