



Foundation Fieldbus Series MIN/MDC Receptacles


4 Conductor Foundation Fieldbus Receptacles, 18AWG




Front Mount Receptacles | 1/2"-14 NPT Threads | 300V, 10A | 300V, 4A | IP67 Rating



MIN Receptacles 1/2"-14 NPT						
# of Poles	Male Faceview	Color Code	Rating	Wire AWG	Male Receptacles	Female Receptacles
4	 7/8"-16UN2	1. Blue(-) 2. Orange(+) 3. Shield 4. N/C	300V 10A	18 AWG	FFIN-4MR-**-SS	FFIN-4FR-**-SS

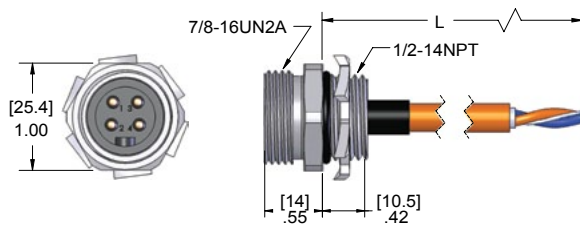

Male Receptacle

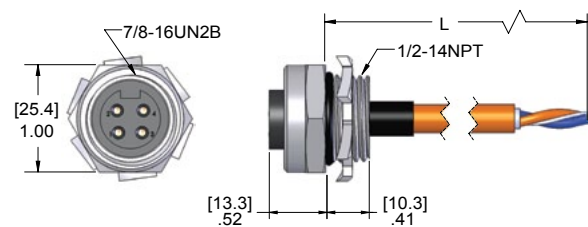

Female Receptacle


MDC Receptacles 1/2"-14 NPT						
# of Poles	Male Faceview	Color Code	Rating	Wire AWG	Male Receptacles	Female Receptacles
4	 M12 x 1	1. Blue(-) 2. Orange(+) 3. Shield 4. N/C	300V 4A	18 AWG	FFDC-4MR-2**-SS	FFDC-4FR-2**-SS

** Lengths in meters.


Lock Nut and O-Ring are included.

Specifications:

Shell:	Stainless Steel
Insulator:	FFIN: Oil Resistant Black PVC FFDC: Polyamide
Cable:	Orange PVC, 2x18 AWG Cable with Foil Shield
Contacts:	Copper Alloy with Gold Plating
O-Ring:	NBR
Lock Nut:	Nickel Plated Brass
Temperature:	-40°C to 105°C (-40°F to +221°F)

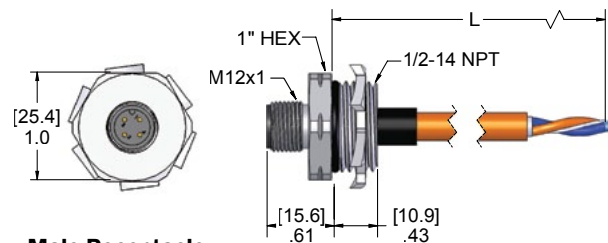

Male Receptacle

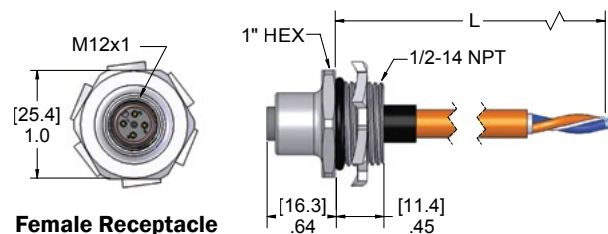

Female Receptacle