




Profibus-DP Series Receptacles

5 Conductor Profibus-DP Series Receptacles




PCB Mount Straight Receptacles | 150 Volt, 4 amps | IP67 Rating




| # of Poles | Male Faceview | Rating | Style | Male Receptacles | Female Receptacles |
|------------|--|------------|----------------------------|------------------|--------------------|
| 5 |  M12 x 1 | 150V 4A | PCB Mount | PBEC-5MR-PCB | PBEC-5FR-PCB |
| | | | PCB Mount w/ Ground Tab | PBECM-5MR-PCB | PBECM-5FR-PCB |


Male Straight

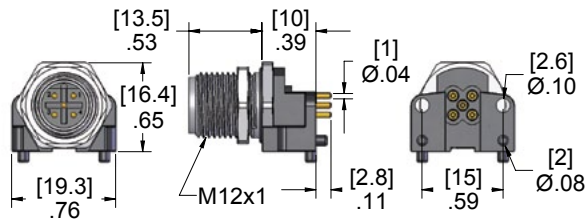


Female Straight

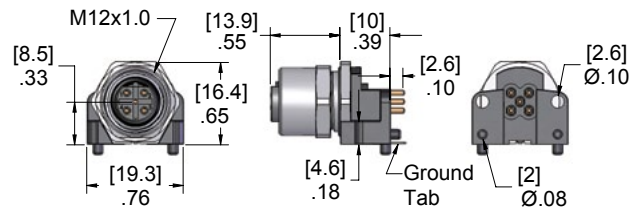

5 Pole
Male Straight Layout

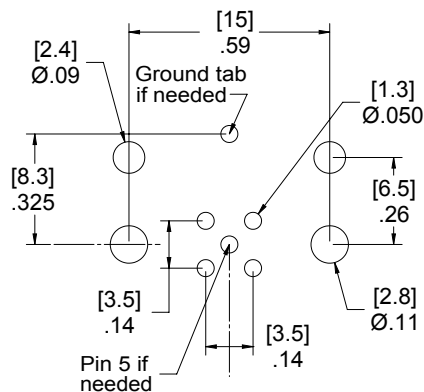

5 Pole
Female Straight Layout

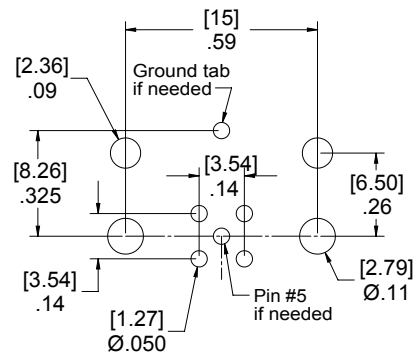

Specifications:

| | |
|-----------|--------------------------------|
| Body: | Polyamide |
| Contacts: | Copper Alloy with Gold Plating |
| Shell: | Nickel Plated Brass |
| O-Ring: | NBR |
| Jam Nut: | Nickel Plated Brass |