

X20(c)DO6639

1 General information

The module is equipped with 6 relay outputs.

- 6 digital outputs
- Relay module for 240 VAC / 30 VDC
- Switching current 2 A
- 6 normally open contacts
- Single-channel isolated outputs

Danger!

Risk of electric shock!

The terminal block is only permitted to conduct voltage when it is connected. It is not permitted to be disconnected or connected while voltage is applied or have voltage applied to it while it is removed under any circumstances.

This module is not permitted to be the last module connected on the X2X Link network. At least one subsequent X20ZF dummy module must provide protection against contact.

Danger!

The voltage classes on the terminal block must not be mixed! Only operation at mains voltage (e.g. 230 VAC) OR safety extra-low voltage (e.g. 24 VDC SELV) is permitted.

2 Coated modules

Coated modules are X20 modules with a protective coating for the electronics component. This coating protects X20c modules from condensation and corrosive gases.

The modules' electronics are fully compatible with the corresponding X20 modules.

For simplification purposes, only images and module IDs of uncoated modules are used in this data sheet.

The coating has been certified according to the following standards:

- Condensation: BMW GS 95011-4, 2x 1 cycle
- Corrosive gas: EN 60068-2-60, method 4, exposure 21 days



3 Order data


Model number	Short description	Figure
	Digital outputs	
X20DO6639	X20 digital output module, 6 relays, normally open contacts, 240 VAC / 2 A, 30 VDC / 2 A	
X20cDO6639	X20 digital output module, coated, 6 relays, normally open contacts, 240 VAC / 2 A, 30 VDC / 2 A	
	Required accessories	
	Bus modules	
X20BM12	X20 bus module, 240 VDC keyed, internal I/O supply continuous	
X20cBM12	X20 bus module, coated, 240 VAC keyed, internal I/O supply continuous	
	Terminal blocks	
X20TB32	X20 terminal block, 12-pin, 240 VAC keyed	

Table 1: X20DO6639, X20cDO6639 - Order data

4 Technical data

Model number	X20DO6639	X20cDO6639
Short description	6 digital outputs 30 VDC / 240 VAC, outputs are single-channel isolated	
General information		
B&R ID code	0xDF50	0xE22A
Status indicators	I/O function per channel, operating state, module status	
Diagnostics		
Module run/error	Yes, using status LED	
Outputs	Yes, using status LED	
Power consumption		
Bus	1 W	
Internal I/O	-	
Additional power dissipation caused by actuators (resistive) [W] ¹⁾	+0.36	
Certifications		
CE	Yes	
EAC	Yes	
UL	cULus E115267 Industrial control equipment	
HazLoc	cCSAus 244665 Process control equipment for hazardous locations Class I, Division 2, Groups ABCD, T5	
ATEX	Zone 2, II 3G Ex nA nC IIA T5 Gc IP20, Ta (see X20 user's manual) FTZÜ 09 ATEX 0083X	
DNV GL	Temperature: B (0 - 55°C) Humidity: B (up to 100%) Vibration: B (4 g) EMC: B (bridge and open deck)	
KR	Yes	
Digital outputs		
Variant	Relay / Normally open contact Channels are single-channel isolated	
Nominal voltage	30 VDC / 240 VAC	
Max. voltage	264 VAC	
Switching voltage	Max. 110 VDC / 264 VAC	
Rated frequency	DC / 45 to 63 Hz	
Nominal output current	2 A at 30 VDC / 2 A at 240 VAC	
Total nominal current	10 A at 30 VDC / 10 A at 240 VAC	
Actuator power supply	External	
Contact resistance	Max. 100 mΩ	
Switching delay		
0 → 1	≤10 ms	
1 → 0	≤10 ms	
Isolation voltages		
Channel - Bus	Tested at 2300 VAC	
Channel - Channel	Tested at 750 VAC	

Table 2: X20DO6639, X20cDO6639 - Technical data


Model number	X20DO6639	X20cDO6639
Service life		
Electrical ²⁾	Min. 120 x 10³ ops. (at 2 A / 240 VAC)	
Mechanical	Min. 2 x 10⁷ ops.	
Switching capacity		
Minimum	0.05 W DC / 2.4 W AC	
Maximum	60 W DC / 480 W AC	
Total power of all channels		
AC	3000 W	
DC	360 W	
Protective circuit		
Internal	None	
External		
AC	RC combination or VDR	
DC	Inverse diode, RC combination or VDR	
Electrical properties		
Electrical isolation	Channel isolated from bus	
Operating conditions		
Mounting orientation		
Horizontal	Yes	
Vertical	Yes	
Installation elevation above sea level		
0 to 2000 m	No limitations	
>2000 m	Not permitted	
Degree of protection per EN 60529	IP20	
Ambient conditions		
Temperature		
Operation		
Horizontal mounting orientation	-25 to 60°C	
Vertical mounting orientation	-25 to 50°C	
Derating	-	
Storage	-40 to 85°C	
Transport	-40 to 85°C	
Relative humidity		
Operation	5 to 95%, non-condensing	Up to 100%, condensing
Storage	5 to 95%, non-condensing	
Transport	5 to 95%, non-condensing	
Mechanical properties		
Note	Order 1x X20TB32 terminal block separately, Order 1x X20BM12 bus module separately	Order 1x X20TB32 terminal block separately, Order 1x X20cBM12 bus module separately
Spacing	12.5 ^{+0.2} mm	

Table 2: X20DO6639, X20cDO6639 - Technical data


- 1) Number of outputs x Contact resistance x Nominal output current²⁾. For a calculation example, see section "Mechanical and electrical configuration" of the X20 system user's manual.
- 2) With a resistive load. See also section "Electrical service life"

5 Status LEDs


For a description of the various operating modes, see section "Additional information - Diagnostic LEDs" of the X20 system user's manual.

Figure	LED	Color	Status	Description
	r	Green	Off	Module supply not connected
			Single flash	RESET mode
			Blinking	PREOPERATIONAL mode
			On	RUN mode
	e	Red	Off	Module supply not connected or everything OK
			On	Error or reset status
	e + r	Red on / Green single flash		Invalid firmware
	1 - 6	Orange		Output status of the corresponding digital output


6 Pinout

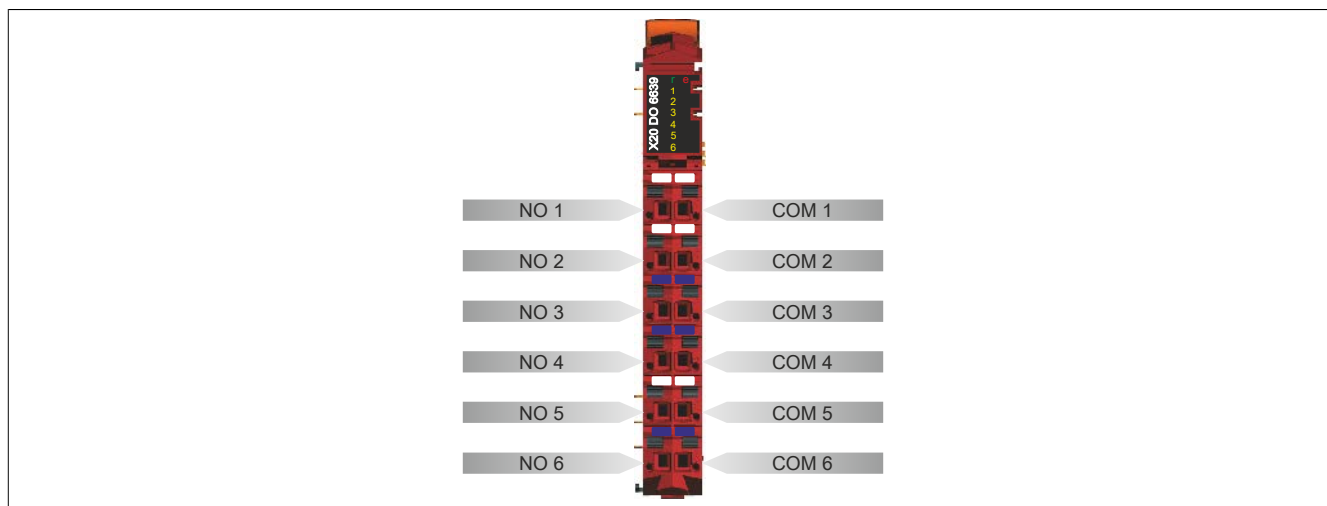


7 Connection example

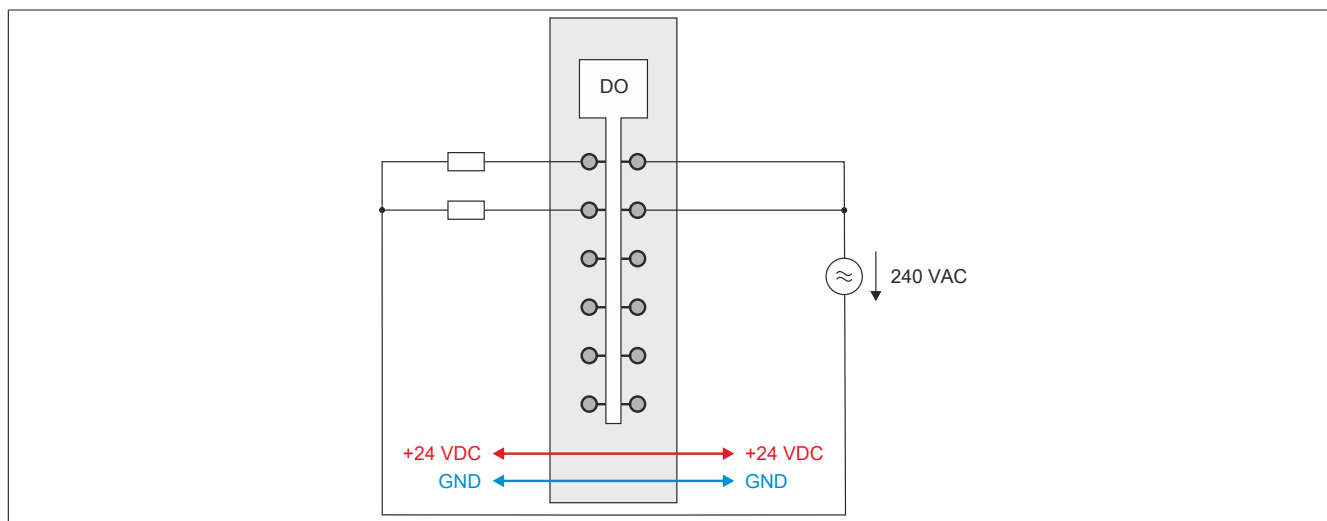

8 Output circuit diagram

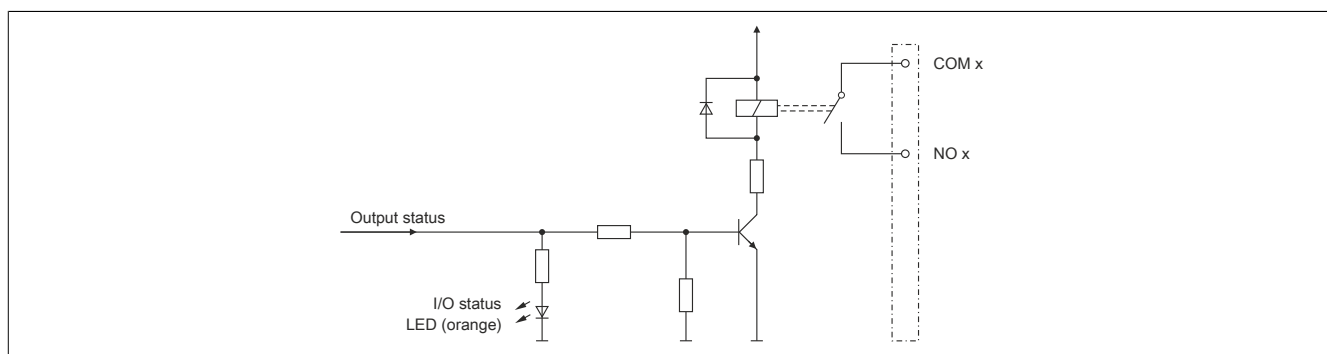

9 Electrical service life

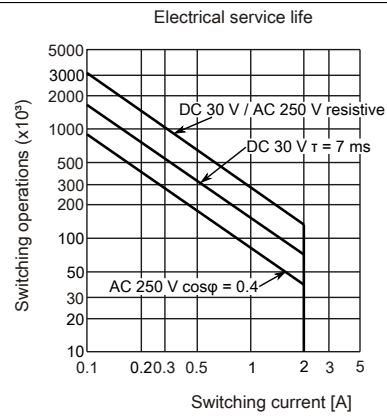

10 Register description

10.1 General data points

In addition to the registers described in the register description, the module has additional general data points. These are not module-specific but contain general information such as serial number and hardware variant.

General data points are described in section "Additional information - General data points" of the X20 system user's manual.

10.2 Function model 0 - Standard

Register	Fixed offset	Name	Data type	Read		Write	
				Cyclic	Acyclic	Cyclic	Acyclic
2	0	DigitalOutput	USINT			•	
		DigitalOutput01	Bit 0				
					
		DigitalOutput06	Bit 5				

Fixed modules require their data points to be in a specific order in the X2X frame. Cyclic access occurs according to a predefined offset, not based on the register address.

Acyclic access continues to be based on the register numbers.

10.3 Function model 254 - Bus Controller

Register	Offset ¹⁾	Name	Data type	Read		Write	
				Cyclic	Acyclic	Cyclic	Acyclic
2	0	Switching state of digital outputs 1 to 6	USINT			•	
		DigitalOutput01	Bit 0				
					
		DigitalOutput06	Bit 5				

1) The offset specifies where the register is within the CAN object.

10.3.1 Using the module on the bus controller

Function model 254 "Bus controller" is used by default only by non-configurable bus controllers. All other bus controllers can use additional registers and functions depending on the fieldbus used.

For detailed information, see section "Additional information - Using I/O modules on the bus controller" of the X20 user's manual (version 3.50 or later).

10.3.2 CAN I/O bus controller

The module occupies 1 digital logical slot on CAN I/O.

10.4 Digital outputs

The output status is transferred to the output channels with a fixed offset (<60 µs) based on the network cycle (SyncOut).

10.4.1 Switching state of digital outputs 1 to 6

Name:

DigitalOutput

DigitalOutput01 to DigitalOutput06

The switching state of digital outputs 1 to 6 are stored in this register.

Only function model 0 - Standard:

Setting "Packed outputs" in the Automation Studio I/O configuration determines whether all bits of this register should be applied individually as data points in the Automation Studio I/O assignment ("DigitalOutput01" to "DigitalOutput0x") or whether this register should be displayed as a single USINT data point ("DigitalOutput").

Data type	Values	Information
USINT	0 to 63	Packed outputs = On
	See bit structure.	Packed outputs = Off or Function model <> 0 - Standard

Bit structure:

Bit	Name	Value	Information
0	DigitalOutput01	0	Digital output 01 reset
		1	Digital output 01 set
...
5	DigitalOutput06	0	Digital output 06 reset
		1	Digital output 06 set

10.5 Minimum cycle time

The minimum cycle time specifies the time up to which the bus cycle can be reduced without communication errors occurring. It is important to note that very fast cycles reduce the idle time available for handling monitoring, diagnostics and acyclic commands.

Minimum cycle time
100 µs

10.6 Minimum I/O update time

The minimum I/O update time specifies how far the bus cycle can be reduced so that an I/O update is performed in each cycle.

Minimum I/O update time
Equal to the minimum cycle time