



MST 1-PHASE CONTROL AND ISOLATION TRANSFORMER

P: 630VA IN: 208...550VAC OUT: 2x115VAC

Single-phase - Control and Isolation Transformers
630 VA
Isolation class T 40/B
Other voltages on request.

[Link to Product](#)

Illustration

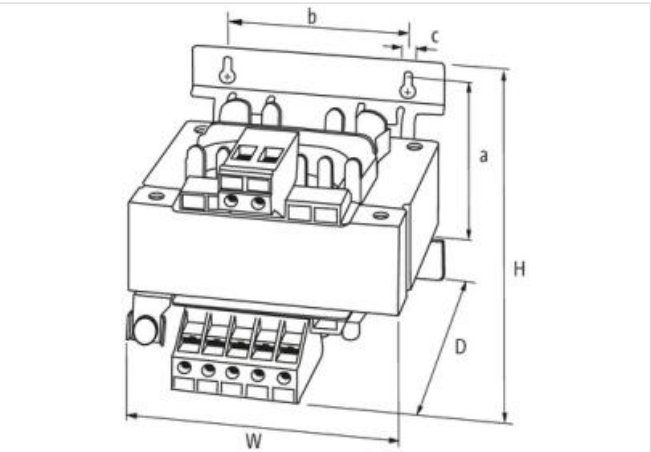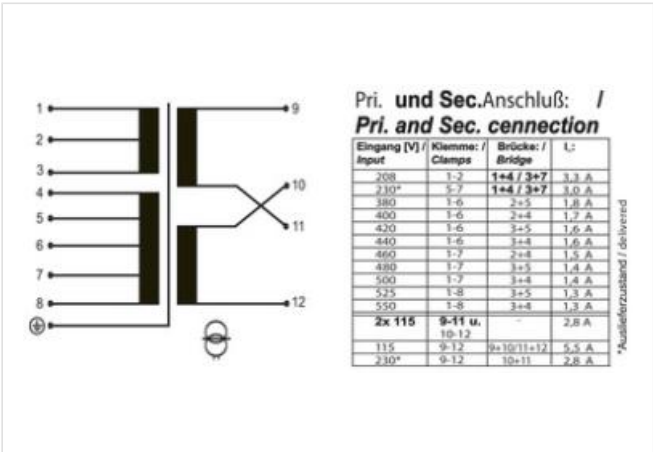

Product may differ from Image



General data	
Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Mounting method	Long-hole mounting or DIN-rail mountable TH35 (EN 60715)
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)
Test isolation voltage	4 kV (prim./sec.)
Drill hole Ø	4.8x8.4 mm
Fixing centers a x b x c	107.5x122 mm

Dimensions H×W×D 129.4×150×150 mm

Output

Output voltage 1× 230, 1× 115, 2× 115 V AC
Output rating 630 VA

Input

Input voltage 208, 230, 380, 400, 420, 440, 460, 480, 500, 525, 550 V AC
Inrush current 12 A (230 V AC)
Short-circuit current 15.6 A (230 V AC)
Input current 3.0 A (230 V AC); 1.5 A (460 V AC)
Frequency 50...60 Hz

Product article number of manufacturer 86149